

Advanced Performance and Wide Range of Selections in a Super-compact Size



- Only 5.5 × 5.5 mm with a built-in Amplifier.
- Maximum sensing distance: 2.5 mm. Stable detection even with workpiece fluctuations.
- Response frequency: 1 kHz.
- Low current consumption.



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

 Be sure to read *Safety Precautions* on page 6.

Ordering Information

Sensors [Refer to *Dimensions* on page 8.]

DC 2-Wire Models

Appearance	Sensing surface	Sensing distance	Model	
			Operation mode	
			NO	NC
	Top	1.6 mm	E2S-W11 1M *1, 3, 4	E2S-W12 1M *4
	Front		E2S-Q11 1M *1, 3	E2S-Q12 1M
	Top	2.5 mm	E2S-W21 1M *1, 3, 4	E2S-W22 1M *3, 4
	Front		E2S-Q21 1M *1, 2, 3, 4	E2S-Q22 1M *2, 3, 4

*1. Models with a different frequency are also available to prevent mutual interference. The model numbers are E2S-□□□B (e.g., E2S-W11B).

*2. Models with a different frequency are also available to prevent mutual interference. The model numbers are E2S-□□□C (e.g., E2S-Q21C).

*3. Models are also available with robotics (bend resistant) cables. Add “-R” to the model number.(e.g., E2S-W11-R 1M)

*4. Models are also available with M12 Pre-wired Smartclick Connector. Add “-M1TGJ 0.3M” to the model number. (e.g., E2S-W11-M1TGJ 0.3M)

DC 3-Wire Models

Appearance	Sensing surface	Sensing distance	Output configuration	Model	
				Operation mode	
				NO	NC
	Top	1.6 mm	NPN	E2S-W13 1M *1 *2	E2S-W14 1M
	Front			E2S-Q13 1M *1 *2	E2S-Q14 1M
	Top	2.5 mm		E2S-W23 1M *1 *2	E2S-W24 1M *2
	Front			E2S-Q23 1M *1 *2	E2S-Q24 1M *2
	Top	1.6 mm	PNP	E2S-W15 1M *1	E2S-W16 1M
	Front			E2S-Q15 1M *1	E2S-Q16 1M
	Top	2.5 mm		E2S-W25 1M *1	E2S-W26 1M
	Front			E2S-Q25 1M *1	E2S-Q26 1M

*1. Models with a different frequency are also available to prevent mutual interference. The model numbers are E2S-□□□B (e.g., E2S-W13B).


*2. Models are also available with robotics (bend resistant) cables. Add “-R” to the model number.(e.g., E2S-W13-R 1M)

Accessories (Order Separately)

Mounting Brackets Some Mounting Brackets are provided with the Sensor. Order other Mounting Brackets separately if required.
 [Refer to **Dimensions** on page 8.]

Appearance	Model	Quantity	Remarks
	Y92E-C1R6	1	Provided with E2S-□1□□. (fixed with one screw)
	Y92E-C2R5		Provided with E2S-□2□□. (fixed with one screw)
	Y92E-D1R6		For E2S-□1□□ (fixed with two screws)
	Y92E-D2R5		For E2S-□2□□ (fixed with two screws)

Model Number Legend

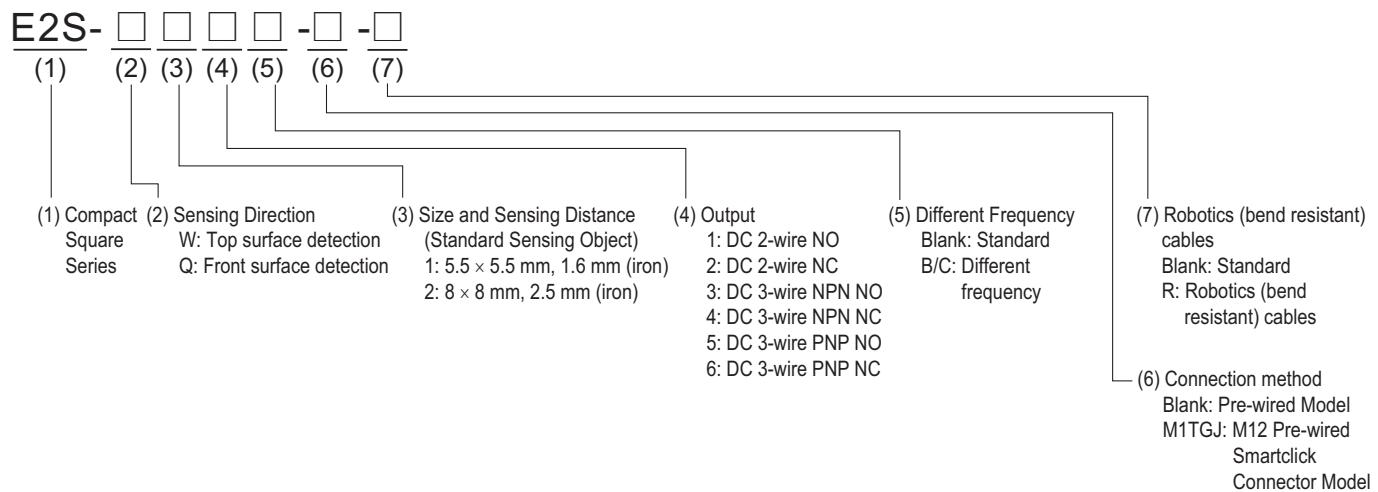

Ratings and Specifications

DC 2-Wire Models

Model	E2S-W11 E2S-W12	E2S-Q11 E2S-Q12	E2S-W21 E2S-W22	E2S-Q21 E2S-Q22
Sensing surface	Top	Front	Top	Front
Sensing distance	1.6 mm $\pm 15\%$		2.5 mm $\pm 15\%$	
Set distance	0 to 1.2 mm		0 to 1.9 mm	
Differential travel	10% max. of sensing distance			
Detectable object	Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 4.)			
Standard sensing object	Iron, 12 \times 12 \times 1 mm		Iron, 15 \times 15 \times 1 mm	
Response frequency *	1 kHz min.			
Power supply voltage (operating voltage range)	12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.			
Leakage current	0.8 mA max.			
Control output	Load current	3 to 50 mA max.		
	Residual voltage	3 V max. (under load current of 50 mA with cable length of 1 m)		
Indicators	<input type="checkbox"/> 1 Models: Operation indicator (orange), Setting indicator (green) <input type="checkbox"/> 2 Models: Operation indicator (orange)			
Operation mode (with sensing object approaching)	<input type="checkbox"/> 1 Models: NO <input type="checkbox"/> 2 Models: NC	Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 5 for details.		
Protection circuits	Output short-circuit protection, Surge suppressor			

* The response frequency is an average value.

Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

DC 3-Wire Models

Model	E2S-W13 E2S-W14	E2S-Q13 E2S-Q14	E2S-W23 E2S-W24	E2S-Q23 E2S-Q24	E2S-W15 E2S-W16	E2S-Q15 E2S-Q16	E2S-W25 E2S-W26	E2S-Q25 E2S-Q26
Sensing surface	Top	Front	Top	Front	Top	Front	Top	Front
Sensing distance	1.6 mm $\pm 15\%$		2.5 mm $\pm 15\%$		1.6 mm $\pm 15\%$		2.5 mm $\pm 15\%$	
Set distance	0 to 1.2 mm		0 to 1.9 mm		0 to 1.2 mm		0 to 1.9 mm	
Differential travel	10% max. of sensing distance							
Detectable object	Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 4.)							
Standard sensing object	Iron, 12 \times 12 \times 1 mm		Iron, 15 \times 15 \times 1 mm		Iron, 12 \times 12 \times 1 mm		Iron, 15 \times 15 \times 1 mm	
Response frequency *	1 kHz min.							
Power supply voltage (operating voltage range)	12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.							
Current consumption	13 mA max. at 24 VDC (no-load)							
Control output	Load current	NPN open-collector output, 50 mA max. (30 VDC max.)		PNP open-collector output, 50 mA max. (30 VDC max.)				
	Residual voltage	1.0 V max. (under load current of 50 mA with cable length of 1 m)						
Indicators	Operation indicator (orange)							
Operation mode (with sensing object approaching)	<input type="checkbox"/> 3 Models: NO <input type="checkbox"/> 4 Models: NC Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 5 for details.			<input type="checkbox"/> 5 Models: NO <input type="checkbox"/> 6 Models: NC Refer to the timing charts under <i>I/O Circuit Diagrams</i> on page 5 for details.				
Protection circuits	Power supply reverse polarity protection, Surge suppressor, Output short-circuit protection							

* The response frequency is an average value.

Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.


Specifications

Item	Model	E2S-□□□
Ambient temperature range	Operating: -25 to 70°C (with no icing or condensation), Storage: -40 to 85°C (with no icing or condensation)	
Ambient humidity range	Operating: 35% to 90% (with no condensation), Storage: 35% to 95% (with no condensation)	
Temperature influence	$\pm 15\%$ max. of sensing distance at 23°C in the temperature range of -25 to 70°C	
Voltage influence	$\pm 2.5\%$ max. of sensing distance at rated voltage in rated voltage $\pm 10\%$ range	
Insulation resistance	50 MΩ min. (at 500 VDC) between current-carrying parts and case	
Dielectric strength	1,000 VAC for 1 min between current-carrying parts and case	
Vibration resistance	Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions	
Shock resistance	Destruction: 500 m/s ² 3 times each in X, Y, and Z directions	
Degree of protection	IEC 60529 IP67	
Connection method	Pre-wired Models (Standard cable length: 1 m)	
Weight (packed state)	Approx. 10 g	
Materials	Case	Polyarylate resin
Accessories	Mounting Brackets	


Engineering Data (Reference Value)

Sensing Area

E2S-W1□/-W2□

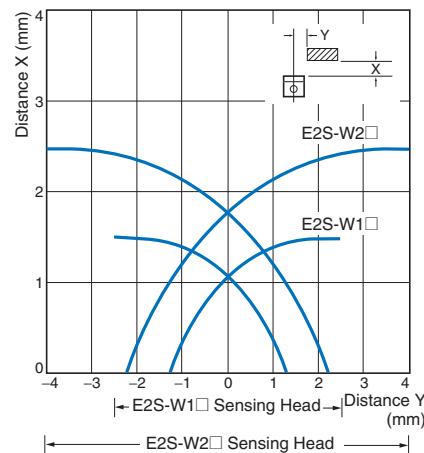


E2S-Q1□/-Q2□

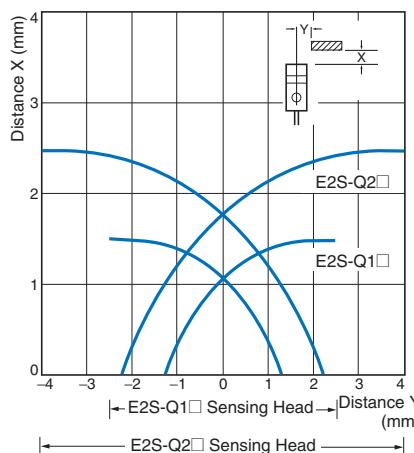


Influence of Sensing Object Size and Material

E2S-W1□/-Q1□



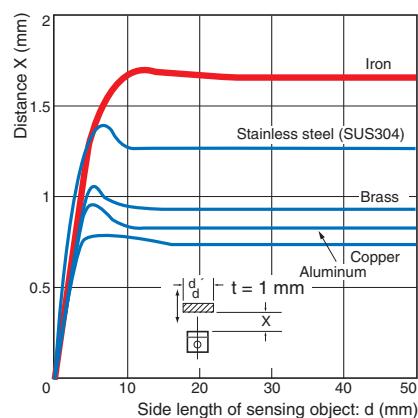


E2S-W2□/-Q2□







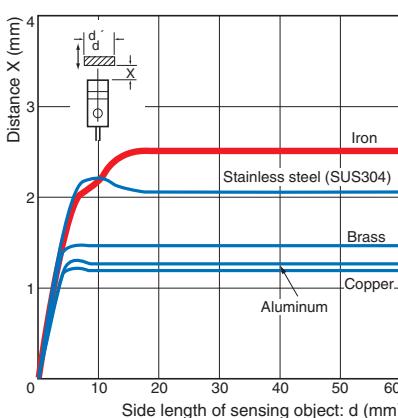


I/O Circuit Diagrams

DC 2-Wire Models

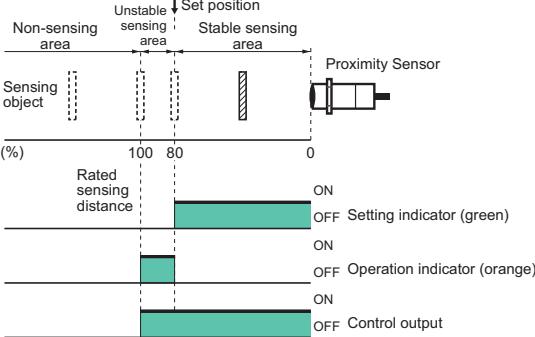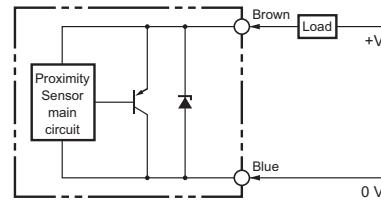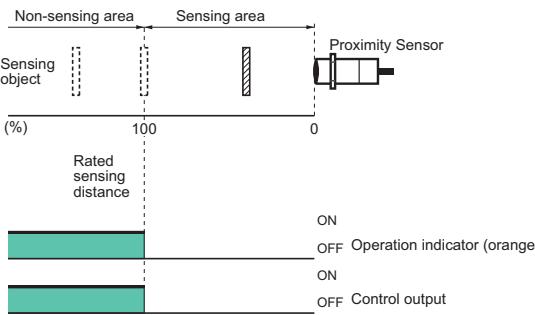Operation mode	Model	Timing chart	Output circuit
NO	E2S-W11 E2S-W21 E2S-Q11 E2S-Q21	 <p>Timing chart details: - Set position: 80% to 100% - Non-sensing area: 0% to 80% - Unstable sensing area: 80% to 100% - Stable sensing area: 100% to 100% - Rated sensing distance: 100% - ON: Setting indicator (green) - OFF: Setting indicator (green) - ON: Operation indicator (orange) - OFF: Operation indicator (orange) - ON: Control output - OFF: Control output</p>	 <p>Note: The load can be connected to either the +V or 0 V side.</p>
NC	E2S-W12 E2S-W22 E2S-Q12 E2S-Q22	 <p>Timing chart details: - Non-sensing area: 0% to 100% - Sensing area: 100% to 100% - Rated sensing distance: 100% - ON: Operation indicator (orange) - OFF: Operation indicator (orange) - ON: Control output - OFF: Control output</p>	

DC 3-Wire Models

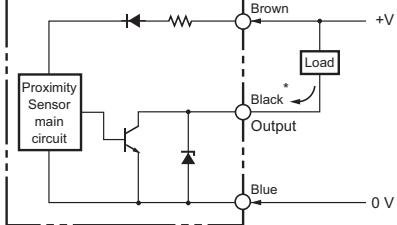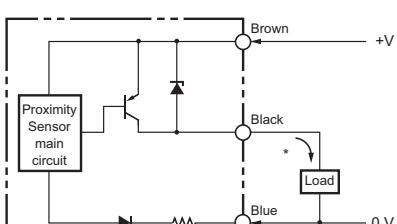Operation mode	Output configuration	Model	Timing chart	Output circuit
NO	NPN	E2S-W13 E2S-W23 E2S-Q13 E2S-Q23	 <p>Timing chart details: - Sensing object: Present (green bar), Not present (white bar) - Output transistor (load): ON (green bar), OFF (white bar) - Operation indicator (orange): ON (green bar), OFF (white bar)</p>	
		E2S-W14 E2S-W24 E2S-Q14 E2S-Q24	 <p>Timing chart details: - Sensing object: Present (green bar), Not present (white bar) - Output transistor (load): ON (green bar), OFF (white bar) - Operation indicator (orange): ON (green bar), OFF (white bar)</p>	 <p>* Load current: 50 mA max.</p>
		E2S-W15 E2S-W25 E2S-Q15 E2S-Q25	 <p>Timing chart details: - Sensing object: Present (green bar), Not present (white bar) - Output transistor (load): ON (green bar), OFF (white bar) - Operation indicator (orange): ON (green bar), OFF (white bar)</p>	
		E2S-W16 E2S-W26 E2S-Q16 E2S-Q26	 <p>Timing chart details: - Sensing object: Present (green bar), Not present (white bar) - Output transistor (load): ON (green bar), OFF (white bar) - Operation indicator (orange): ON (green bar), OFF (white bar)</p>	 <p>* Load current: 50 mA max.</p>

Safety Precautions

Be sure to read the precautions for all models in the website at: <http://www.ia.omron.com/>.

Warning Indications

⚠ WARNING	Warning level Indicates a potentially hazardous situation which, if not avoided, will result in minor or moderate injury, or may result in serious injury or death. Additionally there may be significant property damage.
Precautions for Safe Use	Supplementary comments on what to do or avoid doing, to use the product safely.
Precautions for Correct Use	Supplementary comments on what to do or avoid doing, to prevent failure to operate, malfunction or undesirable effect on product performance.

Meaning of Product Safety Symbols

	General prohibition Indicates the instructions of unspecified prohibited action.
	Caution, explosion Indicates the possibility of explosion under specific conditions.

⚠ WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly.

Do not use it for such purposes.



Otherwise, explosion may result.

Never use the product with an AC power supply.



Precautions for Safe Use

The following precautions must be observed to ensure safe operation.

1. Do not use the product in an environment where flammable or explosive gas is present.
2. Do not attempt to disassemble, repair, or modify the product.
3. Do not use a voltage that exceeds the rated operating voltage range. Applying a voltage that is higher than the operating voltage range may result in damage or burnout.
4. Be sure that the power supply polarity and other wiring is correct. Incorrect wiring may cause explosion or burnout.
5. If the power supply is connected directly without a load, the internal elements may explode or burn. Be sure to insert a load when connecting the power supply.
6. Dispose of the product according to applicable regulations (laws).

Precautions for Correct Use


Do not use this product under ambient conditions that exceed the ratings.

Operating Environment

1. Do not install the product in the following locations. Doing so may result in product failure or malfunction.
 - (1) Outdoor locations directly subject to sunlight, rain, snow, water droplets, or oil.
 - (2) Locations subject to atmospheres with chemical vapors, in particular solvents and acids.
 - (3) Locations subject to corrosive gases.
2. The Sensor may malfunction if used near ultrasonic cleaning equipment, high-frequency equipment, transceivers, cellular phones, inverters, or other devices that generate a high-frequency electric field. Please refer to the Precautions for Correct Use on the OMRON website (www.ia.omron.com) for typical measures.
3. Laying the Proximity Sensor wiring in the same conduit or duct as high-voltage wires or power lines may result in incorrect operation and damage due to induction. Wire the Sensor using a separate conduit or independent conduit.
4. The following conditions shall be observed if you use the product under an environment using cutting oil that may affect product's life and/or performance.
 - Usage under the cutting oil condition designated by the specification
 - Usage under the cutting oil dilution ratio recommended by its manufacturer
 - Usage in oil or water is prohibited
 Impact on the product life may differ depending on the oil you use. Before using the cutting oil, make sure that it should not cause deterioration or degradation of sealing components.
5. Never use thinner or other solvents. Otherwise, the Sensor surface may be dissolved.
6. When turning on the power by influence of temperature environment, an output mis-pulse sometimes occurs. After the sensor has passed for 300 ms after turning on, please use in the stable state.
7. The sensor is adjusted with a high degree of accuracy, so do not use in the environment with sudden temperature change.


AND Connection of Proximity Sensors (DC 2-Wire)

Two or more sensors cannot be connected in series on the AND circuit. Use them via a relay as shown on the figure.

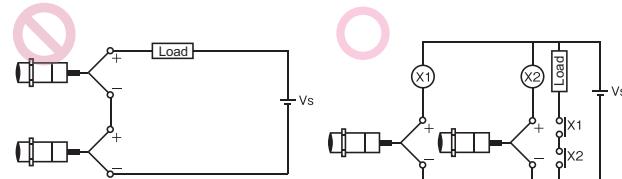

OR Wiring of Proximity Sensors (DC 2-Wire)

As a general principle, two or more sensors cannot be used in parallel on the OR circuit. It is possible only when sensors do not operate simultaneously and loads do not need to be maintained. When loads need to be maintained, use the sensors via a relay as shown on the figure.

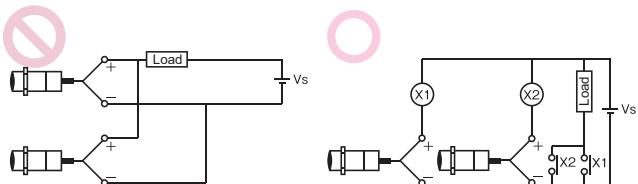


● Design

Influence of Surrounding Metal


- When mounting the Sensor within a metal panel, ensure that the clearances given in the following table are maintained. Failure to maintain these distances may cause deterioration in the performance of the Sensor.

- Models with Top Sensing Surface

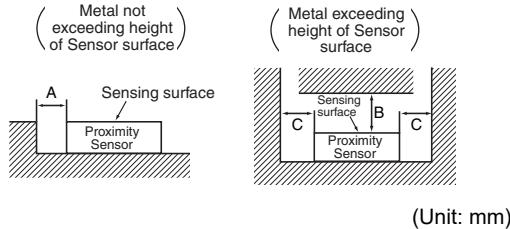

Model	Distance	A	B	C
E2S-W1□		0	8	2
E2S-W2□			15	10

- Models with Front Sensing Surface

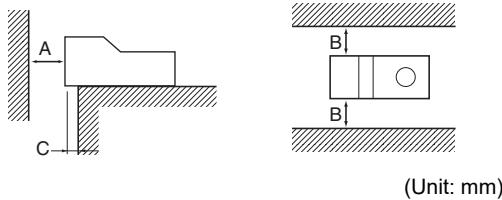


Model	Distance	A	B	C
E2S-Q1□		8	3	2
E2S-Q2□		15	10	3

Mutual Interference

When installing Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained.

- Models with Top Sensing Surface
- Models with Front Sensing Surface

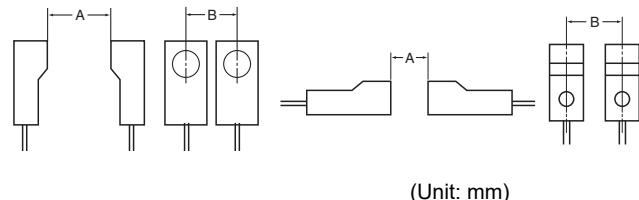

Model	Distance	A	B
E2S-W(Q)1□		50 (40) *1	20 (5.5) *1, *2
E2S-W(Q)2□		75 (50) *1	25 (8) *1, *2


*1. Values in parentheses apply to Sensors operating at different frequencies.

*2. Mutual interference will not occur for close-proximity mounting if models with different frequencies are used together.

● Mounting

E2S-W1/Q1


Please use the set distance within 1.2 mm.

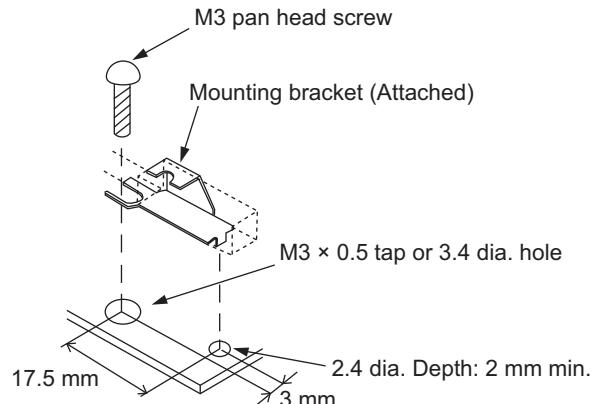

E2S-W2/Q2

When mounting with screw, use washers and use a tightening torque of 0.7 N·m or less.

Please use the set distance within 1.9 mm.

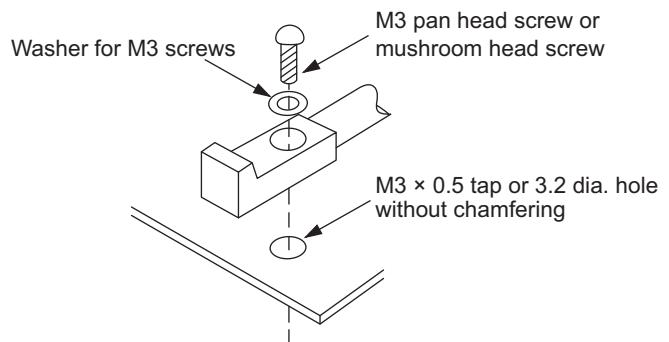

Applicable e-CON Connector Models and Manufacturers

The companies and model number of e-CON connections that can be used with Sensor cables are listed in the following table. Confirm applicability when purchasing e-CON connectors for connection to Pre-wired Sensors.

Model	Applicable e-CON Connector	Manufacturer
E2S-W□3/4	XN2A-1470 Cable Plug Connector	OMRON
E2S-Q□3/4		


Dimensions

(Unit: mm)

Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

Sensors


E2S-W1□

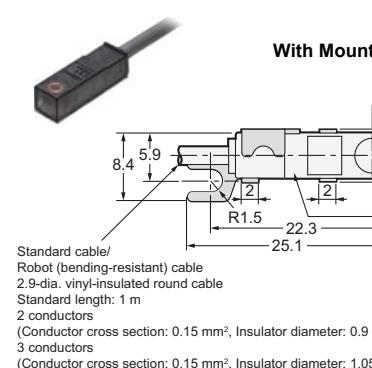

With Mounting Bracket Attached

*E2S-W11□ Operation indicator (orange), Setting indicator (green)
 E2S-W12□ Operation indicator (orange)
 E2S-W13□ E2S-W14□ E2S-W15□ E2S-W16□ Operation indicator (orange)


E2S-Q1□

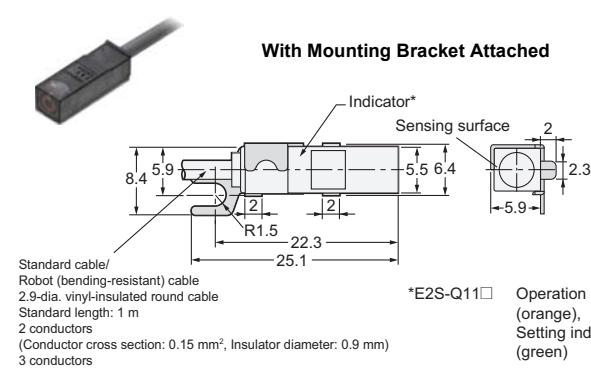

With Mounting Bracket Attached

*E2S-Q11□ Operation indicator (orange), Setting indicator (green)
 E2S-Q12□ Operation indicator (orange)
 E2S-Q13□ E2S-Q14□ E2S-Q15□ E2S-Q16□ Operation indicator (orange)


E2S-W2□

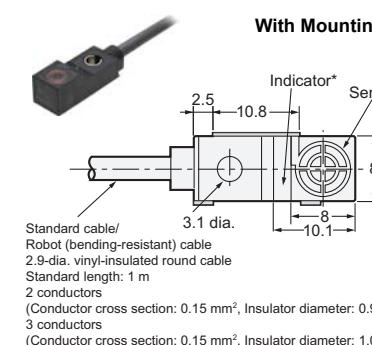

With Mounting Bracket Attached

3.1-dia. mounting hole
 *E2S-W21□ Operation indicator (orange), Setting indicator (green)
 E2S-W22□ Operation indicator (orange)
 E2S-W23□ E2S-W24□ E2S-W25□ E2S-W26□ Operation indicator (orange)

E2S-Q2□

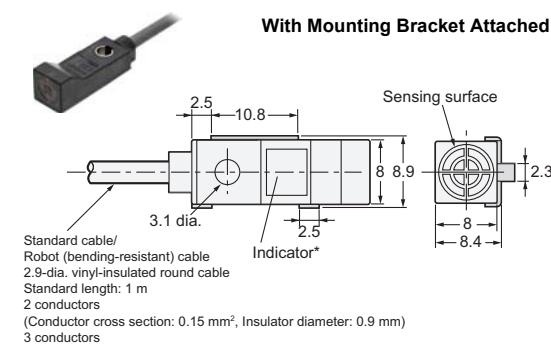


With Mounting Bracket Attached

3.1-dia. mounting hole
 *E2S-Q21□ Operation indicator (orange), Setting indicator (green)
 E2S-Q22□ Operation indicator (orange)
 E2S-Q23□ E2S-Q24□ E2S-Q25□ E2S-Q26□ Operation indicator (orange)

Accessories (Order Separately)


Mounting Bracket

Y92E-C1R6

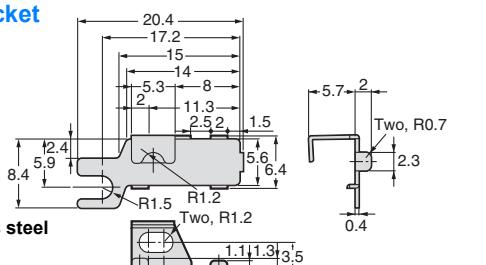



Material: Stainless steel (SUS304)

*Provided with E2S-□1□□.

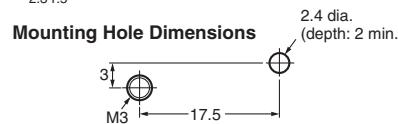


Mounting Bracket

Y92E-D1R6





Material: Stainless steel (SUS304)

Photoelectric Sensor Accessory is installed (Example of E2S-Q11)



Mounting Bracket


Y92E-C2R5



Material: Stainless steel (SUS304)


* Provided with E2S-□2□□.

Mounting Hole Dimensions




Mounting Bracket

Y92E-D2R5

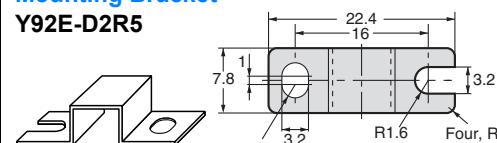


Material: Stainless steel (SUS304)



* Inside dimension

Photoelectric Sensor Accessory is installed (Example of E2S-Q21)

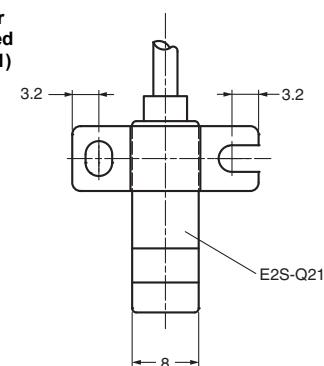

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

2025.12

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2025 All Right Reserved.