


New AI feature makes the toughest defect inspection effortless for everyone



Have you ever tried implementing AI to automate your visual inspections, only to regret it afterwards?

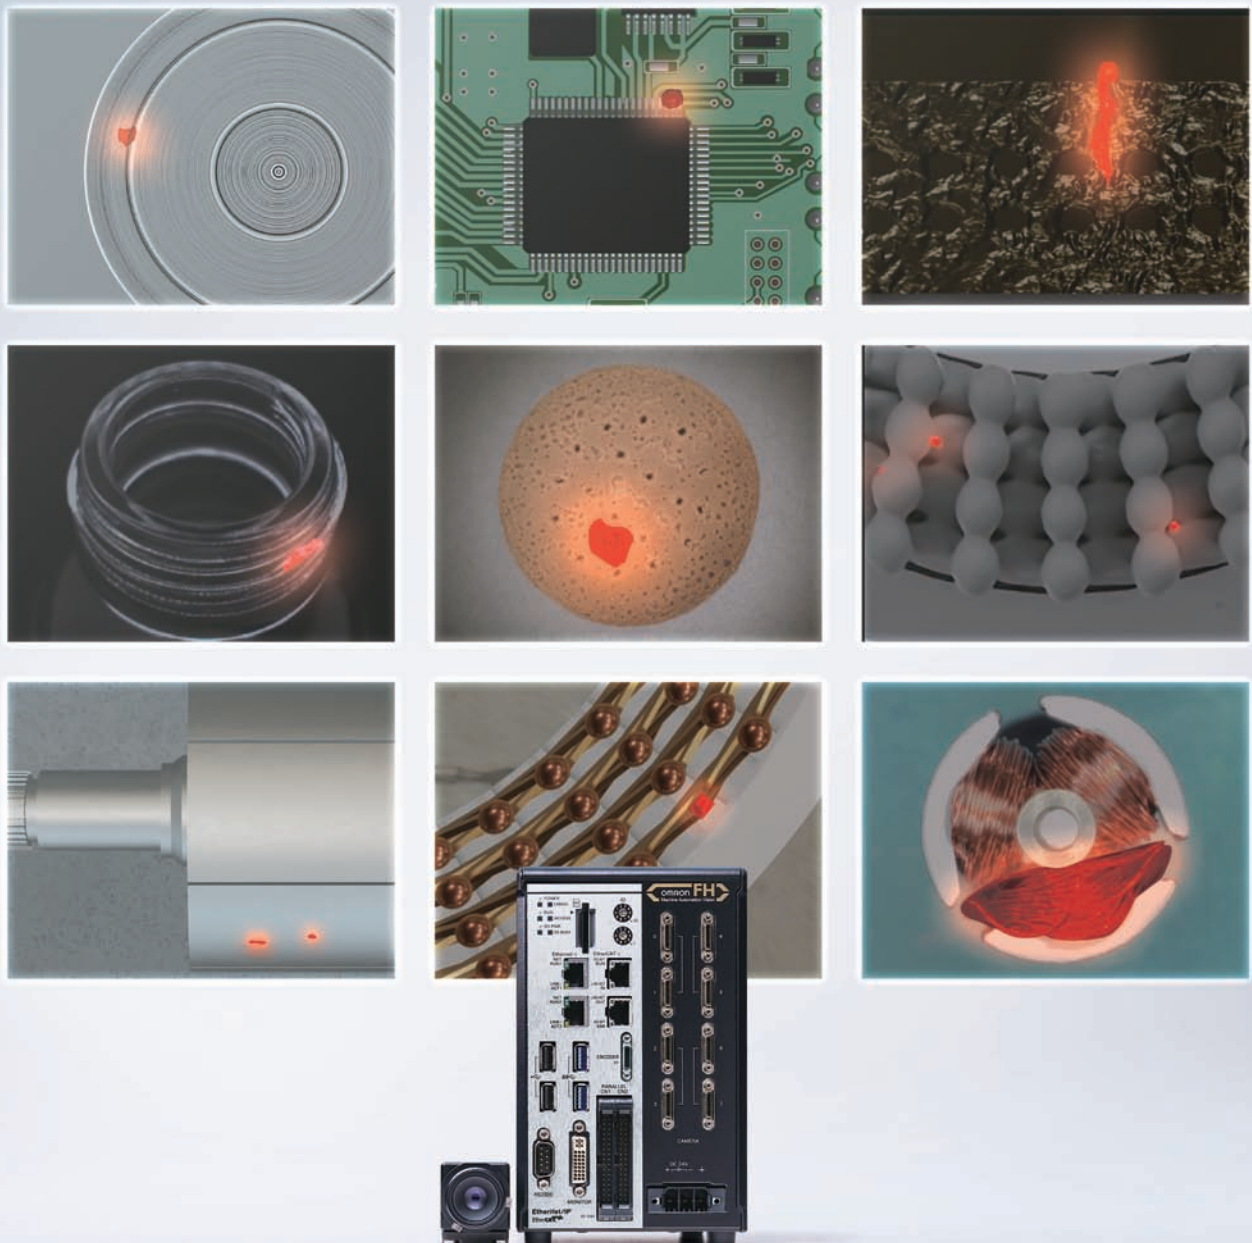

We implemented AI, and ended up with more over detection than with visual inspections...

We can't figure out the optimal settings, and we're just creating and evaluating AI models over and over again...

Custom-built for AI implementation, hardware and software are difficult to maintain long term...

OMRON delivers AI that lets you easily conduct advanced inspections — with no special skills and no regrets!



► Solve the three main causes of overdetection

New AI defect detection algorithm >P.4

► Build the optimal AI model with a single click

New self-learning AI >P.6

► Save maintenance effort with all-in-one solution


Implement AI
with the tried-and-trusted FH Series >P.8

Solve the three main causes of overdetection


New AI defect detection algorithm

Extracting just the defects is difficult


1 Shape/color variation

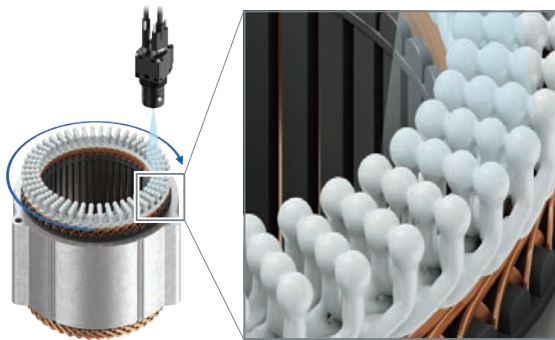

Coated portion
Inspection of stator powder coating

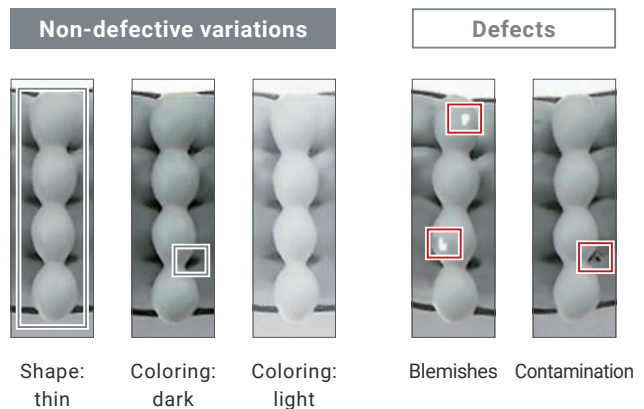


2 Complex background

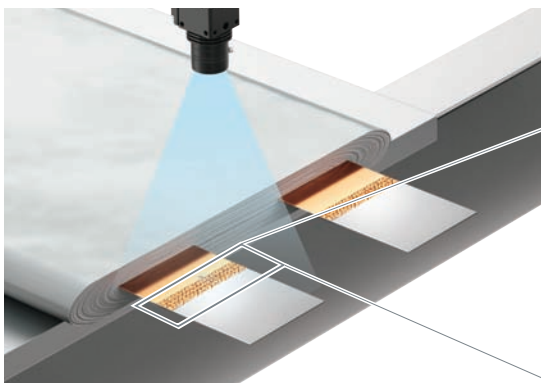


Inspection of laminated battery tab welding

Goal: Judge products with weld marks as "non-defective" and only those with cracks as "defective"

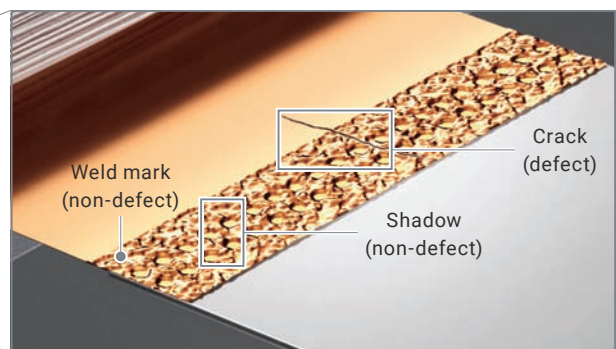


3 Gloss variations

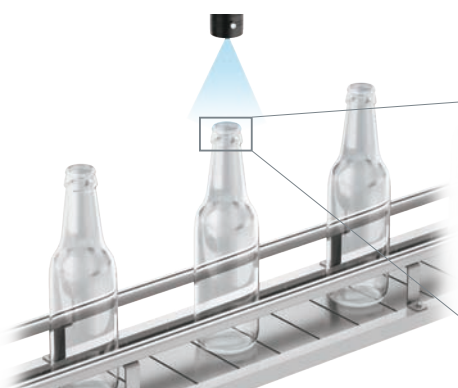

Inspection for chips on glass bottle finishes


Goal: Judge products with gloss variation as "non-defective" and only those that are chipped as "defective"

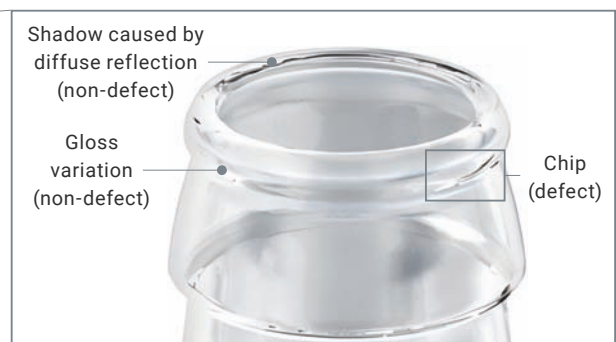

Stably detects just the defects to significantly reduce overdetection

1 Variations in shape or color are ignored, and only blemishes and dirt are detected

Input image




Contamination

Previous methods

Overdetection of
shape/color variations

AI Defect Inspection




Only contamination is detected



See video
demonstrating
stable detection,
even with shape/
color variations

2 Weld marks are ignored, and only cracks are detected

Input image




Crack (defect)

Previous methods

Overdetection of
weld marks and shadows

AI Defect Inspection



Only cracks are detected



See video
demonstrating
stable detection,
even with
complex
background


3 Gloss variations are ignored, and only chips are detected

Input image



Chip (defect)

Previous methods

Overdetection of
gloss variations

AI Defect Inspection



Only chips are detected




See video
demonstrating
stable detection,
even with
gloss variation

Build the optimal AI model with a single click

New self-learning AI

Automates model building, a bottleneck in AI implementation


Our new self-learning AI automatically executes the repetitive task of learning and result-checking necessary for developing AI detection performance. The system selects the best images for learning, so anyone can build the optimal AI model—no expert knowledge required. This dramatically saves time, not only for initial configuration but also when creating an AI model every time a new product is added.

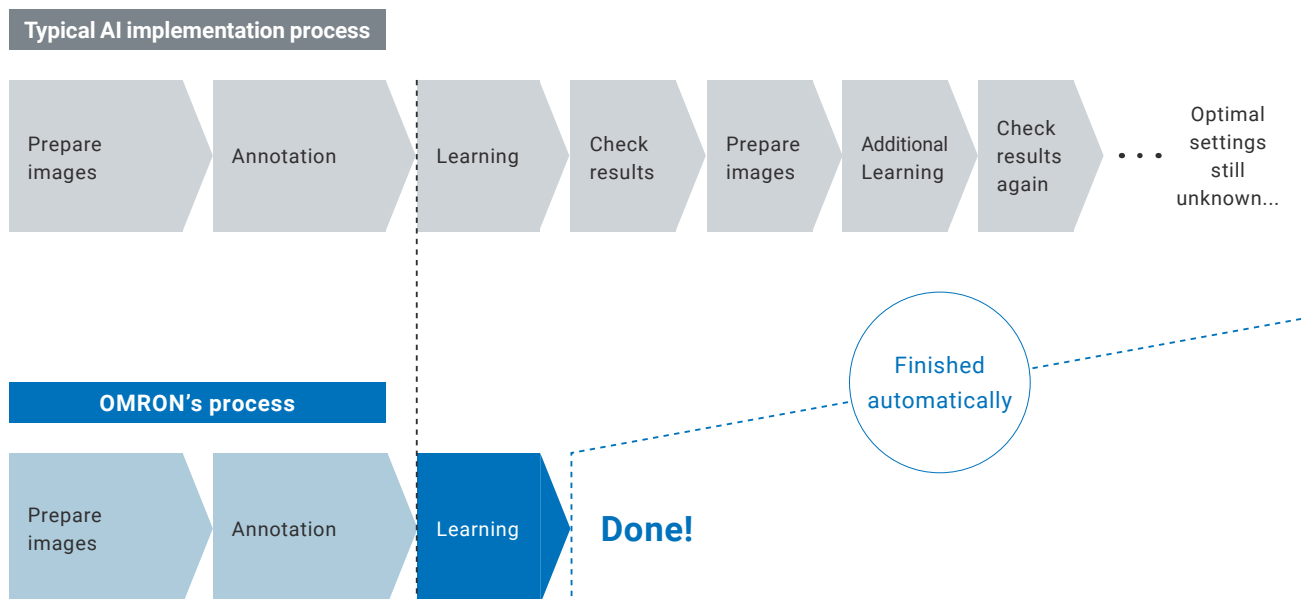

Auto-adjusts to eliminate overdetection^{*1}

Our new self-learning AI eliminates overdetection by automatically selecting and learning the optimal images.

Trials can be started in no time, even with a limited number of sample images. Furthermore, by using the same sample images, you can achieve the same learning results, ensuring reproducibility for reliable use in manufacturing sites.

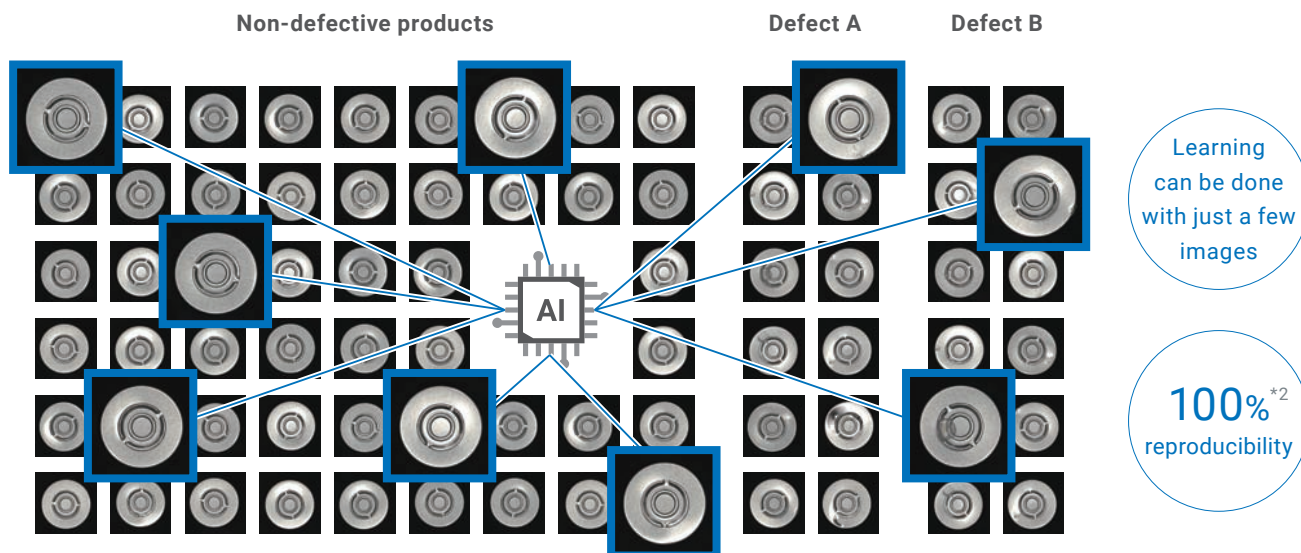

^{*1}. Detection rate is for all sample images stored for preliminary learning.

^{*2}. Always the same results for the same dataset

See video
demonstration
of easy
configuration




Configuration can be completed in 3 steps

STEP 1

Prepare images

Prepare your images, separated into “non-defective” and “defective” products.

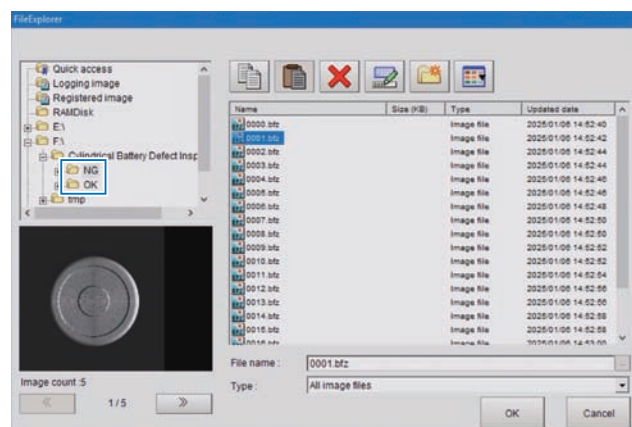

STEP 2


Annotation

Mark the defects, as if you were pointing them out to another person.


One click to fill

Patent pending ^{*3}

Use the Annotation Assist function that helps fill a defective area with one click. See the video for details.



Dent is marked



Scratch is marked


^{*3}. “Patent pending” and “Patented” refer to patent status in Japan (as of September 2025).

STEP 3

Learning

Simply click the [Start learning] button to run self-learning. Configuration will be completed in a matter of minutes. ^{*4}

^{*4}. The setting time varies depending on the conditions of the learning process.

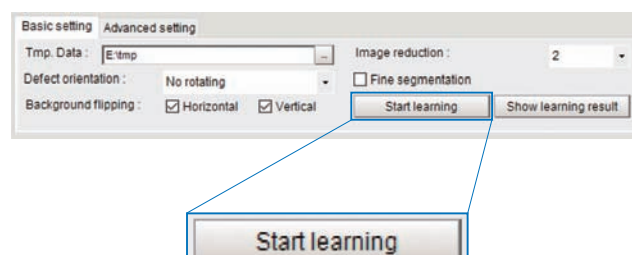

Done!

Save maintenance effort with all-in-one solution

Implement AI with the tried-and-trusted FH Series

Simple system configuration perfect for manufacturing sites

You can use the AI Defect Inspection feature just by adding its license to your FH Controller.


This allows you to avoid the common irony of AI tool implementation hiking up maintenance costs for image inspection devices.

Typical AI tools

- The vast number of possible hardware combinations makes selection and assessment difficult
- Hard to set up component plan with industry-level long-term guarantee



- Tool just for AI, which means having to learn all over again...
- Software is subscription license, and must be budgeted for every year

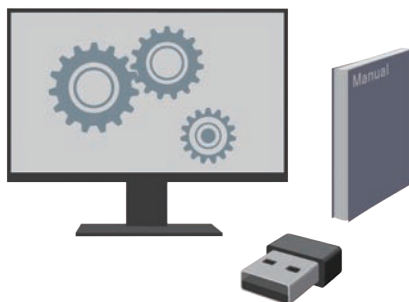

FH Series

- All-in-one vision controller
- Stable, long-term offering, complete with support in the event of failure



FH Vision Sensor Controller
FH-5552(-□□)/FH-5551(-□□)

Tried-and-tested
FH Series

- Machine control network
Cycle: 125μs
EtherCAT
- Data output
High-speed interface:
USB 3.0

- AI added to vision system you're familiar with
- No need for annual budgeting or contract renewals



AI Defect Inspection Software Installer
FH-UMLIC-08


Perpetual
license

AI and rule-based processing can be included in same inspection flow

Flow chart UI enables flexible design


AI processing can be easily added to your existing inspection flow, allowing you to make effective use of your assets.

Example: Appearance inspection of IC chip

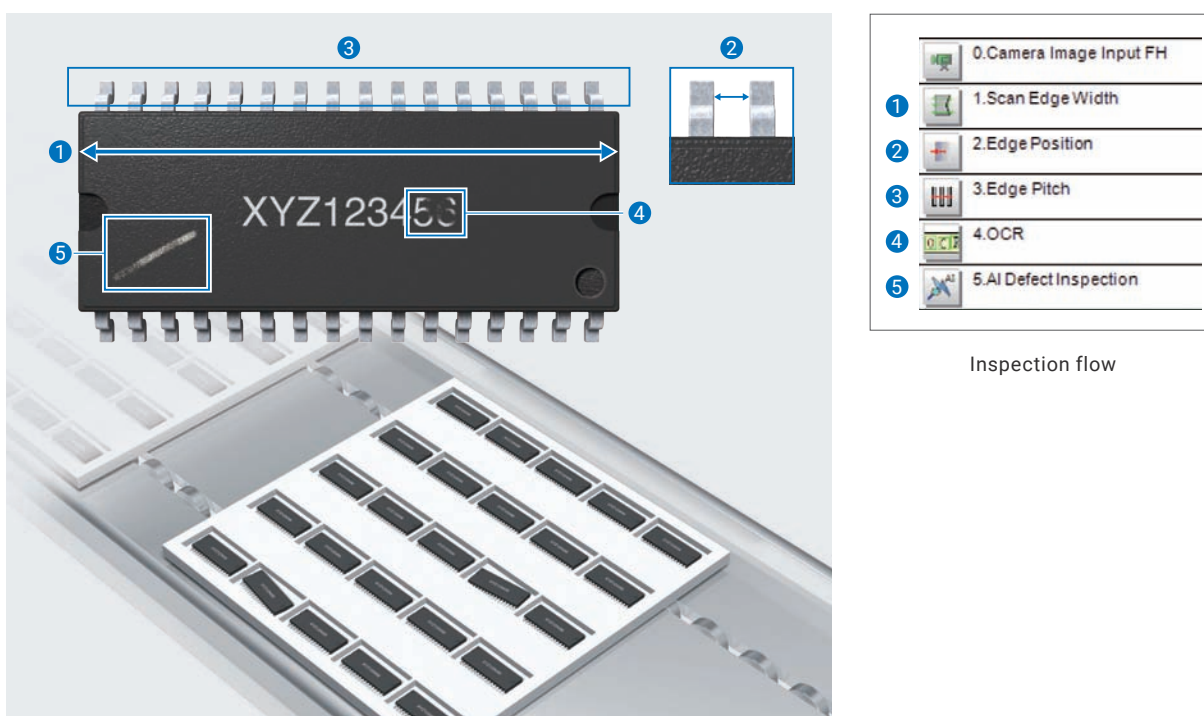

Enables quantitative judgment in AI inspection

Quantitatively accounting for AI inspection results can be difficult. This new function enables you to quantify the defects by incorporating rule-based inspections, allowing for easily explainable judgments.

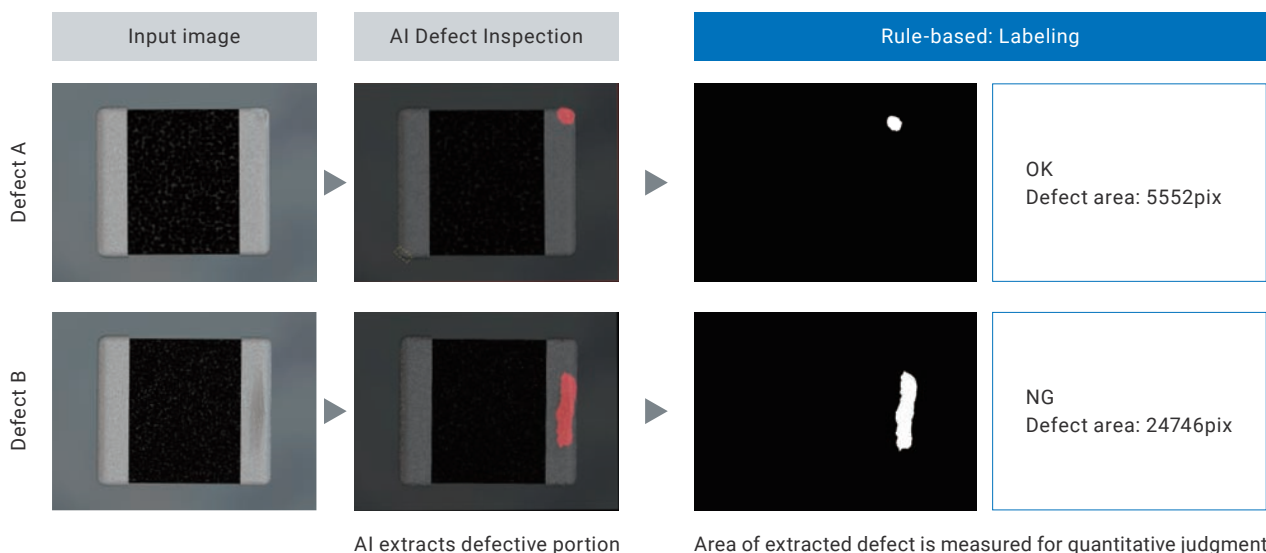

AI Defect Inspection Solutions


With AI Defect Inspection, stable detection can be achieved with simple training for cases that conventional image processing has struggled to distinguish between non-defective and defective products, leading to over-detection.

Automotive Parts

Inspection for coil winding defects

Shape/color variation


Gloss variations

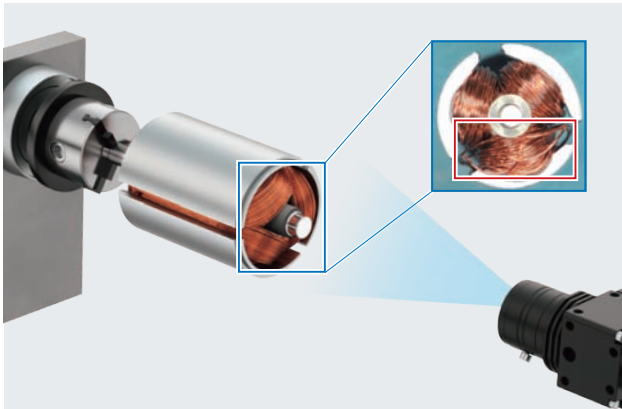

Inspection for welding spatter on stators


Shape/color variation

Gloss variations

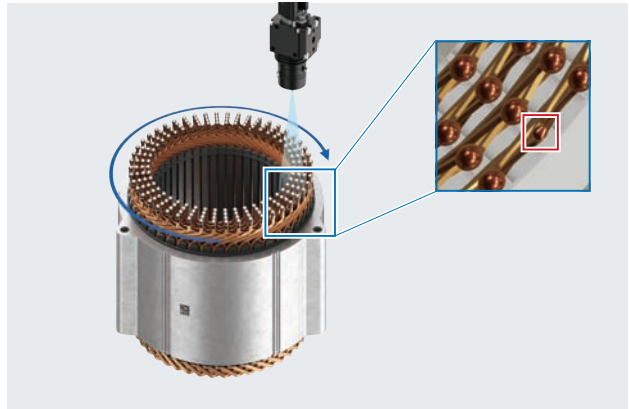


Inspection of stator powder coating

Shape/color variation

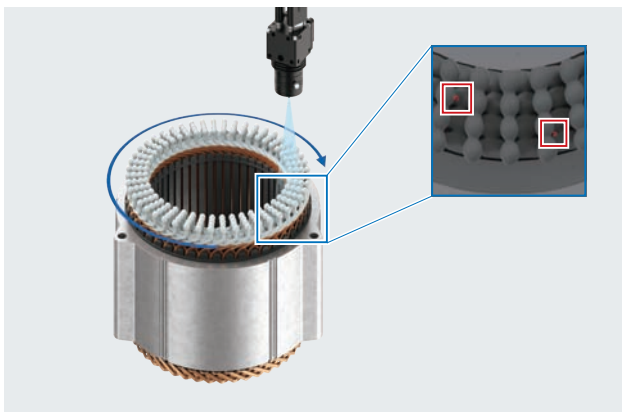


Inspection for scratches on motor cores

Complex background

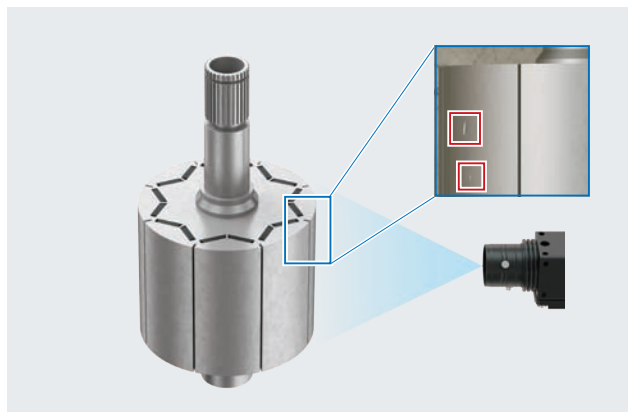

Inspection for scratches/dents on cylindrical batteries


Shape/color variation

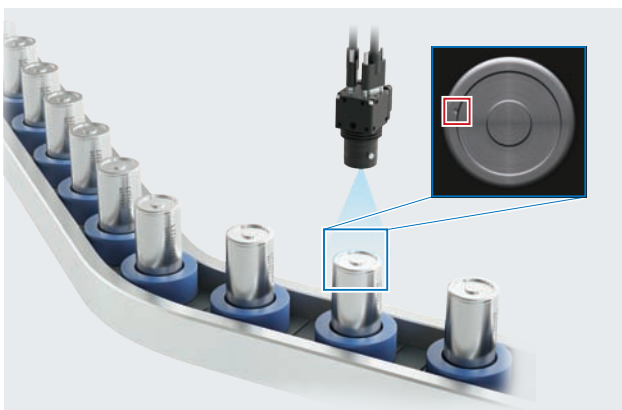

Inspection of laminated battery tab welding

Shape/color variation


Complex background

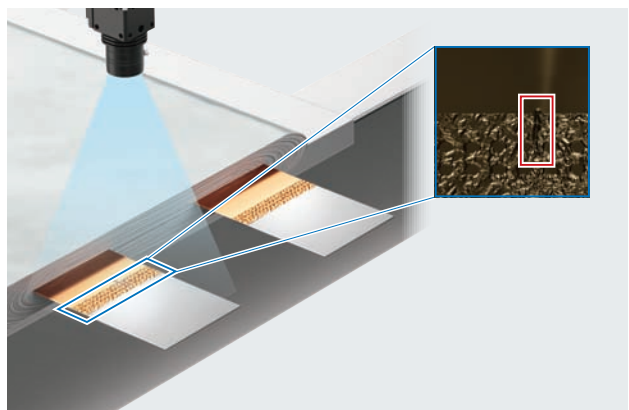

Electronic Components

Inspection for
scratches/dents on condensers


Complex background

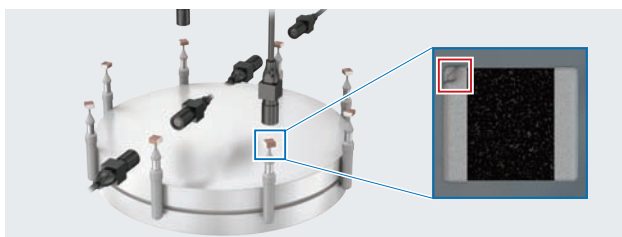

Inspection for
solder splatter on PCBs

Complex background


Gloss variations

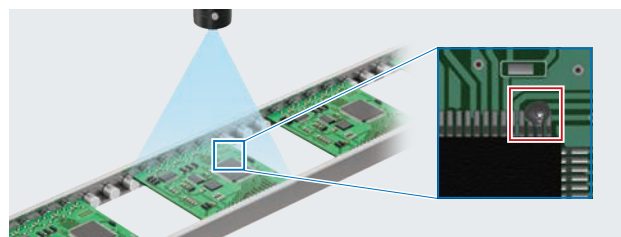

Inspection for
soldering defects


Shape/color variation

Gloss variations

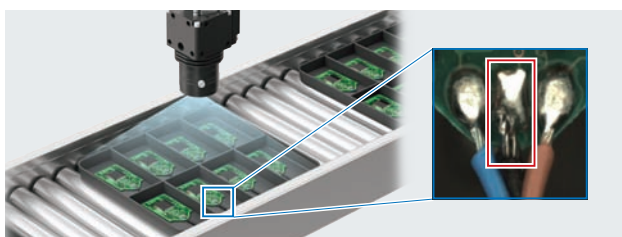

Inspection for
contaminants after wire bonding

Shape/color variation

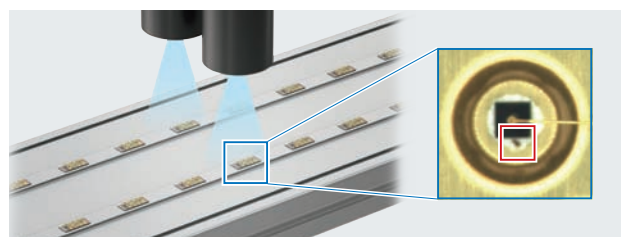


Foods/Pharmaceuticals

Inspection for
package sealing defects


Shape/color variation

Complex background

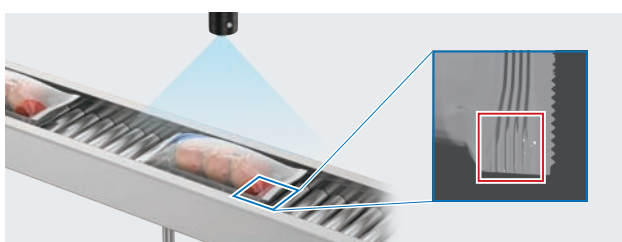


Inspection for
chips on glass bottle finishes

Gloss variations

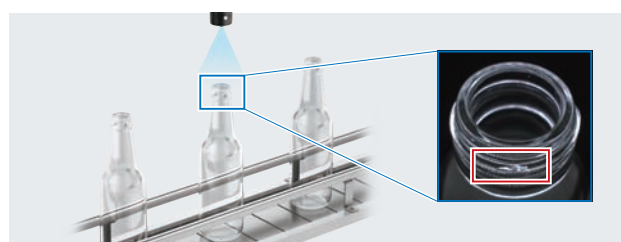


Inspection for
burns/chips on biscuits

Shape/color variation

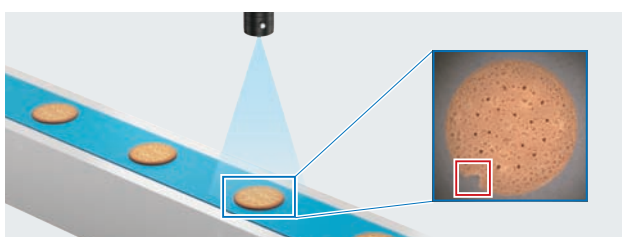

Inspection for
scratches on vial caps

Shape/color variation

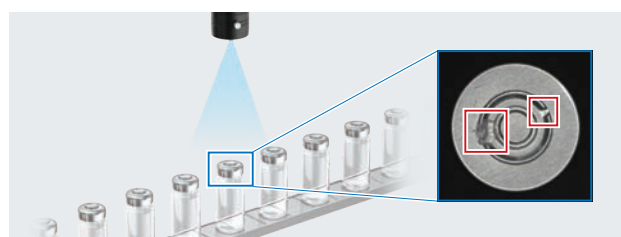

High-speed, large-capacity controller supporting AI-powered and standard inspections



4 core High speed

Machine control network
Cycle: **125μs**
EtherCAT 

Data output
High-speed interface:
USB 3.0

Intel® Core™ i7 processor

FH-5□5□
High-speed,
Large-capacity Controller

Ultra-high-speed CPU

Large-capacity RAM

4 times faster*1 than our previous models

10 times larger*1 than our previous models

*1. The FH-555□ Controller is compared with the our previous model FH-3050 Controller.


Four-core parallel processing examples

Multi-Line Random-Trigger inspects at up to four different timings

A single controller can perform inspections at different points at different timings.


Controllers installed for each process can be integrated into one, reducing initial costs and saving space.

Packaging process of pharmaceuticals

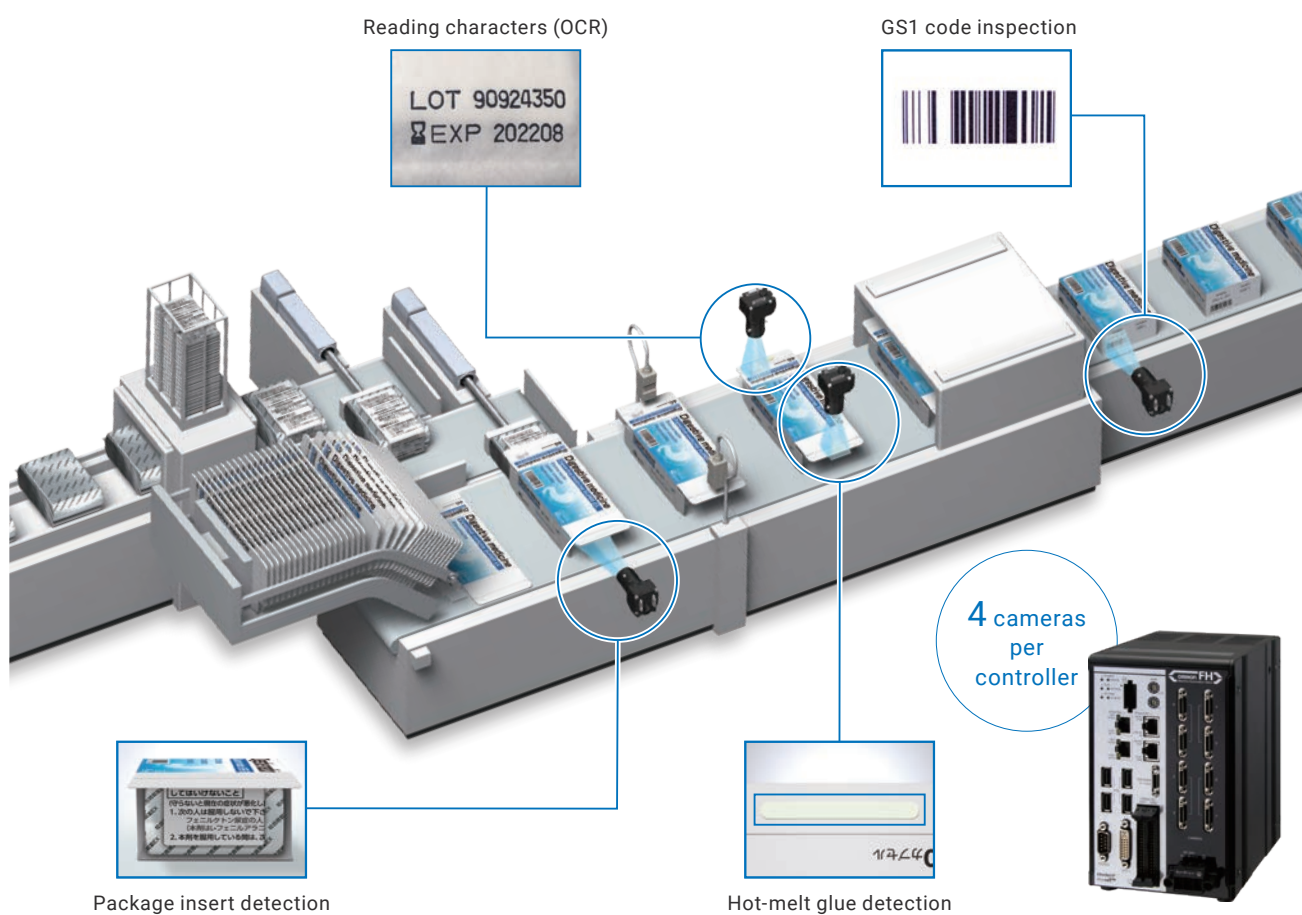

Contamination inspection of beverage containers

A single controller that can control each line saves initial costs and space.

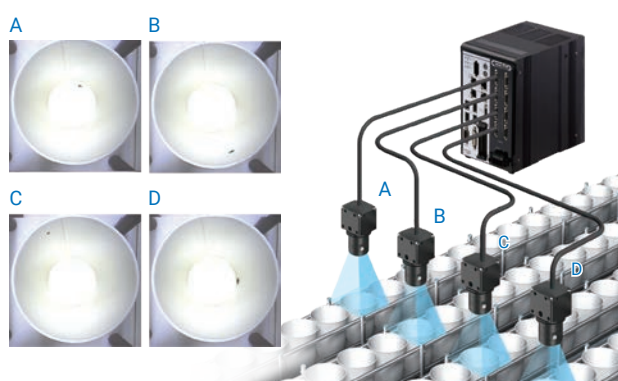

Appearance inspection of rechargeable battery cells

Four cameras can be connected to one controller, enabling simultaneous inspection of dents and scratches from four directions.



Camera and light for high-speed, high-resolution visualization

High-resolution 20.4 megapixel camera

We offer a range of cameras that can capture high-resolution images suitable for sensory inspection at high speeds.



20.4 Mpix
camera

Ultra-high-speed sensing technology in a compact design


There was a trade-off between high-resolution image capture like the human eye and inspection processing speed. We use new CMOS image elements and dual transfer technology to capture high-resolution images while transferring images at high speeds. This facilitates applications that previously required multiple cameras or a mechanism to move a camera.

MDMC light with flexible lighting patterns


This light can be adjusted to defects by combining the illumination colors and angles like humans do. Even if new objects or inspection items are added after installation, there is no need to add or change the light—just change the illumination pattern. The illumination patterns can be registered as settings, facilitating duplicating production lines.

Illumination structure

You can choose the best pattern by combining illumination directions x full color RGB x 128 brightness levels of 13 blocks.

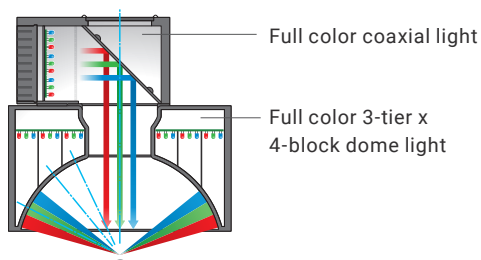



MDMC^{*1}
Light

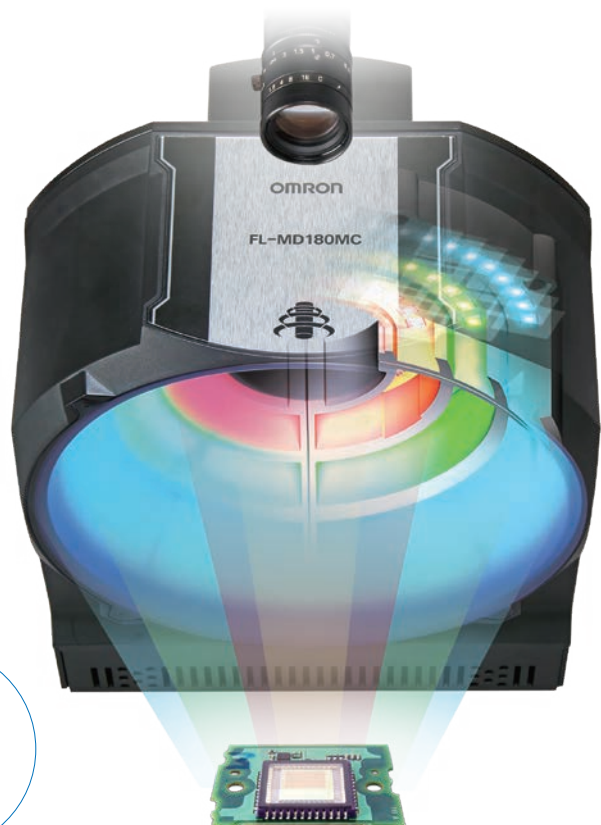

*1. MDMC...Multi-Direction Multi-Color

SWIR camera for infrared inspections

OMRON's SWIR camera has adopted a Sony image sensor (IMX990/IMX991) that enables broad-range imaging from visible light to 1,700 nm wavelength, allowing for both visible light and SWIR inspections in a single unit. It can expand the supported range of inspected objects and applications, while ultimately reducing inspection system costs and increasing the image processing speed.

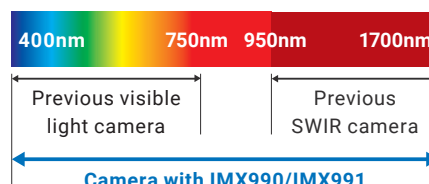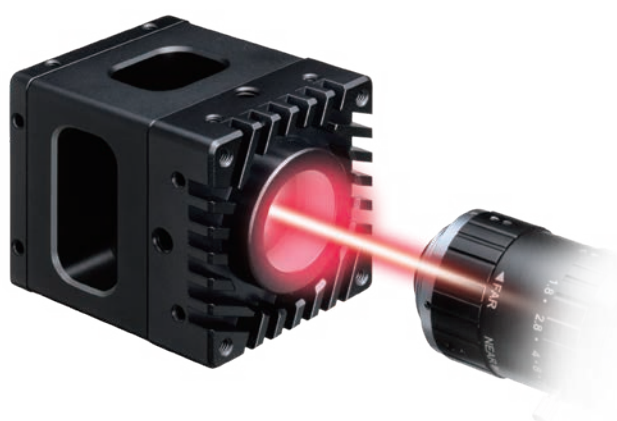

Visible light to
1,700 nm
in a single
unit

Unique heat-dissipating structure and front-reinforced heat sink

Patent Pending ^{*2}

The camera has a special heat dissipation design so that it can operate stably even with natural cooling using the heat dissipation of the individual camera without using air cooling or water cooling.

The special heat sink at the tip of the camera prevents heat from being trapped and helps to dissipate heat efficiently, and the heat dissipation block in the center of the individual has a mechanism to evenly dissipate heat from the element.

^{*2}. "Patent pending" and "Patented" refer to patent status in Japan (as of September 2025).

Examples: Inspections difficult to conduct with visible light


Aligning silicon wafers

High-precision alignment is possible with an alignment mark image captured by the camera through a wafer.

Visible light camera



SWIR camera

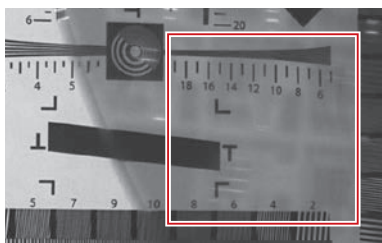

Inspecting the leakage of transparent liquid

Stable inspection is possible by visualizing transparent liquid that cannot be captured by a standard camera.


Visible light camera



SWIR camera

IR : 1450nm

Highlighting the detected leakage of transparent liquid

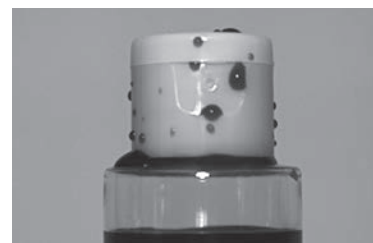

Software for flexible automation


Flexible image capture





Multi-Trigger Imaging captures long objects at high speeds

The Multi-Trigger Imaging function can capture images and process them in parallel, leveraging the speed of the multi-core processor to capture long objects at high speeds.

Conventional vision sensor



FH Series

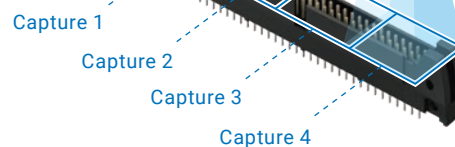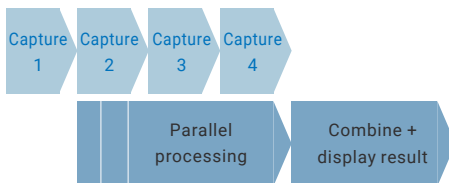


High-resolution inspections by trimming, resizing, and integrating captured images


This feature allows inspection with a high-resolution image by continuously extracting and combining images captured by an area camera, which is easier and less costly than using a line camera.

External inspection of cylindrical workpieces

The external appearance of a cylinder can be inspected all around with an image without distortions or unevenness by extracting and combining curved surface images with minimum distortions.

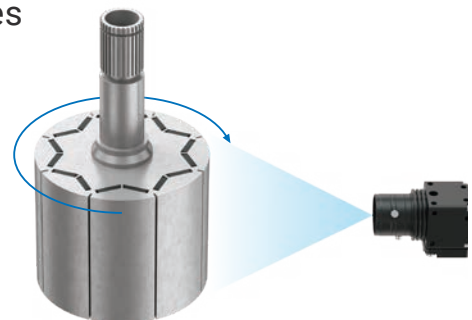


Distortion is small.

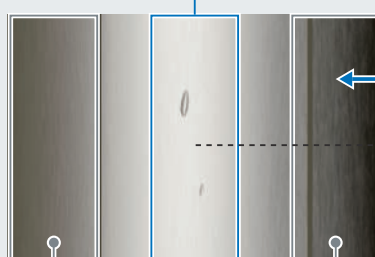

Distortion and lighting unevenness are large.

Rotating

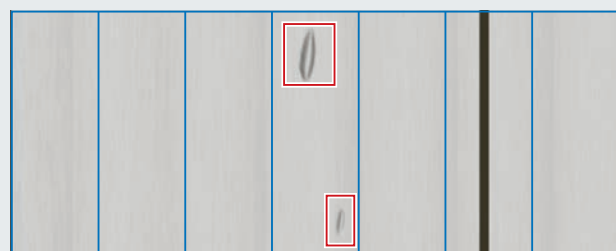

Only the area with small distortion at the center of the field of view is captured and used for integration.




Camera Image Input HDR optimizes contrast

Camera Image Input HDR helps create optimized HDR images under variable ambient conditions. Once you specify the optimum area to capture on the image, the FH Series automatically adjusts the shutter speed while capturing images and combining the images.

Adjusts brightness to suit your specified area


Optimized for the entire field of view

While the contrast around the pins is low, reduced reflection enables capturing a clear image of the entire connector.

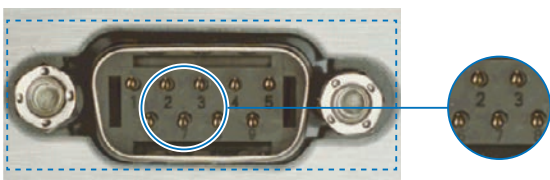


Optimized for the connector

Although reflection occurs at the surrounding part, a clear image of the pins can be captured.

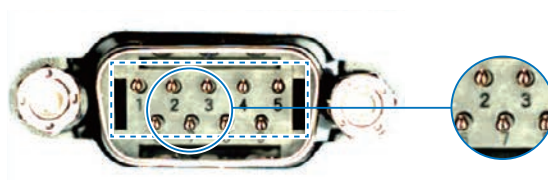


Detects low-contrast defects in high-contrast mode

Previously

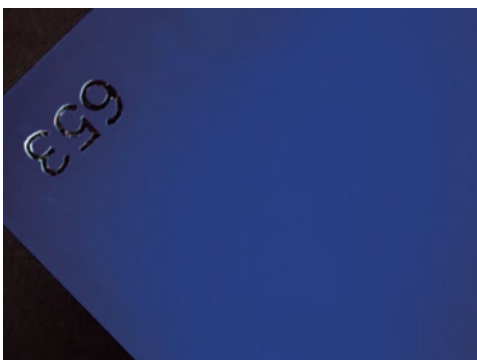

Low contrast makes the surface appear uniform.

HDR high-contrast image

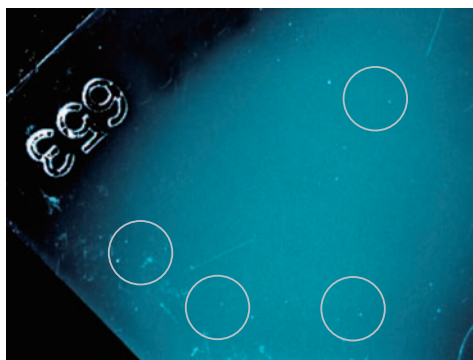


Increased contrast reveals many scratches and blemishes.

High-speed, high-precision positioning




Shape Search III is robust against shape variations

High-precision and robust positioning is possible even under the adverse conditions, such as changes in environments and materials.

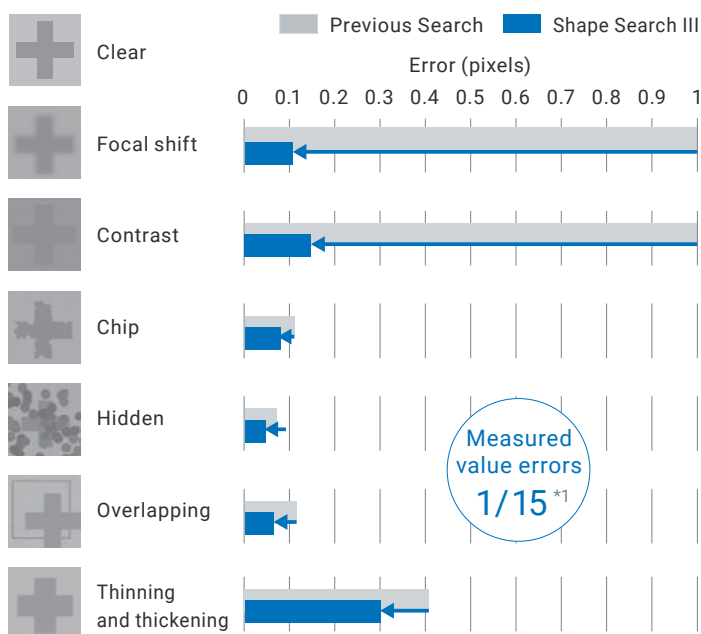

A 20.4 Mpix camera can search a positioning mark in as fast as 12 ms^{*2}, and a 5 Mpix camera, widely used for alignment applications, in as fast as 2 ms.

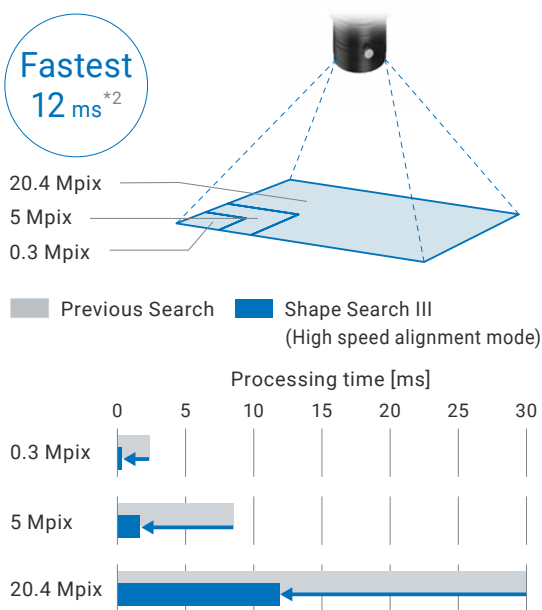


*1. The value measured under our specified conditions is provided for reference. *2. The value measured under our specified conditions is provided for reference. 20.4 Mpix camera.




Circular Scan Edge Position accurately estimates the center and radius of a circle

The new algorithm accurately detects a whole circle from a part of the circle.

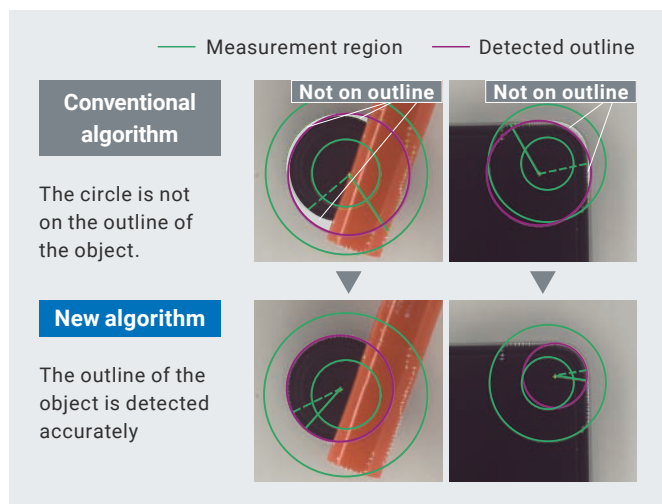

Scan Edge Position removes noise to detect edges


This algorithm accurately estimates lines even when the edges are unclear due to variations in objects or disturbance.

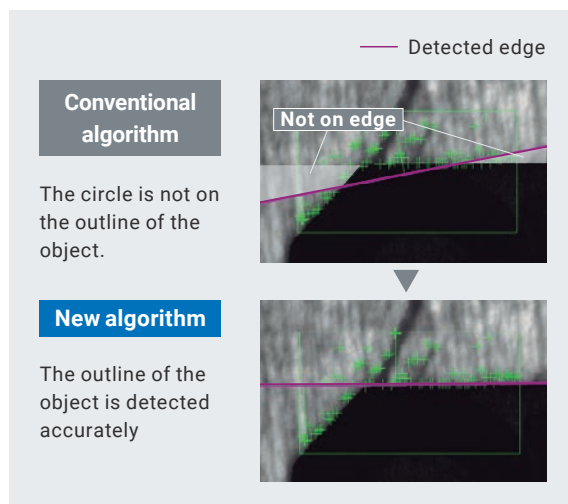



Stage Data calculates for various stages

The popular single axis + θ axis stages as well as UVW stages can be used. The use of the same axis for both handling and positioning simplifies machine configuration.

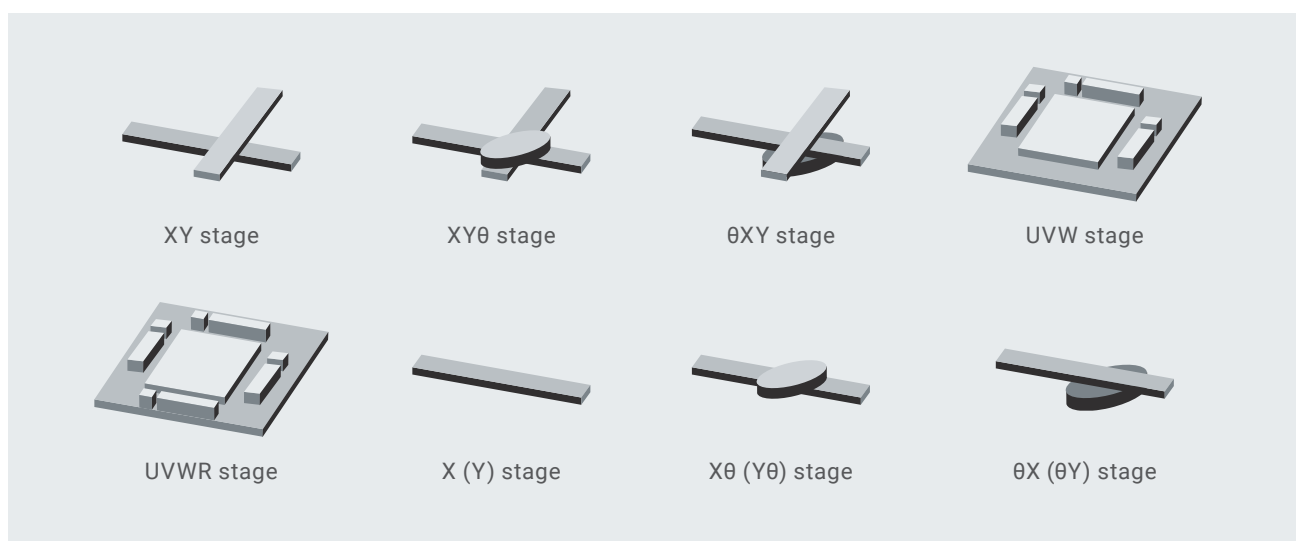


Robot Setting Tool simplifies connecting robots

Communication programs to connect robots from various vendors and FH flowcharts required for robot applications are provided free of charge. You can quickly set up robot vision applications.

Applications

Pick




Offset compensation




Place



Combination




Simple set-up steps

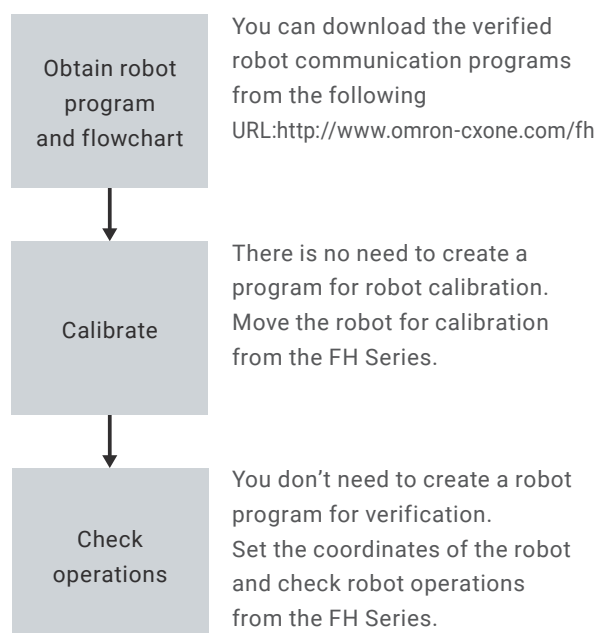

Unique identification and quality control

Unique ID associated with inspection image and result

The FH Series can associate a unique ID with the inspection image and result, and then output them to the host device. You can immediately find required inspection images and quickly identify causes of fails.

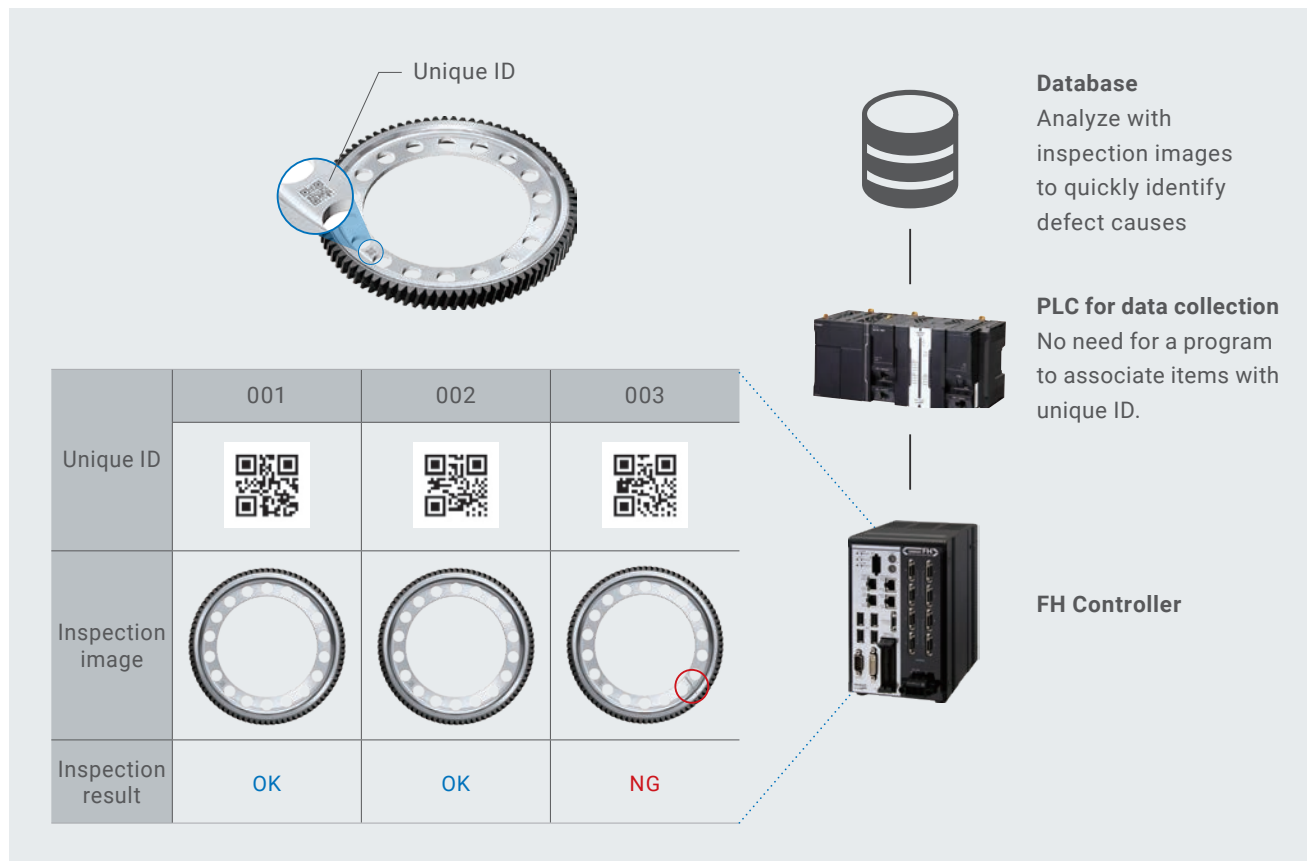


High-speed image storage

The amount of inspection image data required for defect cause analysis can be so large that conventional controllers are unable to store it given their storage time and capacity constraints.

The high-speed, large-capacity controller has USB 3.0 ports and the improved algorithm to compress image data at high speeds, enabling all images to be stored to meet increasing needs in quality control.

The times in the right figure provided for reference only and their accuracy cannot be guaranteed. They are measured under the following conditions:

- FH-5□5□ Controller
- 5 Mpix monochrome images
- Size of converted JPEG file: 0.6 MB

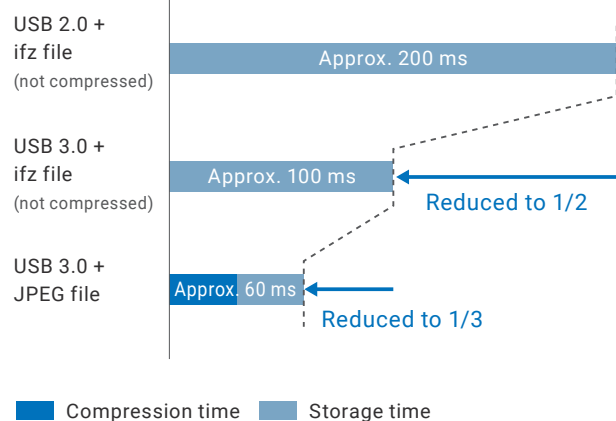




2D Code II provides powerful code reading

Recognition
rate
2times^{*1}

3times
faster^{*1}

The FH Series incorporates a dedicated algorithm for reliable and fast 2D code reading even under variable ambient brightness or adverse conditions such as after processing or washing. It also supports reading "DMRE codes", symbols created by extending the rectangle DataMatrix code symbol size.

Changing ambient
brightness




Chips due to reflection




Low contrast

Poor printing quality
in high-speed line




Variations in start
positions




Uneven line spacing

After processing or
washing




Waterdrops and oil stains



Scratched damage

Poor printing quality
on coarse surface



Molding variations of
forged object

Print Quality Grading
Function


- ISO/IEC 15415
- ISO/IEC TR29158

*1. The average value measured under our specified conditions is provided for reference.



OCR reliably reads difficult-to-read characters

OCR can reliably read characters printed too close to each other or on curved surfaces. Also plus signs can be read.




Touching characters



Curved character string
including plus sign

NEW



Curved character strings




Character Inspection reads special fonts

Character Inspection recognizes special fonts and non-alphanumeric characters based on pattern search using the dictionary set up by the user.



Special fonts




Japanese characters

Design interface for quick setup

Integrated development environment Sysmac Studio

Sysmac Studio is a unique environment that integrates logic, motion and drives, robotics, safety, visualization, and information technologies in a single project, thus reducing the learning curve and the intra-operative software costs.

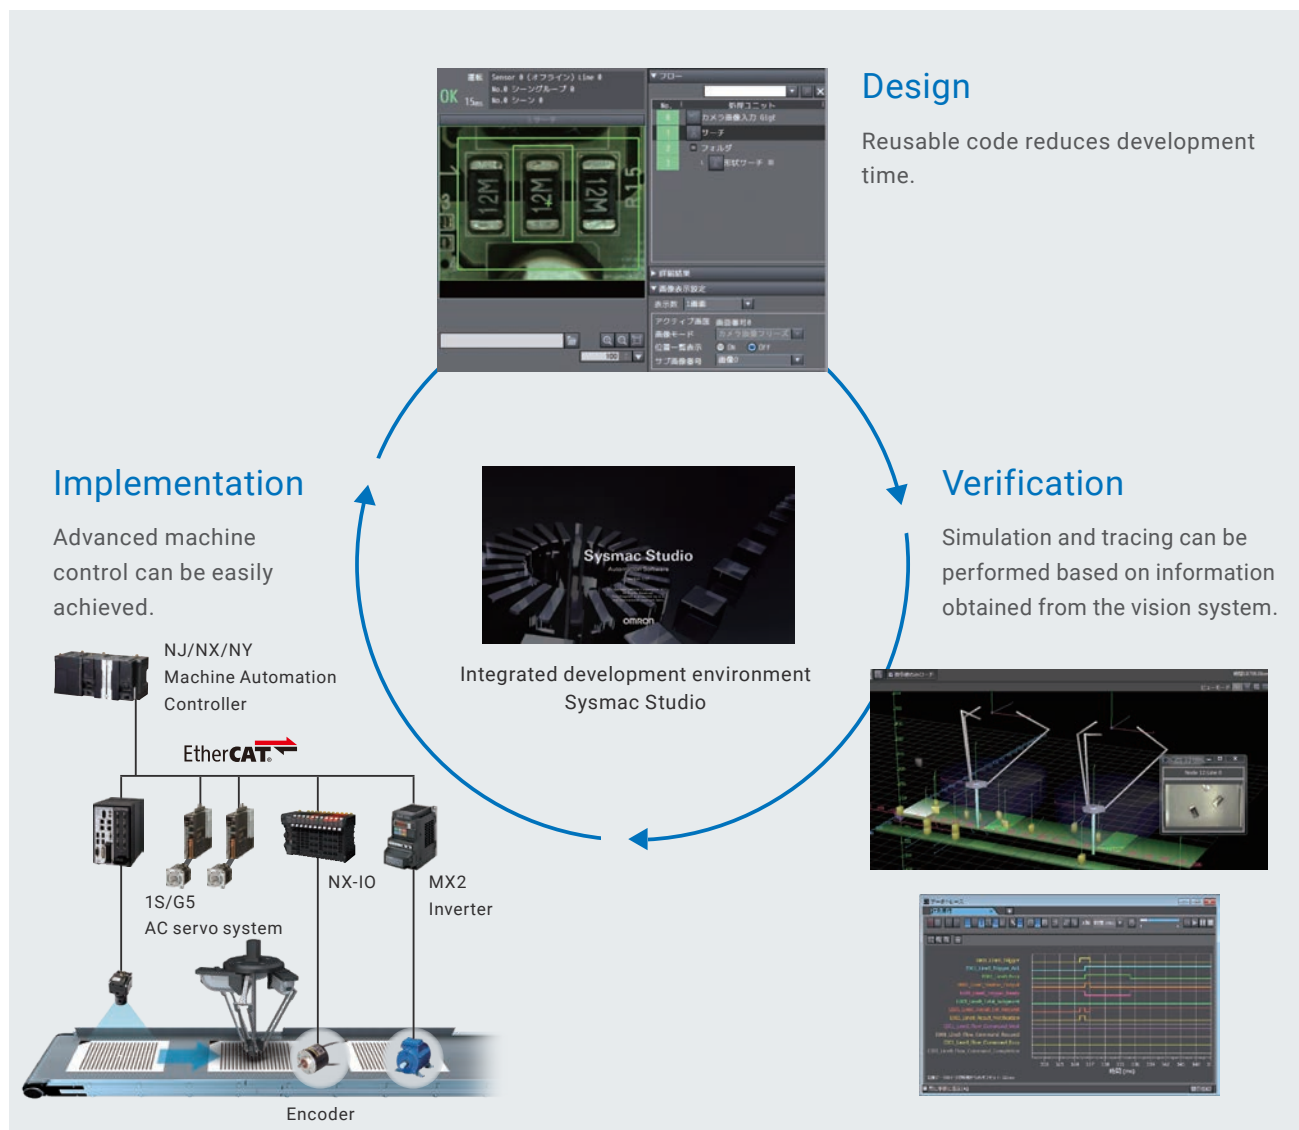


EtherCAT® for high-speed data transfer to control various devices

Data communications cycle: 125 μ s

You can use EtherCAT® to connect NJ/NX Machine Automation Controllers and 1S/G5 AC Servo System to increase the control speed of everyday communications protocols from position detection to starting axis motion.

Communications cycle



Reduced to 1/32

Time from trigger input to producing measurement results

Trigger input Measurement results



Shortened by approx. 6 ms

■ EtherCAT
■ Conventional communications standard

Note: The times given above are typical times. They depend on parameter settings.

Total Design Management Editor simplifies complex processing design


This design interface includes pre-installed screens for all phases, from design through to setting and operation. Just select processing items and determine the order to manage variables. Time-consuming calculations and inputs are no longer required.

Easy setting

All the common settings of multiple scenes can be made at once. Simplified inspection flowcharts reduce setting errors and prevent from forgetting to change settings.


Efficient setting

To inspect aligned parts, the FH Series can repeat the same measurements while shifting the measurement region within the same image. This reduces setting times.

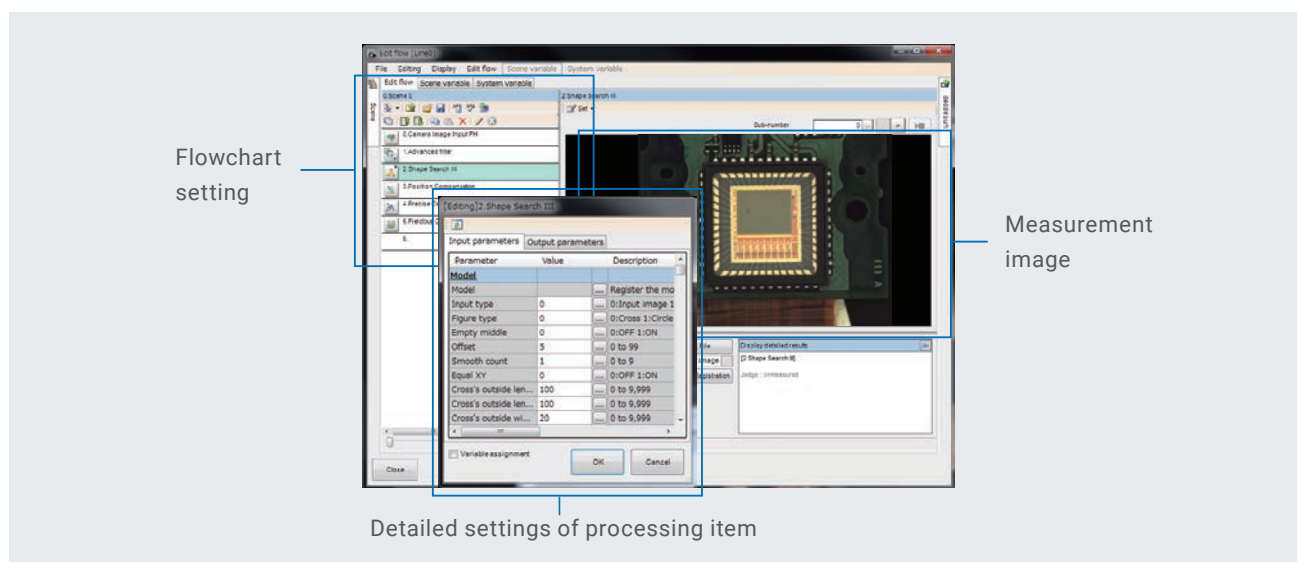

Customizable user interface simplifies operations at production sites

Showing only necessary screens for production makes the interface easier to use. Screen layout can be customized just by selecting and placing objects, without programming.

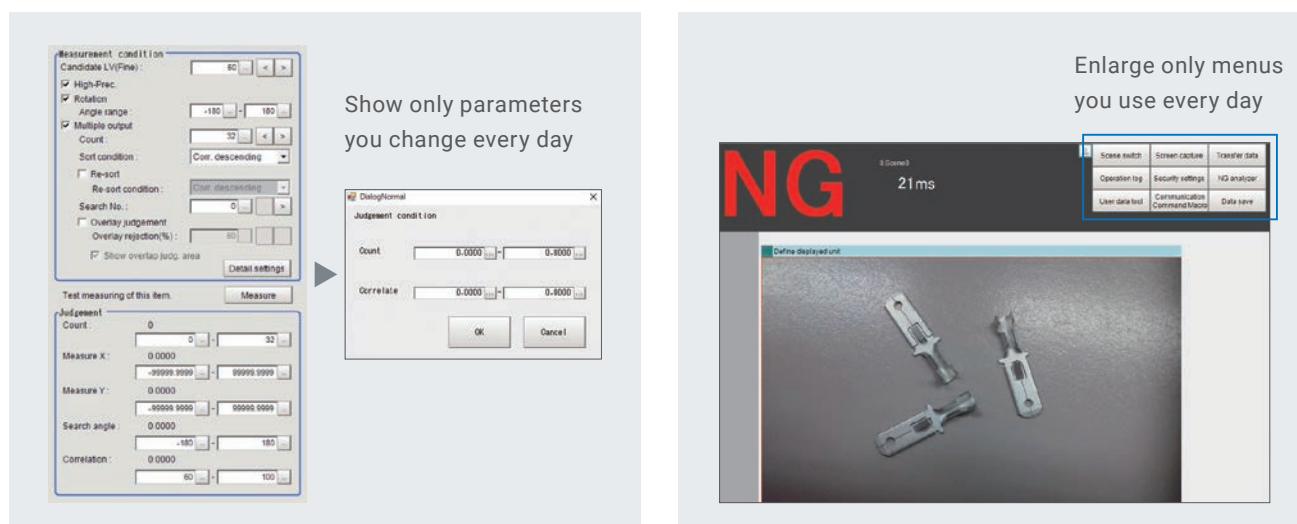

Vision System FH-Series

New AI feature makes the toughest defect inspection effortless for everyone


- Solve the three main causes of overdetection
- Build the optimal AI model with a single click
- Save maintenance effort with all-in-one solution



System configuration

EtherCAT connections for FH series

Example of the FH Sensor Controllers (4-camera type)

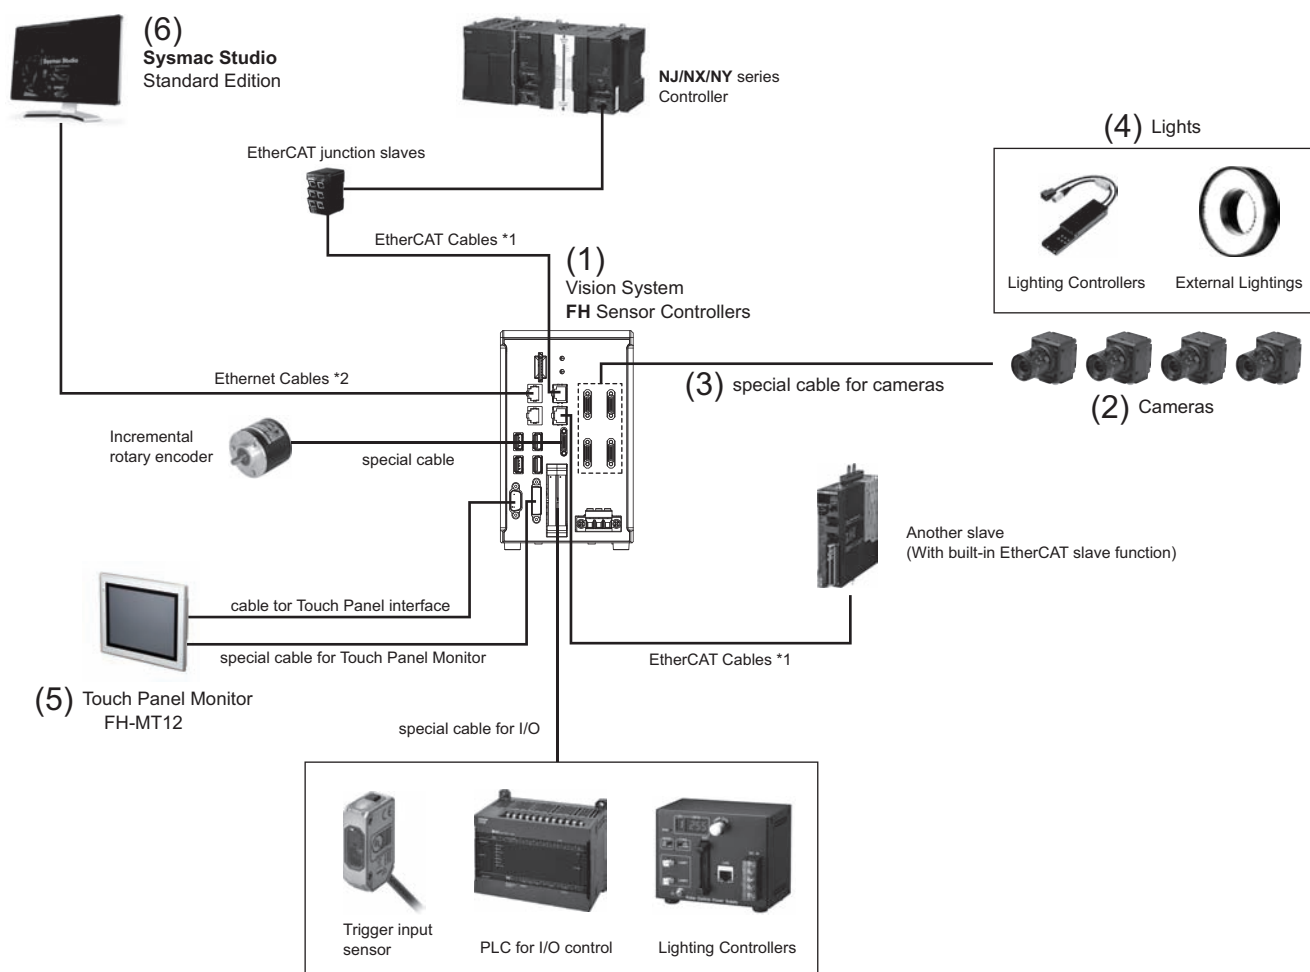

*1. To use STP (shielded twisted-pair) cable of category 5 or higher with double shielding (braiding and aluminum foil tape) for EtherCAT and RJ45 connector.

*2. To use STP (shielded twisted-pair) cable of category 5 or higher for Ethernet and RJ45 connector.



(1) Controllers

Select a controller based on the required processing speed and network.

	Series	CPU	Performance	Memory	No. of connectable cameras	Fieldbus
High-speed, Large-capacity Controller	FH-5552 Series	Intel® Core™ i7 processor 8 cores	★★★★★	RAM 32 GB, ROM 128 GB	8 max.	PROFINET, EtherNet/IP®, EtherCAT
	FH-5551 Series	Intel® Core™ i7 processor 4 cores	★★★★	RAM 32 GB, ROM 64 GB	8 max.	PROFINET, EtherNet/IP®, EtherCAT
High-speed Controller	FH-5052 Series	Intel® Core™ i7 processor 8 cores	★★★★★	RAM 8 GB, ROM 64 GB	8 max.	PROFINET, EtherNet/IP®, EtherCAT
	FH-5051 Series	Intel® Core™ i7 processor 4 cores	★★★★	RAM 8 GB, ROM 64 GB	8 max.	PROFINET, EtherNet/IP®, EtherCAT
Standard Controller	FH-2052 Series	Intel® Celeron® processor 2 cores	★★★	RAM 8 GB, ROM 64 GB	8 max.	PROFINET, EtherNet/IP®, EtherCAT
	FH-2051 Series	Intel® Celeron® processor 2 cores	★★	RAM 8 GB, ROM 64 GB	8 max.	PROFINET, EtherNet/IP®, EtherCAT
Lite Controller	FH-L551 Series	Intel® Atom® processor 2 cores	★	RAM 4 GB, ROM 32 GB	4 max.	PROFINET, EtherNet/IP®

★: The more stars, the higher the performance.

Optional Products Application Software (Sold Separately)	Model
AI Defect Inspection Software Installer*1	FH-UMLIC-08

*1. This product can be installed on the FH-5552(-□□)/FH-5551(-□□) Controller.

(2) Cameras

Choose the right camera to suit your required number of pixels.

Easy-to-use cameras with built-in light are also available.



No. of pixels	High-speed camera	Standard camera	Rolling shutter camera	High-speed small cameras	Camera with built-in light
20.4 Mpix*	---	---	FH-S□21R	---	---
12 Mpix	FH-S□X12	---	---	---	---
6 Mpix	---	---	FH-S□06R	---	---
5 Mpix	FH-S□X05	FZ-S□5M3	---	---	---
4 Mpix	FH-S□04	---	---	---	---
3.2 Mpix	FH-S□X03	---	---	---	---
2 Mpix	FH-S□02 FH-S□X02	FZ-S□2M	---	---	---
1.6 Mpix	FH-S□X01	---	---	FH-S□X01-SF□	---
0.4 Mpix/0.3 Mpix	FH-S□X	FZ-S□	---	---	FZ-SQ□□□□

* 20.4 Mpix Cameras can be used with the FH-505□/205□-series High-speed, Large-capacity Controllers.

(3) Camera cables

The cable line-up includes bend-resistant cables and right-angle cables. Use the FZ-VSJ Cable Extension Unit for cable extensions.



Description	Model
Camera Cable	FZ-VS□ □□M
Bend-resistant Camera Cable	FZ-VSB3 □□M
Super-bend-resistant Camera Cable	FZ-VSBX □□M
Right-angle Camera Cable	FZ-VSL□ □□M
Bend-resistant Right-angle Camera Cable	FZ-VSLB3 □□M
Cable Extension Unit	FZ-VSJ

(5) Touch panel monitor

The touch panel monitor is optimized for the operation of the FH Series.



Description	Model
Touch Panel Monitor 12.1 inches	FH-MT12
DVI-Analog Conversion Cable for Touch Panel Monitor	FH-VMDA □□
USB Cable for Touch Panel Monitor	FH-VUAB □□

* RS-232C cables for long-distance connections are also available. Refer to Ordering Information for details.

(6) Sysmac Studio

The development environment for Sysmac platform. Enables EtherCAT communication settings for the FH Series from a PC.

For details, refer to *Sysmac Studio Catalog* (Cat. No. P138).



(4) Lights

Omron offers a complete line-up of lights required for image processing. The use of the camera-mount lighting controller allows you to control lighting conditions from the FH Controller, making system configuration simple.



External lighting controller

Description	LED	High-brightness LED
Camera-mount Lighting Controller	FLV-TCC	FL-TCC
Bar Light	FLV-BR	FL-BR
Direct Ring Light	FLV-DR	FL-DR
Low Angle Ring Light	FLV-DL	---
Coaxial Light	FLV-CL	---
Shadowless Light	FLV-FR/FP/FS/FQ	---
Spot Light	FLV-EP	---
Direct Back/Edge Type Light	FLV-DB/FB	---
Dome Light	FLV-DD	---
Photometric Stereo Light *	---	FL-PS

* The FL-TCC Camera-mount Lighting Controller cannot be used. Use the FL-TCC1PS Lighting Controller for Photometric Stereo Light.

Built-in lighting controller

Description	Model
MDMC Light	FL-MD

Refer to the *Vision Accessory Catalog* (Cat. No. Q198) for details.

(7) Application producer

This development environment enables you to customize FH functions. It includes sample codes and wizards that will help you develop your own interfaces and processing items.



Description	Model
DVD for installation	FH-AP1
Software license	FH-AP1L

FH-Series

Ordering Information

FH Series Sensor Controllers

Item	CPU	AI function		Memory	No. of cameras	Output	Model *3
		AI Defect Inspection *1	AI FineMatching				
	High-speed, Large-capacity Controller	Intel® Core™ i7 processor 8 cores (new generation)	Available	RAM 32 GB, ROM 128 GB	2	NPN/PNP	FH-5552
					4	NPN/PNP	FH-5552-10
					8	NPN/PNP	FH-5552-20
		Intel® Core™ i7 processor 4 cores	Available	RAM 32 GB, ROM 64 GB	2	NPN/PNP	FH-5551
					4	NPN/PNP	FH-5551-10
					8	NPN/PNP	FH-5551-20
	High-speed Controller	Intel® Core™ i7 processor 8 cores (new generation)	Not available	RAM 8 GB, ROM 64 GB	2	NPN/PNP	FH-5052
					4	NPN/PNP	FH-5052-10
					8	NPN/PNP	FH-5052-20
		Intel® Core™ i7 processor 4 cores	Not available	RAM 8 GB, ROM 64 GB	2	NPN/PNP	FH-5051
					4	NPN/PNP	FH-5051-10
					8	NPN/PNP	FH-5051-20
	Standard Controller	Intel® Celeron® processor 2 cores (new generation)	Not available	RAM 8 GB, ROM 64 GB	2	NPN/PNP	FH-2052
					4	NPN/PNP	FH-2052-10
					8	NPN/PNP	FH-2052-20
		Intel® Celeron® processor 2 cores	Not available	RAM 8 GB, ROM 64 GB	2	NPN/PNP	FH-2051
					4	NPN/PNP	FH-2051-10
					8	NPN/PNP	FH-2051-20
	Lite Controller	Intel® Atom® processor 2 cores	Not available	RAM 4 GB, ROM 32 GB	2	NPN/PNP	FH-L551
					4	NPN/PNP	FH-L551-10

*1 Optional FH-UMLIC-08 AI Defect Inspection Software Installer is required.

*2 Use in conjunction with 0.3 or 0.4 million-pixel cameras.

*3 The FH-5□52/-5□51/-2052/-2051/-L551 Series will be discontinued. For more information about the replacement models FH-5□53/-2053/-L552, please contact your OMRON sales representative.

Optional Products Application Software (Sold Separately)

Item	Model
AI Defect Inspection Software Installer *1	FH-UMLIC-08
AI Defect Inspection Simulator License	FH-UDLIC-SIM

*1 This product can be installed on the FH-5552(-□□)/FH-5551(-□□) Controller.

Cameras

Item	Lens mount	Descriptions	Color / Monochrome	Image Acquisition Time *1	Model
 	Digital CMOS Cameras (Lens required)	C mount	20.4 million pixels (Supported controller: FH-5□5□(-□)/205□(-□) Series) *2	Color Monochrome	42.6 ms *3 FH-SC21R FH-SM21R
	High-speed Digital CMOS Cameras (Lens required)	C mount	12 million pixels *2	Color Monochrome	24.9 ms *3 FH-SCX12 FH-SMX12
			5 million pixels	Color Monochrome	10.3 ms *3 FH-SCX05 FH-SMX05
			3.2 million pixels	Color Monochrome	6.6 ms *3 FH-SCX03 FH-SMX03
			2 million pixels	Color Monochrome	11.1 ms *3 FH-SCX02 FH-SMX02
			1.6 million pixels	Color Monochrome	6.5 ms *3 FH-SCX01 FH-SMX01
			0.4 million pixels	Color Monochrome	1.9ms *3 FH-SCX FH-SMX
	High-speed Digital CMOS Cameras (Lens required)	M42 mount	12 million pixels *2	Color Monochrome	25.7 ms *3 FH-SC12 FH-SM12
	High-speed Digital CMOS Cameras (Lens required)	C mount	4 million pixels	Color Monochrome	8.5 ms *3 FH-SC04 FH-SM04
			2 million pixels	Color Monochrome	4.6 ms *3 FH-SC02 FH-SM02
			0.3 million pixels	Monochrome	3.3 ms FH-SM *8
	Digital CMOS Cameras (Lens required)	C mount	5 million pixels	Color Monochrome	38.2 ms FZ-SC5M3 FZ-S5M3
	Digital CMOS Cameras (Lens required)	C mount	6 million pixels	Color Monochrome	29.3 ms *3 FH-SC06R FH-SM06R
	Digital CCD Cameras (Lens required)	C mount	2 million pixels	Color Monochrome	33.3 ms FZ-SC2M FZ-S2M
			0.3 million pixels	Color Monochrome	12.5 ms FZ-SC FZ-S

Application Cameras

Item	Lens mount	Descriptions	Color / Monochrome	Image Acquisition Time *1	Model
	C mount	1.31 million pixels	Monochrome	8.3 ms	FH-SMX01-SWIR *7
		0.33 million pixels	Monochrome	4.2 ms	FH-SMX-SWIR *7
	S mount	1.6 megapixels straight type	Color Monochrome	6.5 ms *3	FH-SCX01-SFS FH-SMX01-SFS
		1.6 megapixels rightangle type	Color Monochrome		FH-SCX01-SFL FH-SMX01-SFL
	Built-in lens	Narrow view	Color	16.7 ms	FZ-SQ010F
		Standard view	Color		FZ-SQ050F
		Wide View (long-distance)	Color		FZ-SQ100F
		Wide View (short-distance)	Color		FZ-SQ100N

*1 The image acquisition time does not include the image conversion processing time of the sensor controller.

The camera image input time varies depending on the sensor controller model, number of cameras, and camera settings. Check before you use the camera.

*2 Up to four cameras of this model can be connected to one controller. Up to eight cameras including other models can be connected to an FH-□□□□-20.

*3 Frame rate in high speed mode when the camera is connected. For other conditions, refer to the *Camera Image Capture Time by Operating Condition* table on the following page.

Camera Image Capture Time by Operating Condition

Model			FH-S□02	FH-S□04	FH-S□12	FH-S□X	FH-S□X01	FH-S□X02
Image Acquisition Time *4	2 Cables *5	High Speed Mode *6	4.6 ms	8.5 ms	25.7 ms	---	---	---
		Standard Mode	9.7 ms	17.9 ms	51.3 ms	---	---	---
	1 Cables	High Speed Mode *6	9.2 ms	17.0 ms	51.3 ms	1.9 ms	6.5 ms	11.1 ms
		Standard Mode	19.3 ms	35.8 ms	102.0 ms	3.8 ms	14.7 ms	18.9 ms

Model			FH-S□X03	FH-S□X05	FH-S□X12	FH-S□06R	FH-S□21R	FH-S□X01-SFL FH-S□X01-SFS
Image Acquisition Time *4	2 Cables *5	High Speed Mode *6	6.6 ms	10.3 ms	24.9 ms	---	42.6 ms	---
		Standard Mode	14.1 ms	22.1 ms	53.5 ms	---	90.1 ms	---
	1 Cables	High Speed Mode *6	13.2 ms	20.6 ms	50.0 ms	29.3 ms	83.3 ms	6.5 ms
		Standard Mode	28.2 ms	44.1 ms	106.4 ms	52.9 ms	175.4 ms	14.7 ms

*4 The image acquisition time does not include the image conversion processing time of the sensor controller.

*5 Two Camera ports of the controller are used per one camera.

*6 Up to 5 m Camera Cable length.

*7 These cannot be connected to the old controller FH-5□50/2050/L550 series not listed in this catalog.

Export and Trade Control Laws

This product is classed as a commodity (or technology) requiring acquisition of export permission in accordance with foreign exchange and overseas trade control laws.

When this product is to be taken outside of Japan, adopt the required procedures such as application for export permission by the Japanese government.

When this product is to be taken outside of countries after imported from Japan, please confirm export and trade control laws of country and adopt the required procedures.

*8 FH-SM will be discontinued at the end of March 2027.

Camera Cables

Item	Descriptions	Model *3
	Camera Cable Cable length: 2 m, 3 m, 5 m, or 10 m *2	FZ-VS3 □M
	Bend resistant Camera Cable Cable length: 2 m, 3 m, 5 m, or 10 m *2	FZ-VSB3 □M
	Super Bend resistant Camera Cable Cable length: 5 m or 10 m	FZ-VSBX □M
	Right-angle Camera Cable *1 Cable length: 2 m, 3 m, 5 m, or 10 m *2	FZ-VSL3 □M
	Bend resistant Right-angle Camera Cable *1 Cable length: 2 m, 3 m, 5 m, or 10 m *2	FZ-VSLB3 □M
	Long-distance Camera Cable Cable length: 15 m *2	FZ-VS4 15M
	Long-distance Right-angle Camera Cable *1 Cable length: 15 m *2	FZ-VSL4 15M
	Cable Extension Unit Up to two Extension Units and three Cables can be connected. (Maximum cable length: 45 m *2)	FZ-VSJ

*1 This Cable has an L-shaped connector on the Camera end.

*2 The maximum cable length depends on the camera being connected, and the model and length of the cable being used. For further information, refer to the *Cameras / Cables Connection Table and Maximum Extension Length Using Cable Extension Units FZ-VSJ* table.

When a High-speed Digital CMOS Camera FH-S□02/-S□04/-S□12/-S□X03/-S□X05/-S□X12/-S□21R is used in the high speed mode of transmission speed, two camera cables are required.

*3 Insert the cables length into □ in the model number as follows. 2 m = 2, 3 m = 3, 5 m = 5, 10 m = 10

Cameras / Cables Connection Table

Name	Model	Length	FH-SM/FH-SC	FH-S□02, FH-S□04, FH-S□12, FH-S□06R, FH-S□X, FH-S□X01, FH-S□X02, FH-S□X03, FH-S□X05, FH-S□X12, FH-S□21R, FH-S□X01-SFL, FH-S□X01-SFS	
				High speed	Standard
Camera cable Right-angle Camera cable	FZ-VS3 FZ-VSL3	2 m	Yes	Yes	Yes
		3 m	Yes	Yes	Yes
		5 m	Yes	Yes	Yes
		10 m	Yes	---	Yes
Bend resistant Camera cable Bend resistant Right-angle Camera cable	FZ-VSB3 FZ-VSLB3	2 m	Yes	Yes	Yes
		3 m	Yes	Yes	Yes
		5 m	Yes	Yes	Yes
		10 m	Yes	---	Yes
Super bend resistant Camera cable	FZ-VSBX	5 m	Yes	Yes	Yes
		10 m	Yes	---	Yes
Long-distance Camera cable Long-distance Right-angle Camera cable	FZ-VS4 FZ-VSL4	15 m	Yes	---	Yes

Name	Model	Length	FH-SMX-SWIR/FH-SMX01-SWIR	
Camera cable Right-angle Camera cable	FZ-VS3 FZ-VSL3	2 m	Yes	
		3 m	Yes	
		5 m	Yes	
		10 m	---	
Bend resistant Camera cable Bend resistant Right-angle Camera cable	FZ-VSB3 FZ-VSLB3	2 m	Yes	
		3 m	Yes	
		5 m	Yes	
		10 m	---	
Super bend resistant Camera cable	FZ-VSBX	5 m	Yes	
		10 m	---	
Long-distance Camera cable Long-distance Right-angle Camera cable	FZ-VS4 FZ-VSL4	15 m	---	

Name	Model	Length	FZ-S/FZ-SC, FZ-S2M/FZ-SC2M, FZ-SQ□	FZ-S5M3/FZ-SC5M3
Camera cable Right-angle Camera cable	FZ-VS3 FZ-VSL3	2 m	Yes	Yes
		3 m	Yes	Yes
		5 m	Yes	Yes
		10 m	Yes	---
Bend resistant Camera cable Bend resistant Right-angle Camera cable	FZ-VSB3 FZ-VSLB3	2 m	Yes	Yes
		3 m	Yes	Yes
		5 m	Yes	Yes
		10 m	Yes	---
Super bend resistant Camera cable	FZ-VSBX	5 m	Yes	Yes
		10 m	Yes	---
Long-distance Camera cable Long-distance Right-angle Camera cable	FZ-VS4 FZ-VSL4	15 m	Yes	---

Maximum Extension Length Using Cable Extension Units FZ-VSJ

Model	Transmission speed *1	No. of CH used for connection *2	Maximum cable length using 1 Camera Cable *1	Max. number of connectable Extension Units	Using Cable Extension Units FZ-VSJ	
					Max. cable length	Connection configuration
FH-SM/FH-SC FZ-S/FZ-SC FZ-S2M/FZ-SC2M FZ-SQ□	---	---	15 m (Using FZ-VS4/VSL4)	2	45 m	[Configuration 1] Camera cable: 15 m × 3 Extension Unit: 2
FH-S□X FH-S□X01 FH-S□X02 FH-S□06R FH-S□X01-SFL FH-S□X01-SFS	Standard	---	15 m (Using FZ-VS4/VSL4)	2	45 m	[Configuration 1] Camera cable: 15 m × 3 Extension Unit: 2
	High speed	---	5 m (Using FZ-VS□/VSL□)	2	15 m	[Configuration 3] Camera cable: 5 m × 3 Extension Unit: 2
FH-S□02 FH-S□04 FH-S□12 FH-S□X03 FH-S□X05 FH-S□X12 FH-S□21R	Standard	1 CH	15 m (Using FZ-VS4/VSL4)	2	45 m	[Configuration 1] Camera cable: 15 m × 3 Extension Unit: 2
		2 CH	15 m (Using FZ-VS4/VSL4)	4 *3	45 m	[Configuration 2] Camera cable: 15 m × 6 Extension Unit: 4
	High speed	1 CH	5 m (Using FZ-VS□/VSL□)	2	15 m	[Configuration 3] Camera cable: 5 m × 3 Extension Unit: 2
		2 CH	5 m (Using FZ-VS□/VSL□)	4 *3	15 m	[Configuration 4] Camera cable: 5 m × 6 Extension Unit: 4
FZ-S5M3/FZSC5M3 FH-SMX-SWIR/ FHSMX01-SWIR	---	---	5 m (Using FZ-VS□/VSL□)	2	15 m	[Configuration 3] Camera cable: 15 m × 3 Extension Unit: 2

*1 The FH-S□□□ enables switching between standard and high speed modes. In high speed mode, images can be transferred approximately two times faster than in standard mode, but the connectable cable length will be shorter.

*2 The FH-S□□□ has two channels to connect Camera Cables. Connection to two channels makes image transfer two times faster than connection to one channel: high speed mode using two channels can transfer approximately four times as many images as standard mode using one channel.

*3 Each channel can be used to connect up to two Cable Extension Units: up to four extension units, two channels x two units, can be connected by using two channels.

Connection Configuration

	Connection configuration using the maximum length of Camera Cables	Remarks
Configuration 1		
Configuration 2		 Camera cable connector CH2 Camera cable connector CH1
Configuration 3		
Configuration 4		 Camera cable connector CH2 Camera cable connector CH1

*4 Select the Camera Cables between the Controller and Extension Unit, between the Extension Units, and between the Extension Unit and Camera according to the connected Camera.
Different types or lengths of Camera Cables can be used for (1), (2), and (3) as well as for (4), (5), and (6). However, the type and length of Camera Cable (1) must be the same as those of Camera Cable (4), (2) must be the same as (5), and (3) must be the same as (6).

Monitor

Item	Descriptions	Model
	Touch Panel Monitor 12.1 inches For FH Sensor Controllers *	FH-MT12
	LCD Monitor 8.4 inches	FZ-M08

* FH Series Sensor Controllers version 5.32 or higher is required.

Monitor Cables

Item	Descriptions	Model
	DVI-Analog Conversion Cable for Touch Panel Monitor/LCD Monitor Cable length: 2 m, 5 m or 10 m	FH-VMDA □M *1
	RS-232C Cable for Touch Panel Monitor Cable length: 2 m, 5 m or 10 m	XW2Z-□□□PP-1 *2
	USB Cable for Touch Panel Monitor Cable length: 2 m or 5 m	FH-VUAB □M *1

*1 Insert the cables length into □ in the model number as follows. 2 m = 2, 5 m = 5, 10 m = 10

*2 Insert the cables length into □□□ in the model number as follows. 2 m = 200, 5 m = 500, 10 m = 010.

A video signal cable and an operation signal cable are required to connect the Touch Panel Monitor.

Signal	Cable	2 m	5 m	10 m
Video signal	DVI-Analog Conversion Cable	Yes	Yes	Yes
Touch panel operation signal	USB Cable	Yes	Yes	No
	RS-232C Cable	Yes	Yes	Yes

Parallel I/O Cables/Encoder Cable

Item	Descriptions	Model
	Parallel I/O Cable *1 Cable length: 2m, 5m or 15m	XW2Z-S013-□ *2
	Parallel I/O Cable for Connector-terminal Conversion Unit *1 Cable length: 0.5 m, 1 m, 1.5 m, 2 m, 3 m, 5 m Connector-Terminal Block Conversion Units can be connected (Terminal Blocks Recommended Products: OMRON XW2K-34G-T)	XW2Z-□□□EE *3
	Ultra-Compact Interface Wiring System (General-Purpose)	XW2K-34G-T *4
	Encoder Cable for line-driver Cable length: 1.5 m	FH-VR 1.5M

*1 2 Cables are required for all I/O signals.

*2 Insert the cables length into □ in the model number as follows. 2 m = 2, 5 m = 5, 15 m = 15

*3 Insert the cables length into □□□ in the model number as follows. 0.5 m = 050, 1 m = 100, 1.5 m = 150, 2 m = 200, 3 m = 300, 5 m = 500

*4 Refer to the XW2K Series Datasheet (Cat. No. G152) for details.

Parallel Converter Cable

When you change to connect the F series, FZ5 series, or FZ5-L series to FH series Sensor Controller, you can convert by using the appropriate parallel converter cable of FH-VPX series under the usable condition.

Item	Applicable Model		Usable Condition	Model
	FZ□ series		- Do not use RESET signal. * - Use with COMIN and COMUT are same power source.	FH-VPX-FZ
	FZ□-L35x series		Do not use RESET signal. *	FH-VPX-FZL
	F160 series	F160-C10	- Do not use RESET signal. * - Use with COMIN and COMOUT are same power source. - Do not use DI5 and DI6.	FH-VPX-F160
	F210 series	F210-C10	- Do not use RESET signal. * - Use with COMIN and COMOUT are same power source. - Do not use DI8 and DI9.	FH-VPX-F210
		F210-C10-ETN		
	F500 series	F500-C10		

* Even if RESET signal cannot be use by conversion, conversion is possible to convert satisfying other usable condition.

Note: Cannot be used for the F160-C10CP/-C10CF.

Recommended EtherCAT and EtherNet/IP Communications Cables

Use Straight STP (shielded twisted-pair) cable of category 5 or higher with double shielding (braiding and aluminum foil tape) for EtherCAT.

Use Straight or cross STP (shielded twisted-pair) cable of category 5 or higher for EtherNet/IP.

Cable with Connectors

Item	Appearance	Recommended manufacturer	Cable length (m)	Model
Cable with Connectors on Both Ends (RJ45/RJ45) Standard RJ45 plugs type *1 Wire Gauge and Number of Pairs: AWG26, 4-pair Cable Cable Sheath material: PUR Cable color: Yellow *2		OMRON	0.3	XS6W-6PUR8SS30CM-YF
			0.5	XS6W-6PUR8SS50CM-YF
			1	XS6W-6PUR8SS100CM-YF
			2	XS6W-6PUR8SS200CM-YF
			3	XS6W-6PUR8SS300CM-YF
			5	XS6W-6PUR8SS500CM-YF
Cable with Connectors on Both Ends (RJ45/RJ45) Rugged RJ45 plugs type *1 Wire Gauge and Number of Pairs: AWG22, 2-pair Cable Cable color: Light blue		OMRON	0.3	XS5W-T421-AMD-K
			0.5	XS5W-T421-BMD-K
			1	XS5W-T421-CMD-K
			2	XS5W-T421-DMD-K
			5	XS5W-T421-GMD-K
			10	XS5W-T421-JMD-K
Cable with Connectors on Both Ends (M12 Straight/M12 Straight) Shield Strengthening Connector cable *3 M12/Smartclick Connectors Wire Gauge and Number of Pairs: AWG22, 2-pair Cable Cable color: Black		OMRON	0.5	XS5W-T421-BM2-SS
			1	XS5W-T421-CM2-SS
			2	XS5W-T421-DM2-SS
			3	XS5W-T421-EM2-SS
			5	XS5W-T421-GM2-SS
			10	XS5W-T421-JM2-SS
Cable with Connectors on Both Ends (M12 Straight/RJ45) Shield Strengthening Connector cable *3 M12/Smartclick Connectors Rugged RJ45 plugs type Wire Gauge and Number of Pairs: AWG22, 2-pair Cable Cable color: Black		OMRON	0.5	XS5W-T421-BMC-SS
			1	XS5W-T421-CMC-SS
			2	XS5W-T421-DMC-SS
			3	XS5W-T421-EMC-SS
			5	XS5W-T421-GMC-SS
			10	XS5W-T421-JMC-SS

*1 Cables with standard RJ45 plugs are available in the following lengths: 0.2 m, 0.3 m, 0.5 m, 1 m, 1.5 m, 2 m, 3 m, 5 m, 7.5 m, 10 m, 15 m, 20 m. Cables with rugged RJ45 plugs are available in the following lengths: 0.3 m, 0.5 m, 1 m, 2 m, 3 m, 5 m, 10 m, 15 m.

For details, refer to the Industrial Ethernet Connectors Catalog (Cat. No. G019).

*2 Cables colors are available in yellow, green, and blue.

*3 For details, contact your OMRON representative.

Cables / Connectors

Item	Recommended manufacturer	Model
Products for EtherCAT or EtherNet/IP (1000BASE-T/100BASE-TX) Wire gauge and number of pairs: AWG24, 4-pair cable	Cable	Kuramo Electric Co. KETH-SB *1
	RJ45 Connector	Panduit Corporation MPS588-C *1
Products for EtherCAT or EtherNet/IP (100BASE-TX/10BASE-T) Wire gauge and number of pairs: AWG22, 2-pair cable	Cable	Kuramo Electric Co. KETH-PSB-OMR *2
	RJ45 Assembly Connector 	JMACS Japan Co., Ltd. PNET/B *2 OMRON XS6G-T421-1 *2

*1 We recommend you to use the above Cable and RJ45 Connector together.

*2 We recommend you to use the above Cable and RJ45 Assembly Connector together.

Automation Software Sysmac Studio

The Sysmac Studio is the software that provides an integrated environment for setting, programming, debugging and maintenance of machine automation controllers including the NJ/NX-series CPU Units, NY-series Industrial PC, EtherCAT Slave, and the HMI.

For details, refer to your local OMRON website and *Sysmac Studio Catalog* (Cat. No. P138).

Development Environment

Please purchase a CD-ROM and licenses the first time you purchase the Application Producer. CD-ROMs and licenses are available individually. The license does not include the CD-ROM.

Product	Specifications	Number of Model Standards licenses	Media	Model
Application Producer	Software components that provide a development environment to further customize the standard controller features of the FH Series. System requirements: CPU: Intel Pentium Processor (SSE2 or higher) OS: Windows 10 (32/64bit) Windows 11 .NET Framework: .NET Framework 3.5 SP1 Memory: At least 2 GB RAM Available disk space: At least 2 GB Browser: Microsoft® Internet Explorer 6.0 or later Display: XGA (1024 × 768), True Color (32-bit) or higher Optical drive: CD/DVD drive The following software is required to customize the software: Microsoft® Visual Studio® 2008 Professional or Microsoft® Visual Studio® 2010 Professional or Microsoft® Visual Studio® 2012 Professional or Microsoft® Visual Studio® 2013 Professional	— (Media only)	CD-ROM	FH-AP1
		1 license	—	FH-AP1L

Accessories

Item	Descriptions				Model
	USB Memory		2 GB		FZ-MEM2G
16 GB				FZ-MEM16G	
	SD Card		2 GB		HMC-SD293
4 GB				HMC-SD493	
16 GB				HMC-SD1A3	
—	Mouse Recommended Products Driverless wired mouse (A mouse that requires the mouse driver to be installed is not supported.)				---
	EtherCAT junction slaves	3 port	Power supply voltage: 20.4 to 28.8 VDC (24 VDC -15 to 20%)	Current consumption: 0.08 A	GX-JC03
		6 port		Current consumption: 0.17 A	GX-JC06
	Industrial Switching Hubs for EtherNet/IP and Ether- net	5 port		Current consumption: 0.07 A	W4S1-05D
—	Calibration Plate				FZD-CAL
	Common items related to DIN rail (for FH-L551/-L551-10)	DIN rail mounting bracket (For Lite Controllers)			FH-XDM-L
		DIN 35mm rail	PHOENIX CONTACT	• Length: 75.5/95.5/115.5/200 cm • Height: 7.5mm • Material: Iron • Surface: Conductive	NS 35/7,5 PERF
				• Length:75.5/95.5/115.5/200 cm • Height: 15mm • Material: Iron • Surface: Conductive	NS 35/15 PERF
—		End plate	PHOENIX CONTACT	Need 2 pieces each Sensor Con- troller	CLIPFIX 35
—	External Lights *1		External lighting controller	LED	FLV Series
				High-brightness LED	FL-BR/DR Series
				Photometric Stereo Light	FL-PS Series
			Built-in lighting controller	MDMC Light	FL-MD Series
	For Intelligent Compact Digital CMOS Camera			Mounting Bracket	FQ-XL
				Mounting Brackets	FQ-XL2
				Polarizing Filter Attachment	FQ-XF1
				Cover Attachment (for replacement)	FQ-XF2
—	Mounting Bracket for FZ-S□X				FZ-S-XLC
	Mounting Bracket for FH-S□, FZ-S□5M□, FH-S□X05, FH-S□X12, FH-S□21R				FH-SM-XLC
	Mounting Bracket for FH-S□12				FH-SM12-XLC
	M42 - F Mount Conversion Adapter				FH-ADF/M42-10

*1 Refer to the Vision Accessory Catalog (Cat. No. Q198) for details.

*2 This SD card cannot be used with the FH-L551/-L551-10. Use the recommended SD cards listed below.

FH-Series

Lenses

Refer to the *Vision Accessory Catalog* (Cat. No. Q198) for details.

Resolution	Camera Model	Size of image element	Recommended lens		
			Standard Lens	Telecentric Lens	Vibrations and Shocks Resistant Lens
300,000-pixel	FZ-S/SC	1/3" equivalent	SV-V Series	VS-TCH Series	VS-MCA Series
	FH-SM				
400,000-pixel	FH-SMX/SCX	1/2.9" equivalent	SV-H Series	VS-TCH Series	VS-MCA Series
1.6 million-pixel	FH-SMX01/SCX01				
2 million-pixel	FZ-S2M/SC2M	1/1.8" equivalent	VS-H1 Series	VS-TEV Series	VS-MCH1 Series
	FH-SM02/SC02	2/3" equivalent *1	SV-H Series	VS-TCH Series	VS-MCA Series
	FH-SMX02/SCX02	1/1.7" equivalent	SV-H Series	VS-TCH Series	VS-MCA Series
3.2 million-pixel	FH-SMX03/SCX03	1/1.8" equivalent	SV-H Series	VS-TCH Series	VS-MCA Series
4 million-pixel	FH-SM04/SC04	1" equivalent	VS-H1 Series	VS-TEV Series	VS-MCH1 Series
5 million-pixel	FZ-S5M3/SC5M3	2/3" equivalent	SV-H Series	VS-TCH Series	VS-MCA Series
	FH-SMX05/SCX05	2/3" equivalent			
6 million-pixel	FH-SM06R/SC06R	1/1.8" equivalent	SV-H Series	VS-TCH Series	VS-MCA Series
12 million-pixel	FH-SMX12/SCX12	1.1" equivalent	VS-LLD Series VS-HVA Series	VS-TEV Series	---
	FH-SM12/SC12	1.76" equivalent	VS-L/M42-10 Series	---	---
20.4 million-pixel	FH-SM21R/SC21R	1" equivalent	VS-LLD Series VS-HVA Series	VS-TEV Series	VS-MCH1 Series

*1 A lens recommended for a 1" image element should be used for an image element size equivalent to 2/3". Vignetting may occur with a lens recommended for a 2/3" image element.

Recommended third-party lenses

Camera Type	Camera Model	Size of image element	Recommended manufacturer	Recommended lens	
				Standard Lens	Telecentric Lens
SWIR Cameras 330,000-pixel	FH-SMX-SWIR	1/4" equivalent	VS Technology CO., LTD	VS-H1-SWIR Series	VS-THV Series
SWIR Cameras 1.31 million-pixel	FH-SMX-01-SWIR	1/2" equivalent			
Small Digital CMOS Cameras	FH-SMX01-SFL FH-SCX01-SFL FH-SMX01-SFS FH-SCX01-SFS	1/2.9" equivalent	Edmund Optics	Blue Series M12 Lenses *1 f=3 mm, #89-340 f=6 mm, #38-011 f=17.5 mm, #69-265 M12 Lock Nut 1 Pack, #64-102 10 Pack, #16-788 S-Mount Extension Tube 5 mm, #63-955 10 mm, #63-956 15 mm, #63-957	---

*1 Products are available with different F-values (aperture values).
Smaller F-values provide brighter images but a shallower depth of field. Select according to your application.

Ratings and Specifications (FH Sensor Controllers)

High-speed, Large-capacity Controller

Sensor Controller Series			FH-5552/5551/5052/5051 Series			FH-2052/FH-2051 Series		
Sensor Controller Model			FH-5552/5551/ 5052/5051	FH-5552-10/ 5551-10/ 5052-10/ 5051-10	FH-5552-20/ 5551-20/ 5052-20/ 5051-20	FH-2052/2051	FH-2052-10/ 2051-10	FH-2052-20/ 2051-20
Parallel IO			NPN/PNP (common)					
Memory, Storage			FH-5552 Series: 32 GB RAM, 128 GB ROM FH-5551 Series: 32 GB RAM, 64 GB ROM FH-5052 Series: 8 GB RAM, 64 GB ROM FH-5051 Series: 8 GB RAM, 64 GB ROM			FH-2052 Series: 8 GB RAM, 64 GB ROM FH-2051 Series: 8 GB RAM, 64 GB ROM		
Number of cores			FH-5552 Series: 8 cores FH-5551 Series: 4 cores FH-5052 Series: 8 cores FH-5051 Series: 4 cores			FH-2052 Series: 2 cores FH-2051 Series: 2 cores		
Main Functions	Operation Mode	Standard	Yes					
		Double Speed Multi-input	Yes					
		Non-stop adjustment mode	Yes					
		Multi-line random-trigger mode	Yes (Maximum 8 lines) *1					
	Parallel Processing		Yes					
	Number of Connectable Camera		2	4	8	2	4	8
	Supported Camera	FH-S series camera	All of the FH-S series cameras are connectable.			All of the FH-S series cameras are connectable.		All of the FH-S series cameras are connectable. *2
		FZ-S series camera	All of the FZ-S series cameras are connectable.					
	Camera I/F		OMRON I/F					
	Possible Number of Captured Images		Refer to page 40.					
	Possible Number of Logging Images to Sensor Controller		Refer to the <i>Vision System FH Series User's Manual</i> (Cat. No. Z365).					
	Possible Number of Scenes		128					
	Operating on UI	USB Mouse	Yes (wired USB and driver is unnecessary type)					
		Touch Panel	Yes (RS-232C/USB connection: FH-MT12)					
	Setup		Create the processing flow using Flow editing.					
	Language		Japanese, English, Simplified Chinese, Traditional Chinese, Korean, German, French, Spanish, Italian, Vietnamese, Polish					
External Interface	Serial Communication		RS-232C × 1					
	Ethernet Communication	Protocol	Non-procedure (TCP/UDP)					
		I/F	1000BASE-T × 2					
	EtherNet/IP Communication		Yes (Target/Ethernet port)					
	PROFINET Communication		• Yes (Slave/Ethernet port) • Conformance class A					
	EtherCAT Communication		Yes (slave) Refer to page 47 about EtherCAT Communications Specifications.					
	Parallel I/O	• 12 inputs/31 outputs: • Use 1 Line. • Operation mode: Except Multi-line random-trigger mode.						
		• 17 inputs/37 outputs: • Use 2 Lines. • Operation mode: Multi-line random-trigger mode.						
		• 14 inputs/29 outputs: • Use 3 to 4 Lines. • Operation mode: Multi-line random-trigger mode.						
		• 19 inputs/34 outputs: • Use 5 to 8 Lines. • Operation mode: Multi-line random-trigger mode.						
	Encoder Interface		Input voltage: 5 V ± 5% Signal: RS-422A Line Driver Level Phase A/B/Z: 1 MHz					
	Monitor Interface		DVI-I output (Analog RGB & DVI-D single link) × 1					
	USB I/F		USB3.0 host × 2 (BUS Power: Port5 V/0.5 A) USB2.0 host × 4 (BUS Power: Port5 V/0.5 A)					
	SD Card I/F		SDHC × 1					
Indicator Lamps	Main	POWER: Green ERROR: Red RUN: Green ACCESS: Yellow						
	Ethernet	NET RUN1: Green LINK/ACT1: Yellow NET RUN2: Green LINK/ACT2: Yellow						
	SD Card	SD POWER: Green SD BUSY: Yellow						
	EtherCAT	ECAT RUN: Green LINK/ACT IN: Green LINK/ACT OUT: Green ECAT ERR: Red						
Power-supply voltage			20.4 VDC to 26.4 VDC					
Current consumption	• When connecting the following cameras Intelligent compact digital CMOS camera Shortwave Infrared (SWIR) Camera • When connecting the following light or lighting controller without an external power supply FLV-TCC1, FLV-TCC4, FLV-TCC3HB FLV-TCC1EP, FL-TCC1 • When connecting the following light or light- ing controller FL-TCC1PS, FL-MD□MC		5.6 A max.	7.7 A max.	12.2 A max.	4.6 A max.	6.6 A max.	11.2 A max.
	Other than above		4.5 A max.	5.5 A max.	7.3 A max.	3.5 A max.	4.3 A max.	6.3 A max.
Built-in FAN			Yes					

FH-Series

Sensor Controller Series			FH-5552/5551/5052/5051 Series			FH-2052/FH-2051 Series		
Sensor Controller Model			FH-5552/5551/ 5052/5051	FH-5552-10/ 5551-10/ 5052-10/ 5051-10	FH-5552-20/ 5551-20/ 5052-20/ 5051-20	FH-2052/2051	FH-2052-10/ 2051-10	FH-2052-20/ 2051-20
Usage Environment	Ambient temperature range		Operating: 0°C to +45°C Storage: -20 to +65°C (with no icing or condensation)			Operating: 0°C to +50°C Storage: -20 to +65°C (with no icing or condensation)		
	Ambient humidity range		Operating:35 to 85%RH Storage: 35 to 85%RH (with no condensation)					
	Ambient atmosphere		No corrosive gases					
	Vibration tolerance		Oscillation frequency: 10 to 150 Hz Half amplitude: 0.1 mm Acceleration: 15 m/s ² Sweep time: 8 minute/count Sweep count: 10 Vibration direction: up and down/front and behind/left and right					
	Shock resistance		Impact force: 150 m/s ² Test direction: up and down/front and behind/left and right					
	Noise immunity	Fast Transient Burst	• DC power Direct infusion: 2kV, Pulse rising: 5ns, Pulse width: 50ns, Burst continuation time: 15ms/0.75ms, Period: 300ms, Application time: 1 min • I/O line Direct infusion: 1kV, Pulse rising: 5ns, Pulse width: 50ns, Burst continuation time: 15ms/0.75ms, Period: 300ms, Application time: 1 min					
	Grounding		Type D grounding (100 Ω or less grounding resistance) *3					
External Features	Dimensions		190 mm × 115 mm × 182.5 mm Note Height: Including the feet at the base.					
	Weight		Approx. 3.4 kg	Approx. 3.6 kg	Approx. 3.6 kg	FH-2052 series: Approx. 3.4 kg FH-2051 series: Approx. 3.0 kg	FH-2052-□0 series: Approx. 3.6 kg FH-2051-□0 series: Approx. 3.2 kg	
	Degree of protection		IEC60529 IP20					
	Case material		Cover: zinc-plated steel plate Side plate: aluminum (A6063)					
Accessories			Instruction Sheet (Japanese and English): 1, Installation Instruction Manual for FH series:1, General Compliance Information and Instructions for EU:1, Member registration sheet: 1, Power source (FH-XCN): 1 (male), Ferrite core for camera cable: 2 (FH-5□□□, FH-2□□□), 4 (FH-5□□□-10, FH-2□□□-10), 8 (FH-5□□□-20, FH-2□□□-20)					

*1 According to the CPU performance, FH-205□ series is recommended to use up to two lines in this mode.

*2 Up to eight cameras can be connected in total including up to four 12 or 20.4 million-pixel cameras.

*3 Existing third class grounding

Lite Controllers

Sensor Controller Series			FH-L551 Series	
Sensor Controller Model			FH-L551	FH-L551-10
Parallel IO			NPN/PNP (common)	
Memory, Storage			4GB RAM, 32GB ROM	
Main Functions	Operation Mode	Standard	Yes	
		Double Speed Multi-input	Yes	
		Non-stop adjustment mode	Yes	
		Multi-line random-trigger mode	No	
	Parallel Processing		Yes	
	Number of Connectable Camera		2	4
	Supported Camera	FH-S series camera	All of the FH-S series cameras except FH-SM21R/SC21R	
		FZ-S series camera	All of the FZ-S series cameras are connectable.	
	Camera I/F		OMRON I/F	
	Possible Number of Captured Images		Refer to page 40.	
	Possible Number of Logging Images to Sensor Controller		Refer to the <i>Vision System FH Series User's Manual</i> (Cat. No. Z365).	
	Possible Number of Scenes		128	
	UI Operations	USB Mouse	Yes (wired USB driver-less type)	
		Touch Panel	Yes (RS-232C/USB connection: FH-MT12)	
Setup		Create the processing flow using Flow editing.		
Language		Japanese, English, Simplified Chinese, Traditional Chinese, Korean, German, French, Spanish, Italian, Vietnamese, Polish		
External Interface	Serial Communication		RS-232C × 1	
	Ethernet Communication	Protocol	Non-procedure (TCP/UDP)	
		I/F	1000BASE-T × 1	
	EtherNet/IP Communication		Yes (Target/Ethernet port)	
	PROFINET Communication		• Yes (Slave/Ethernet port) • Conformance class A	
	EtherCAT Communication		No	
	Parallel I/O		• High-speed input: 1 • Normal speed: 9 • High-speed output: 4 • Normal speed: 23	
	Encoder Interface		None	
	Monitor Interface		DVI-I output (Analog RGB & DVI-D single link) × 1	
	USB I/F		USB2.0 host × 1: BUS Power: Port 5 V/0.5 A USB3.0 × 1: BUS Power: Port 5 V/0.5 A	
SD Card I/F		SDHC × 1		
Indicator Lamps	Main	POWER: Green ERROR: Red RUN: Green ACCESS: Yellow		
	Ethernet	NET RUN: Green LINK/ACT: Yellow		
	SD Card	SD POWER: Green SD BUSY: Yellow		
	EtherCAT	None		
Power-supply voltage			20.4 VDC to 26.4 VDC	
Current consumption	• When connecting the following cameras Intelligent compact digital CMOS camera Shortwave Infrared (SWIR) Camera • When connecting the following light or lighting controller without an external power supply FLV-TCC1, FLV-TCC4, FLV-TCC3HB FLV-TCC1EP, FL-TCC1 • When connecting the following light or lighting controller FL-TCC1PS, FL-MD□MC		2.7 A max.	4.4 A max.
	Other than above		1.5 A max.	2.0 A max.
	Built-in FAN			No
Usage Environment	Ambient temperature range		Operating: 0°C to 55°C Storage: -25 to +70°C	
	Ambient humidity range		Operating and Storage: 10 to 90%RH (with no condensation)	
	Ambient atmosphere		No corrosive gases	
	Vibration tolerance		5 to 8.4 Hz with 3.5 mm amplitude, 8.4 to 150 Hz, acceleration of 9.8 m/s ² 100 min each in X, Y, and Z directions (10 sweeps of 10 min each = 100 min total)	
	Shock resistance		Impact force: 150 m/s ² Test direction: up and down/front and behind/left and right	
	Noise immunity	Fast Transient Burst	• DC power Direct infusion: 2kV, Pulse rising: 5ns, Pulse width: 50ns, Burst continuation time: 15ms/0.75ms, Period: 300ms, Application time: 1 min • I/O line Direct infusion: 1kV, Pulse rising: 5ns, Pulse width: 50ns, Burst continuation time: 15ms/0.75ms, Period: 300ms, Application time: 1 min	
			Type D grounding (100 Ω or less grounding resistance) *	
External Features	Dimensions		200 mm × 80 mm × 130 mm	
	Weight		Approx. 1.5 kg	Approx. 1.5 kg
	Degree of protection		IEC60529 IP20	
	Case materials		PC	
Accessories			Instruction Sheet (Japanese and English): 1, Installation Instruction Manual for FH-L series:1, General Compliance Information and Instructions for EU:1, Member registration sheet: 1, Power source (FH-XCN-L):1 (male)	

* Existing third class grounding

Maximum Number of Loading Images during Multi-input

Type of camera	Model of sensor controller	
	FH-2□□□/FH-2□□□-□□ FH-5□□□/FH-5□□□-□□ FH-L□□□/FH-L□□□-□□	
CCD camera (0.3 mega pixels)	256	
CCD camera (2 mega pixels)	64	
CCD camera (5 mega pixels)	25	
CMOS camera (0.3 mega pixels)	256	
CMOS camera (0.4 mega pixels)	256	
CMOS camera (1.6 mega pixels)	64	
CMOS camera (2 mega pixels)	51	
CMOS camera (3.2 mega pixels)	36	
CMOS camera (4 mega pixels)	32	
CMOS camera (5 mega pixels)	25	
CMOS camera (6 mega pixels)	21	
CMOS camera (12 mega pixels)	10	
CMOS camera (20.4 mega pixels)	6	
Shortwave infrared (SWIR) camera (0.33 megapixels)	256	
Shortwave infrared (SWIR) camera (1.31 megapixels)	85	

Note: 1. The multi-input function cannot be used when the built-in lighting of an Intelligent Compact Digital Camera, FZ-SQ□□□□, is used.
 2. The maximum number of images loaded does not change even if partial reading of camera images is selected.
 When using two camera cables for connection, the maximum number of loaded images during multi-input is twice the number given in the table.

Ratings and Specifications (Cameras)

High-speed Digital CMOS cameras

Model	FH-SM	FH-SM02	FH-SC02	FH-SM04	FH-SC04	FH-SM12	FH-SC12
Image elements	CMOS image elements (1/3-inch equivalent)	CMOS image elements (2/3-inch equivalent) *1		CMOS image elements (1-inch equivalent)		CMOS image elements (1.76-inch equivalent)	
Color/ Monochrome	Monochrome	Monochrome	Color	Monochrome	Color	Monochrome	Color
Effective pixels	640 (H) × 480 (V)	2,040 (H) × 1,088 (V)		2,040 (H) × 2,048 (V)		4,084 (H) × 3,072 (V)	
Pixel size	7.4 (μm) × 7.4 (μm)	5.5 (μm) × 5.5 (μm)		5.5 (μm) × 5.5 (μm)		5.5 (μm) × 5.5 (μm)	
Shutter function	Electronic shutter; Shutter speeds can be set from 20 μs to 100 ms.	Electronic shutter; Shutter speeds can be set from 25 μs to 100 ms.				Electronic shutter; Shutter speeds can be set from 60 μs to 100 ms.	
Partial function	1 to 480 lines	1 to 1,088 lines	2 to 1,088 lines	1 to 2,048 lines	2 to 2,048 lines	4 to 3,072 lines (4-line increments)	
Frame rate (Image Acquisition Time *2)	308 fps (3.3 ms)	219 fps (4.6 ms) *3		118 fps (8.5 ms) *3		38.9 fps (25.7 ms) *3	
Lens mounting	C mount					M42 mount	
Field of vision, installation distance	Selecting a lens according to the field of vision and installation distance						
Ambient temperature range	Operating: 0 to 40 °C, Storage: -25 to 65 °C (with no icing or condensation)						
Ambient humidity range	Operating and storage: 35% to 85% (with no condensation)						
Weight	Approx.105 g (w/base)	Approx.110 g (w/base)				Approx.320 g (w/base)	
Accessories	Instruction Sheet						

Model	FH-SMX	FH-SCX	FH-SMX01	FH-SCX01	FH-SMX02	FH-SCX02	FH-SMX03	FH-SCX03	FH-SMX05	FH-SCX05	FH-SMX12	FH-SCX12
Image elements	CMOS image elements (1/2.9-inch equivalent)				CMOS image elements (1/1.7-inch equivalent)		CMOS image elements (1/1.8-inch equivalent)		CMOS image elements (2/3-inch equivalent)		CMOS image elements (1.1-inch equivalent)	
Color/ Monochrome	Monochrome	Color	Monochrome	Color	Monochrome	Color	Monochrome	Color	Monochrome	Color	Monochrome	Color
Effective pixels	720 (H) × 540 (V)		1,440 (H) × 1,080 (V)		1,600 (H) × 1,200 (V)		2,046 (H) × 1,536 (V)		2,448 (H) × 2,048 (V)		4,092 (H) × 3,000 (V)	
Pixel size	6.9 (μm) × 6.9 (μm)		3.45 (μm) × 3.45 (μm)		4.5 (μm) × 4.5 (μm)		3.45 (μm) × 3.45 (μm)					
Shutter function	Electronic shutter; Shutter speeds can be set from 1 μs to 100 ms.										Electronic shutter; Shutter speeds can be set from 15 μs to 100 ms.	
Partial function	4 to 540 lines (4-line increments)		4 to 1,080 lines (4-line increments)		8 to 1,200 lines (8-line increments)		4 to 1,536 lines (4-line increments)		4 to 2,048 lines (4-line increments)		4 to 3,000 lines (4-line increments)	
Frame rate (Image Acquisition Time *2)	523.6 fps (1.9 ms)		154.6 fps (6.5 ms)		90.3 fps (11.1 ms) *4		151.4 fps (6.6 ms) *3		97.2 fps (10.3 ms) *3		40.1 fps (24.9 ms) *3	
Lens mounting	C mount											
Field of vision, installation distance	Selecting a lens according to the field of vision and installation distance											
Ambient temperature range	Operating: 0 to 50 °C, Storage: -20 to 65 °C (with no icing or condensation)		Operating: 0 to 45 °C, Storage: -20 to 65 °C (with no icing or condensation)		Operating: 0 to 40 °C, Storage: -25 to 65 °C (with no icing or condensation)		Operating: 0 to 40 °C, Storage: -20 to 65 °C (with no icing or condensation)					
Ambient humidity range	Operating and storage: 35% to 85% (with no condensation)											
Weight	Approx.48 g (w/base)						Approx.85 g (w/base)					
Accessories	Instruction Sheet, General Compliance Information and Instructions for EU											

*1 A lens recommended for a 1" image element should be used for an image element size equivalent to 2/3". Vignetting may occur with a lens recommended for a 2/3" image element.

*2 The image acquisition time does not include the image conversion processing time of the sensor controller.

*3 Frame rate in high speed mode when the camera is connected using two camera cables.

*4 Frame rate in high speed mode. For other conditions, please refer to the *camera* section in the *Ordering Information* for details.

Digital CMOS Cameras

Model	FH-SM06R		FH-SC06R	FH-SM21R		FH-SC21R	FZ-S5M3	FZ-SC5M3	
Image Elements	CMOS image elements (1/1.8-inch equivalent)			CMOS image elements (1-inch equivalent)			CMOS image elements (2/3-inch equivalent)		
Color/Monochrome	Monochrome		Color	Monochrome		Color	Monochrome		Color
Effective Pixels	3,072 (H) × 2,048 (V)			5,544 (H) × 3,692 (V)			2,448 (H) × 2,048 (V)		
Pixel Size	2.4 (μm) × 2.4 (μm)						3.45 (μm) × 3.45 (μm)		
Scan Type	Progressive								
Shutter Method	Rolling shutter						Global shutter		
Shutter Function	Electronic shutter; Shutter speeds can be set from 200 μs to 100 ms. *1			Electronic shutter; Shutter speeds can be set from 50 μs to 100 ms. *4			Electronic shutter; Shutter speeds can be set from 20 μs to 100 ms.		
Partial function	2 lines to 2,048 lines (in steps of 2 lines)			1,848 to 3,692 lines			4 to 2,048 lines		
Frame rate (Image Acquisition Time *2)	34.1 fps (29.3 ms) *3			23.5 fps (42.6 ms) *5			25.6 fps (38.2ms)		
Lens Mounting	C mount								
Field of vision, Installation distance	Selecting a lens according to the field of vision and installation distance								
Ambient temperature range	Operating: 0 to +40°C Storage: -20 to 65°C (with no icing or condensation)						Operating: 0 to +40°C Storage: -30 to 65°C (with no icing or condensation)		
Ambient humidity range	Operating and Storage: 35 to 85% (with no condensation)								
Weight	Approx. 48 g (w/base)			Approx. 85 g (w/base)					
Accessories	Instruction Sheet, General Compliance Information and Instructions for EU								

*1 When using FH-S□06R, the actual shutter speed is rounded to the following values for the screen set values and reflected to the real operation.

Note that the reflecting method depends on the communication speed setting.

Communication speed: Standard: A multiple of 13.54 μs

Communication speed: High-speed: A multiple of 24.51 μs

For example, the actual shutter speed is below when the shutter speed is set to 2,000 μs.

Communication speed: Standard: 1,990.4 μs (147 times of 13.54 μs)

Communication speed: High-speed: 1,985.3 μs (81 times of 24.51 μs)

*2 The image acquisition time does not include the image conversion processing time of the sensor controller.

*3 The value in high speed mode. For other conditions, please refer to the *camera* section in the *Ordering Information* for details.

*4 When using FH-S□21R in the reset mode and rolling shutter, the actual shutter speed is rounded to the following values for the screen set values and reflected to the real operation.

Note that the reflecting method depends on the number of cables and communication speed setting.

Camera cable: 1, Communication speed: Standard: A multiple of 46.9 μs

Camera cable: 1, Communication speed: High-speed: A multiple of 22.3 μs

Camera cable: 2, Communication speed: Standard: A multiple of 23.5 μs

Camera cable: 2, Communication speed: High-speed: A multiple of 11.2 μs

For example, the actual shutter speed is below when the shutter speed is set to 2,000 μs.

Camera cable: 1, Communication speed: Standard: 1,969.8 μs (42 times of 46.9 μs)

Camera cable: 1, Communication speed: High-speed: 1,984.7 μs (89 times of 22.3 μs)

Camera cable: 2, Communication speed: Standard: 1,997.5 μs (85 times of 23.5 μs)

Camera cable: 2, Communication speed: High-speed: 1,993.6 μs (178 times of 11.2 μs)

*5 Frame rate in high speed mode when the camera is connected using two camera cables. For other conditions, please refer to the *camera* section in the *Ordering Information* for details.

Digital CCD Cameras

Model	FZ-S	FZ-SC	FZ-S2M	FZ-SC2M
Image elements	Interline transfer reading all pixels, CCD image elements (1/3-inch equivalent)		Interline transfer reading all pixels, CCD image elements (1/1.8-inch equivalent)	
Color/Monochrome	Monochrome	Color	Monochrome	Color
Effective pixels	640 (H) × 480 (V)		1,600 (H) × 1,200 (V)	
Pixel size	7.4 (μm) × 7.4 (μm)		4.4 (μm) × 4.4 (μm)	
Shutter function	Electronic shutter; select shutter speeds from 20 μs to 100 ms			
Partial function	12 to 480 lines		12 to 1,200 lines	
Frame rate (Image Acquisition Time *)	80 fps (12.5 ms)		30 fps (33.3 ms)	
Lens mounting	C mount			
Field of vision, installation distance	Selecting a lens according to the field of vision and installation distance			
Ambient temperature range	Operating: 0 to 50 °C Storage: -25 to 65 °C (with no icing or condensation)		Operating: 0 to 40 °C Storage: -25 to 65 °C (with no icing or condensation)	
Ambient humidity range	Operating and storage: 35% to 85% (with no condensation)			
Weight	Approx. 55 g (w/base)		Approx. 76 g (w/base)	
Accessories	Instruction manual			

* The image acquisition time does not include the image conversion processing time of the sensor controller.

Shortwave Infrared (SWIR) Camera

Model	FH-SMX-SWIR	FH-SMX01-SWIR
Image elements *1	CMOS image elements (1/4-inch equivalent)	CMOS image elements (1/2-inch equivalent)
Color/Monochrome	Monochrome	
Effective pixels	640 (H) × 512 (V)	1,280 (H) × 1,024 (V)
Pixel size	5.0 (μm) × 5.0 (μm)	5.0 (μm) × 5.0 (μm)
Shutter function	Electronic shutter: Shutter speeds can be set from 8 μs to 100 ms.	
Partial function	8 to 512 lines (8-line increments)	8 to 1,024 lines (8-line increments)
Frame rate (Image Acquisition Time *2)	240 fps (4.2 ms)	120 fps (8.3 ms)
Lens mounting	C mount	
Supported controller *3	FH-5□52/5□51/2052/2051/L551 Series	
Field of vision, installation distance	Selecting a lens according to the field of vision and installation distance *4	
Ambient temperature range	Operating: 0 to 40°C *5 Storage: -20 to 65°C (with no icing or condensation)	
Ambient humidity range	Operating and storage: 35% to 85% (with no condensation)	
Weight	Approx. 505 g (w/base)	
Accessories	• Instruction manual • General Compliance Information and Instructions for EU	

*1 If the interval between capturing images is more than 1 minute, the camera brightness value may decrease by more than 1%.

*2 The image acquisition time does not include the image conversion processing time of the sensor controller.

*3 FH-SMX-SWIR/FH-SMX01-SWIR can be supported by controller software version 6.60 or higher.


*4 Ask your OMRON representative for details.

*5 This camera controls the temperature of the image elements at 15°C to improve image quality.
If the temperature of the image elements (value of the camera's built-in temperature sensor) rises above 15°C, white spots and noise will increase.
We recommend that the ambient temperature during operation be below +37°C, or the upper part of the case temperature below +47°C.

Additional Information

Spectral sensitivity characteristics: wavelength range 400 to 1700 nm

Relative sensitivity

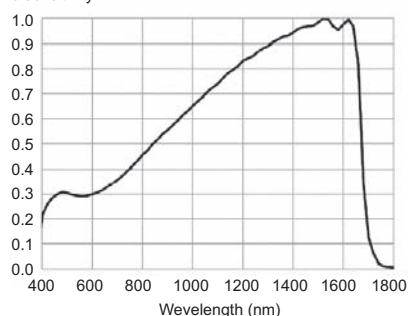

Small Digital CMOS Cameras

Model	FH-SMX01-SFL	FH-SCX01-SFL	FH-SMX01-SFS	FH-SCX01-SFS
Image elements	CMOS image elements (1/2.9-inch equivalent)			
Color/Monochrome	Monochrome	Color	Monochrome	Color
Effective pixels	1,440 (H) × 1,080 (V)			
Pixel size	3.45 (μm) × 3.45 (μm)			
Shutter function	Electronic shutter: Shutter speeds can be set from 1 μs to 100 ms.			
Partial function	4 to 1,080 lines (4-line increments)			
Frame rate (Image Acquisition Time *1)	154.6 fps (6.5 ms) *2			
Lens mounting	S mount (M12, P0.5 mm)			
Field of vision, installation distance	Selecting a lens according to the field of vision and installation distance			
Ambient temperature range	Operating of camera amp: 0 to 50°C, Operating of camera head: 0 to 40°C, Storage: -25 to 65°C (with no icing or condensation)			
Ambient humidity range	Operating and Storage: 35 to 85% (with no condensation)			
Weight	Approx. 460 g (total of camera amplifier and camera head)			
Accessories	• Instruction Sheet • General Compliance Information and Instructions for EU • installation bracket • Four mounting screws (M2 × 4)			

*1 This image acquisition time does not include the image conversion processing time of the sensor controller.

*2 Frame rate in high speed mode when the camera is connected using two camera cables. For other conditions, please refer to the *Vision System FH series Hardware Setup Manual* (Cat. No. Z366).


Intelligent Compact Digital CMOS Cameras

Model	FZ-SQ010F	FZ-SQ050F	FZ-SQ100F	FZ-SQ100N
Image elements	CMOS color image elements (1/3-inch equivalent)			
Color/Monochrome	Color			
Effective pixels	752 (H) × 480 (V)			
Pixel size	6.0 (μm) × 6.0 (μm)			
Shutter function	1/250 to 1/32,258			
Partial function	8 to 480 lines			
Frame rate (Image Acquisition Time *1)	60 fps (16.7 ms)			
Field of vision	7.5 × 4.7 to 13 × 8.2 mm	13 × 8.2 to 53 × 33 mm	53 × 33 to 240 × 153 mm	29 × 18 to 300 × 191 mm
Installation distance	38 to 60 mm	56 to 215 mm	220 to 970 mm	32 to 380 mm
LED class *2	Risk Group2			
Ambient temperature range	Operating: 0 to 50 °C Storage: -25 to 65 °C			
Ambient humidity range	Operating and storage: 35% to 85% (with no condensation)			
Weight	Approx. 150 g (w/base)		Approx. 140 g (w/base)	
Accessories	Mounting bracket (FQ-XL), polarizing filter attachment (FQ-XF1), instruction manual and warning label			


*1 The image acquisition time does not include the image conversion processing time of the sensor controller.

*2 Applicable standards: IEC62471-2


• Narrow View FZ-SQ010F




• Standard FZ-SQ050F



• Wide View (Long-distance) FZ-SQ100F



• Wide View (Short-distance) FZ-SQ100N



Ratings and Specifications (Cable, Monitor)

Camera Cables

Model	FZ-VS3 (5 m)	FZ-VSB3 (5 m)	FZ-VSBX (5 m)	FZ-VSL3 (5 m)	FZ-VSLB3 (5 m)
Type	Standard	Bend resistant	Super-bend-resistant	Right-angle	Bend resistant Right-angle
Shock resistiveness (durability)	10 to 150 Hz single amplitude 0.15 mm 3 directions, 8 strokes, 4 times				
Ambient temperature range	Operation and storage: 0 to 65 °C (with no icing or condensation)				
Ambient humidity range	Operation and storage: 40 to 70%RH (with no condensation)				
Ambient atmosphere	No corrosive gases				
Material	Cable sheath, connector: PVC				
Minimum bending radius	69mm	69mm	69mm	69mm	69mm
Weight	Approx. 390 g	Approx. 430 g	Approx. 460 g	Approx. 390 g	Approx. 430 g

Cable Extension Unit

Model	FZ-VSJ
Power supply voltage *1	11.5 to 13.5 VDC
Current consumption *2	1.5 A max.
Ambient temperature range	Operating: 0 to 50 °C; Storage: -25 to 65 °C (with no icing or condensation)
Ambient humidity range	Operating and storage: 35 to 85% (with no condensation)
Weight	Approx. 240 g
Accessories	Instruction Sheet and 4 mounting screws

*1 A 12-VDC power supply must be provided to the Cable Extension Unit when connecting the Intelligent Compact Camera, or the Lighting Controller.

*2 The current consumption shows when connecting the Cable Extension Unit to an external power supply.

Touch Panel Monitor

Model	FH-MT12	
Major Function	Display area	12.1 inch
	Resolution	1,024 (V) × 768 (H)
	Number of color	16,200,000 colors (8 bit/color)
	Brightness	500cd/m ² (Typ)
	Contrast Ratio	700:1 (Typ)
	Viewing angle	Horizontal (left and right): -80° to 80° (typ) Vertical (top and bottom): -70° to 70° (typ)
	Backlight Unit	LED, edge-light
	Backlight lifetime	About 80,000 hour
External interface	Touch panel	4wire resistive touch screen
	Video input	analog RGB
Ratings	Touch panel signal	USB RS-232C
	Power supply voltage	24 VDC (21.6 to 26.4 VDC)
	Current consumption	0.5 A
Operating environment	Insulation resistance	Between DC power supply and Touch Panel Monitor FG: 20 MΩ or higher (rated voltage 250 V)
	Ambient temperature range	Operating: 0 to 50°C, Storage: -20 to +65°C (with no icing or condensation)
	Ambient humidity range	Operating and Storage: 20 to 90 %RH (with no icing or condensation)
	Ambient environment	No corrosive gas
	Vibration resistance	10 to 150 Hz, one-side amplitude 0.1 mm (Max. acceleration 15 m/s ²) 10 times for 8 minutes for each three direction
Operation	Degree of protection	Panel mounting: IP65 on the front
	Touch pen	
Structure	Mounting	Panel mounting, VESA mounting
	Weight	Approx. 2.4 kg
	Material	Front panel: PC/PBT, Front Sheet: PET, Rear case: SUS

Note: FH Series Sensor Controllers version 5.32 or higher is required.

Long-distance Camera Cables

Model	FZ-VS4 (15 m)	FZ-VSL4 (15 m)
Type	Standard	Right-angle
Shock resistiveness (durability)	10 to 150 Hz single amplitude 0.15 mm 3 directions, 8 strokes, 4 times	
Ambient temperature range	Operation and storage: 0 to 65 °C (with no icing or condensation)	
Ambient humidity range	Operation and storage: 40 to 70%RH (with no condensation)	
Ambient atmosphere	No corrosive gases	
Material	Cable sheath, connector: PVC	
Minimum bending radius	78 mm	
Weight	Approx. 1,400 g	

Encoder Cable

Model	FH-VR
Vibration resistiveness	10 to 150 Hz single amplitude 0.1 mm 3 directions, 8 strokes, 10 times
Ambient temperature range	Operation: 0 to 50 °C; Storage: -10 to 60 °C (with no icing or condensation)
Ambient humidity range	Operation and storage: 35 to 85%RH (with no condensation)
Ambient atmosphere	No corrosive gases
Material	Cable Jacket: Heat, oil and flame resistant PVC Connector: polycarbonate resin
Minimum bending radius	65 mm
Weight	Approx. 104 g

Monitor Cables

Model	FH-VMDB (2 m)		FH-VUAB (2 m)	XW2Z-200PP-1 (2 m)
Cable type	DVI-Analog Conversion Cable		USB Cable	RS-232C Cable
Vibration resistance	10 to 150 Hz, one-side amplitude 0.1 mm, 10 times for 8 minutes for each three direction			
Ambient Temperature	Operating Condition: 0 to 50°C, Storage Condition: -10 to 60°C (with no icing or condensation)			
Ambient Humidity	Operating Condition: 35 to 85%RH, Storage Condition: 35 to 85%RH (with no icing or condensation)			
Ambient environment	No corrosive gases			
Material	Cable outer sheath, Connector: PVC			Cable outer sheath: PVC, Connector: ABS/Ni Plating
Minimum bend radius	62 mm	25 mm	59 mm	
Weight	Approx. 210 g	Approx. 95 g	Approx. 162 g	

LCD Monitor

Model	FZ-M08			
Size	8.4 inches			
Type	Liquid crystal color TFT			
Resolution	1,024 × 768 dots			
Input signal	Analog RGB video input, 1 channel			
Power supply voltage	21.6 to 26.4 VDC			
Current consumption	Approx. 0.7 A max.			
Ambient temperature range	Operating: 0 to 50 °C; Storage: -25 to 65 °C (with no icing or condensation)			
Ambient humidity range	Operating and storage: 35 to 85% (with no condensation)			
Weight	Approx. 1.2 kg			
Accessories	Instruction Sheet and 4 mounting brackets			

EtherCAT Communications Specifications

Item		Specifications
Communications standard		IEC61158 Type 12
Physical layer		100 BASE-TX (IEEE802.3)
Modulation		Base band
Baud rate		100 Mbps
Topology		Depends on the specifications of the EtherCAT master.
Transmission Media		Twisted-pair cable of category 5 or higher (double-shielded straight cable with aluminum tape and braiding)
Transmission Distance		Distance between nodes: 100 m or less
Node address setting		00 to 99
External connection terminals		RJ45 × 2 (shielded) IN: EtherCAT input data, OUT: EtherCAT output data
Send/receive PDO data sizes	Input	56 to 280 bytes/line (including input data, status, and unused areas) Up to 8 lines can be set. *
	Output	28 bytes/line (including output data and unused areas) Up to 8 lines can be set. *
Mailbox data size	Input	512 bytes
	Output	512 bytes
Mailbox		Emergency messages, SDO requests, and SDO information
Refreshing methods		I/O-synchronized refreshing (DC)

* This depends on the upper limit of the master.

Version Information

FH Series and Programming Devices

Use the latest version of Sysmac Studio Standard Edition.


FH Series	Version of FH Series	Corresponding version of Sysmac Studio Standard Edition
FH-555□ (-□) FH-505□ (-□) FH-205□ (-□)	Version 6.55 or higher	Supported by version 1.63 * or higher.
	Version 6.51	Supported by version 1.53 or higher.

* Only settings related to EtherCAT connection are available.

FH-Series

Components and Functions

Sensor Controllers
High-speed,
Large-capacity Controller
Standard Controller
(4-camera type)


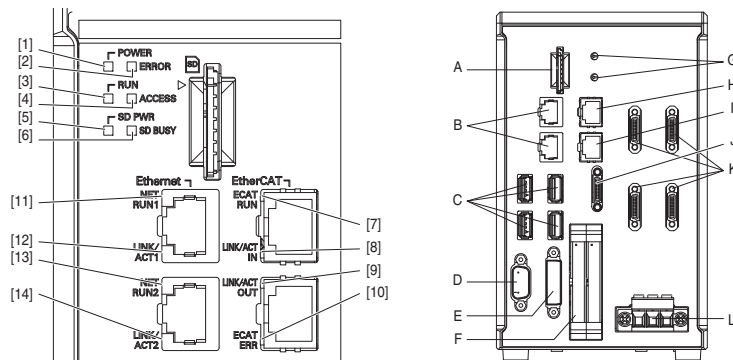


	Name	Description
[1]	POWER LED	Lit while power is ON.
[2]	ERROR LED	Lit when an error has occurred.
[3]	RUN LED	Lit while the layout turned on output setting is displayed.
[4]	ACCESS LED	Blinks while the internal nonvolatile memory is accessed.
[5]	SD POWER LED	Blinks while power is supplied to the SD memory card and the card is usable.
[6]	SD BUSY LED	Blinks while the SD memory card is accessed.
[7]	EtherCAT RUN LED	Lit while EtherCAT communications are usable.
[8]	EtherCAT LINK/ACT IN LED	Lit when connected with an EtherCAT device, and blinks while performing communications.
[9]	EtherCAT LINK/ACT OUT LED	Lit when connected with an EtherCAT device, and blinks while performing communications.
[10]	EtherCAT ERR LED	Lit when EtherCAT communications have become abnormal.
[11]	EtherNet NET RUN1 LED	Lit while EtherNet communications are usable.
[12]	EtherNet LINK/ACK1 LED	Lit when connected with an EtherNet device, and blinks while performing communications.
[13]	EtherNet NET RUN2 LED	Lit when EtherNet communications are usable.
[14]	EtherNet LINK/ACK2 LED	Lit when connected with an EtherNet device, and blinks while performing communications.

	Name	Description
A	SD memory card installation connector	Install the SD memory card. Do not plug or unplug the SD memory card during measurement operation. Otherwise measurement time may be affected or data may be destroyed.
B	EtherNet connector	Connect an EtherNet device. FH-205□ Series/FH-5□5□ Series Upper port: Ethernet port Lower port: Ethernet port, EtherNet/IP port, and PROFINET port are sharing use.
C	USB connector	Connect a USB device. Do not plug or unplug it during measurement operation. Otherwise measurement time may be affected or data may be destroyed.
D	RS-232C connector	Connect an external device such as a programmable controller.
E	DVI-I connector	Connect a monitor.
F	I/O connector (control lines, data lines)	Connect the controller to external devices such as a sync sensor and PLC.
G	EtherCAT address setup volume	Used to set a node address (00 to 99) as an EtherCAT communication device.
H	EtherCAT communication connector (IN)	Connect the opposed EtherCAT device.
I	EtherCAT communication connector (OUT)	Connect the opposed EtherCAT device.
J	Encoder connector	Connect an encoder.
K	Camera connector	Connect cameras.
L	Power supply terminal connector	Connect a DC power supply. Wire the controller independently on other devices. Wire * the ground line. Be sure to ground the controller alone.

* Use the attachment power terminal connector (male) of FH-XCN series.
For details, refer to 5-3 Sensor Controller Installation on Vision System FH series Hardware Setup Manual (Z366).

Lite Controllers (4-camera type)

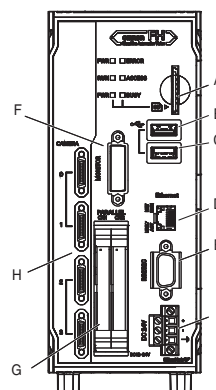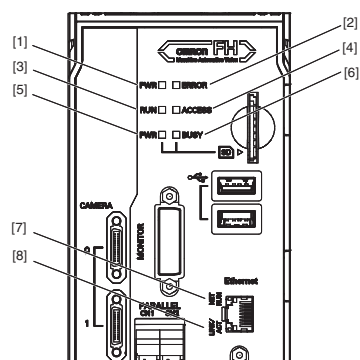

	LED name	Description
[1]	PWR LED	Lit while power is ON.
[2]	ERROR LED	Lit when an error has occurred.
[3]	RUN LED	Lit while the layout turned on output setting is displayed.
[4]	ACCESS LED	Blinks while the internal nonvolatile memory is accessed.
[5]	SD PWR LED	Lit while power is supplied to the SD memory card and the card is usable.
[6]	SD BUSY LED	Lit when access to the SD memory card.
[7]	Ethernet NET RUN LED	Lit while Ethernet communications are usable.
[8]	Ethernet LINK/ACT LED	Blinks when connected with an Ethernet device, and blinks while performing communications.

	Connector name	Description
A	SD memory card installation connector	Install the SD memory card. Do not plug or unplug the SD memory card during measurement operation. Otherwise measurement time may be affected or data may be destroyed.
B	USB 2.0 connector	Connects to USB 2.0. Do not insert or remove during loading or writing of measurement or data. The measurement time can be longer or data can be damaged.
C	USB 3.0 connector	Connects to USB 3.0. Do not insert or remove during loading or writing of measurement or data. The measurement time can be longer or data can be damaged. USB 3.0 has a high ability to supply the bus power. Use the Sensor Controller by combining USB 3.0, faster transport can be realized.
D	Ethernet connector	Connect an Ethernet device. Ethernet port, EtherNet/IP port, and PROFINET port are sharing use.
E	RS-232C connector	Connect an external device such as a programmable controller.
F	DVI-I connector	Connect a monitor.
G	Parallel connector (control lines, data lines)	Connect the controller to external devices such as a sync sensor.
H	Camera connector	Connect a camera.
I	Power supply terminal connector	Connect a DC power supply. Wire the controller independently on other devices. Wire * the ground line. Be sure to ground the FH Sensor Controller alone.

* Use the attachment power terminal connector (male) of FH-XCN-L series.

For details, refer to 5-3 Sensor Controller Installation on Vision System FH series Hardware Setup Manual(Z366).

Group	Icon	Processing Item	Corresponding Page in the Catalog
Measurement		AI Defect Inspection *1	P4
		Search	
		Flexible Search	
		Sensitive Search	
		ECM Search	
		EC Circle Search	
		Shape Search II	
		Shape Search III	P18
		EC Corner	
		Ec Cross	
		Classification	
		Edge Position	
		Edge Pitch	
		Scan Edge Position	P18
		Scan Edge Width	
		Circular Scan Edge Position	P18
		Circular Scan Edge Width	
		Intersection	
		Color Data	
		Gravity and Area	
		Labeling	
		Label Data	
		Defect	
		Precise Defect	
		Fine Matching	
		Character Inspect	P21
		Date Verification	
		Model Dictionary	
		2DCode II *2	P21
		2DCode *3	
		Barcode *4	
		OCR	P21
		OCR User Dictionary	
		Circle Angle	

Group	Icon	Processing Item	Corresponding Page in the Catalog
Measurement		Glue Bead Inspection	
		AI FineMatching *5	
Input Image		Camera Image Input FH	
		Camera Image Input HDR	P16
		Camera Image Input HDRLite	
		Photometric Stereo Image Input	
		Camera Switch	
		Measurement Image Switching	
		Multi-trigger Imaging	P16
		Multi-trigger Imaging Task	
		Position Compensation	
		Filtering	
		Background Suppression	
		Brightness Correct Filter	
Compensate image		Color Gray Filter	
		Extract Color Filter	
		Anti Color Shading	
		Stripes Removal Filter II	
		Polar Transformation	
		Trapezoidal Correction	
		Machine Simulator	
		Image Subtraction	
		Advanced filter	
		Panorama	
		Trim and Resize	P16
		Image Stitching	P16
Support measurement		Unit Macro	
		Unit Calculation Macro	
		Calculation	
		Line Regression	
		Circle Regression	
		Precise Calibration	

Group	Icon	Processing Item	Corresponding Page in the Catalog	Group	Icon	Processing Item	Corresponding Page in the Catalog
Support measurement		User Data	Used for setting of the data that can be used as common constants and variables in scene group data.	Branch		Conditional Branch	Used where more than two kinds of products on the production line need to detected separately.
		Set Unit Data	Used to change the Procltem data (setting parameters, etc.) that has been set up in a scene.			End	This Procltem must be set up as the last processing unit of a branch.
		Get Unit Data	Used to get one data (measured results, setting parameters, etc.) of Procltem that has been set up in a scene.			DI Branch	Same as Procltem "Branch". But you can change the targets of conditional branching via external inputs.
		Set Unit Figure	Used for re-setting the figure data (model, measurement area) registered in an unit.			Control Flow Normal	Set the measurement flow processing into the wait state in which the specific no-protocol command can be executed.
		Get Unit Figure	Used for get the figure data (model, measurement area) registered in an unit.			Control Flow PLC Link	Set the measurement flow processing into the wait state in which the specific PLC Link command can be executed.
		Trend Monitor	Used for displaying the information about results on the monitor, facilitating to avoid NG and analyze causes.			Control Flow Parallel	Set the measurement flow processing into the wait state in which the specific parallel command can be executed.
		Image Logging	Used for saving the measurement images to the memory and USB memory.			Control Flow Fieldbus	Set the measurement flow processing into the wait state in which the specific Fieldbus command can be executed.
		Image Conversion Logging	Used for saving the measurement images in JPEG and BMP format.			Selective Branch	Easily branch to multiple destinations.
		Data Logging	Used for saving the measurement data to the memory and USB memory.			Conditional Execution (If)	The measurement flow is divided according to the comparison result obtained using the set expressions and conditions.
		Elapsed Time	Used for calculating the elapsed time since the measurement trigger input.			Conditional Execution (Else)	Insert between the Conditional Execution (If) processing item and End If processing item. The measurement flow is divided according to the comparison result obtained using the set expressions and conditions.
		Wait	Processing is stopped only at the set time. The standby time is set by the unit of [ms].			Loop	The set processes are repeated until the loop count reaches the specified number, and then the next process starts.
		Focus	Focus setting is supported.			Loop Suspension	Insert between the Loop processing item and End Loop processing item. Used to stop the loop before the loop count reaches the specified number.
		Iris	Focus and aperture setting is supported.			Select Execution (Select)	Used to set conditions. The measurement flow is divided according to the comparison result obtained using the conditions given by expressions.
		Parallelize	A part of the measurement flow is divided into two or more tasks and processed in parallel to shorten the measurement time. This processing item is placed at the top of processing to be performed in parallel.			Select Execution (Case)	Used to make a judgment. The measurement flow is divided according to the comparison result obtained using the conditions given by expressions.
		Parallelize Task	A part of the measurement flow is divided into two or more tasks and processed in parallel to shorten the measurement time. This processing item is placed immediately before processing to be performed in parallel between Parallelize and Parallelize End.	Output result		Result Output (I/O)	Output data to the external devices such as a programmable controller or a PC via PLC Link, Parallel interface, Fieldbus interface (EtherCAT, EtherNet/IP (other than message communication), PROF-INET).
		Statistics	Used when you need to calculate an average of multiple measurement results.			Result Output (Message)	Output data to the external devices such as a programmable controller or a PC with non-procedure mode via the serial interface or EtherNet/IP (message communication). This processing item allows you to save the logging data as a ".csv" file into the Sensor Controller as well.
		Reference Calib Data	Calibration data and distortion compensation data held under other processing items can be referenced.			Result Output (Parallel I/O)	Used when outputting measurement results or judgment results to external devices such as a programmable controller or a PC via the parallel interface.
		Position Data Calculation	The specified position angle is calculated from the measured positions.			Data Output	Used when you need to output data to the external devices such as PLC or PC via serial ports.
		Stage Data	Sets and stores data related to stages.			Parallel Data Output	Used when you need to output data to the external devices such as PLC or PC via parallel ports.
		Robot Data	Sets and stores data related to robots.			Parallel Judgement Output	Used when you need to output judgement results to the external devices such as PLC or PC via parallel ports.
		Vision Master Calibration	This processing item automatically calculates the entire axis movement amount of the control equipment necessary for calibration.			Fieldbus Data Output	Outputs data to an external device, such as a Programmable Controller, through a fieldbus interface.
		PLC Master Calibration	Calibration data is created using a communication command from PLC.			Result Display	Used for displaying the texts or the figures in the camera image.
		Convert Position Data	The position angle after the specified axis movement is calculated.	Display result		Display Image File	Display selected image file.
		Movement Single Position	The axis movement that is required to match the measured position angle to the reference position angle is calculated.			Display Last NG Image	Display the last NG images.
		Movement Multi Points	The axis movements that are required to match the measured position angles to the corresponding reference position angles are calculated.			Conveyor Panorama Display	Display images of the tracking area as a panoramic image.
		Detection Point	Obtains position/angle information by referring to the coordinate values measured with the Measurement Processing Unit.			Display image Hold	Processing item to retain images, including measurement results.
		Manual Position Setting	Used to change the measurement coordinates X and Y of the measurement processing unit.				
		Camera Calibration	By setting the camera calibration, the measurement result can be converted and output as actual dimensions.				
		Data Save	The set data can be saved in the controller main unit or as scene data. The data is held even after the FH/FZ power is turned off.				
		Conveyor Calibration	Conveyor Calibration is used to calibrate camera, conveyor, and robots for conveyor tracking application.				
		Scene	The specified scene is copied to the current scene.				
		System Information	Obtain system information (e.g., memory and disk space and I/O input signal status) of the Sensor Controller.				

*1 This item can be used on the FH-5552(-□□)/FH-5551(-□□) Controller. Optional FH-UMLIC-08 AI Defect Inspection Software Installer is required.

*2 2D Codes that can be read : Data Matrix (ECC200)

*3 2D Codes that can be read : Data Matrix (ECC200), QR Code

*4 Bar Codes that can be read : JAN/EAN/UPC (including add-on codes), Code 39, Codabar (NW-7), ITF (Interleaved 2 of 5), Code 93, Code 128, GS1-128, GS1 DataBar (RSS-14 / RSS Limited / RSS Expanded), Pharmacode

*5 When used with FH-L551(-□□), use in conjunction with 0.3 or 0.4 million-pixel cameras.


Sensor Controllers

High-speed, Large-capacity Controllers/Standard Controllers

FH-5552/-5552-10/-5552-20/-5551/-5551-10/-5551-20


FH-5052/-5052-10/-5052-20/-5051/-5051-10/-5051-20

FH-2052/-2052-10/-2052-20/-2051/-2051-10/-2051-20

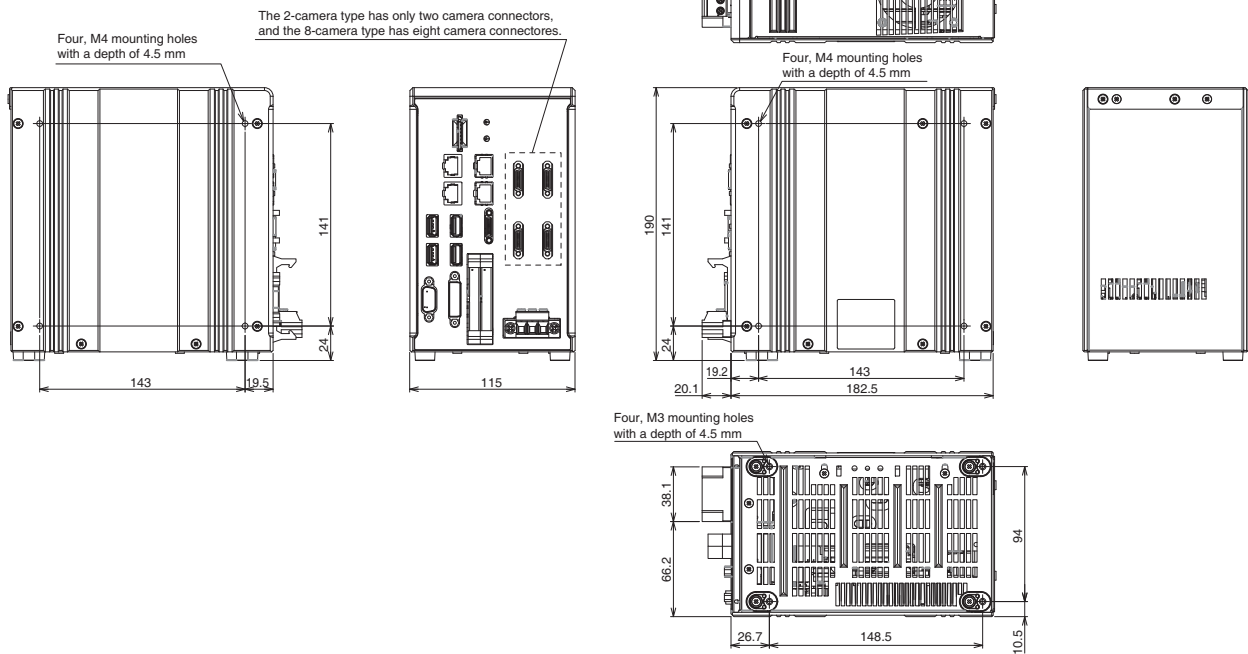

Lite Controllers

FH-L551/-L551-10

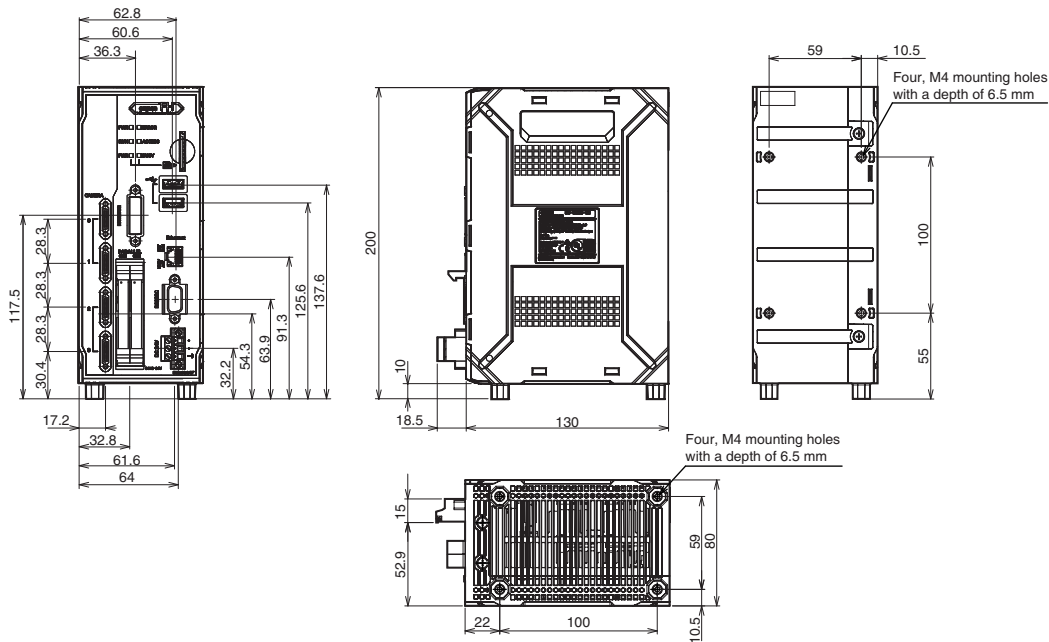


Cameras

High-speed Digital CMOS Camera/Digital CMOS Camera


300,000-pixel camera

FH-SM

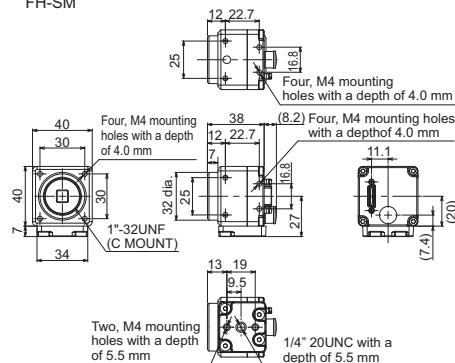

400,000-pixel camera

FH-SCX
FH-SMX

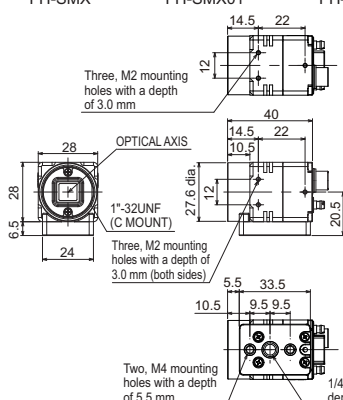

1.6 million-pixel camera

FH-SCX01
FH-SMX01

2 million-pixel camera


FH-SMX02
FH-SCX02

2 million-pixel camera

FH-SC02
FH-SM02


4 million-pixel camera

FH-SC04
FH-SM04

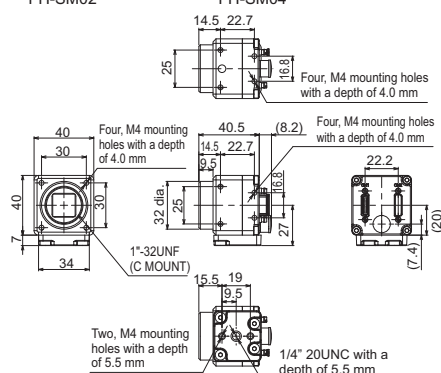


5 million-pixel camera

FZ-S5M3
FZ-SC5M3

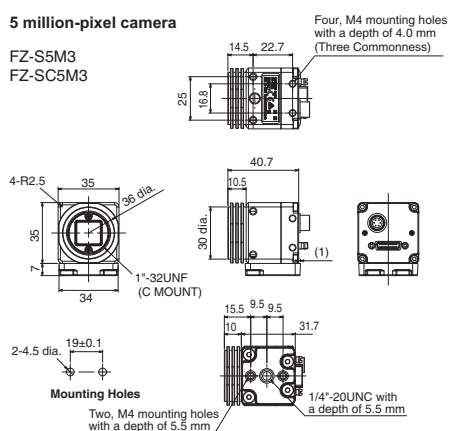

6 million-pixel camera

FH-SC06R
FH-SM06R

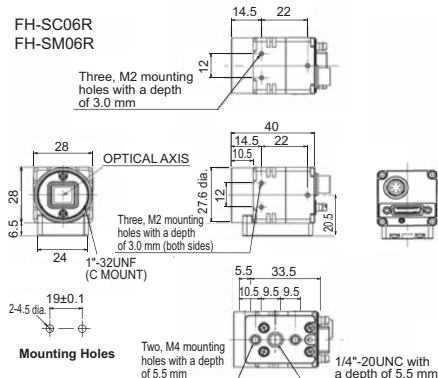

3.2 million-pixel camera

FH-SCX03
FH-SMX03

5 million-pixel camera

FH-SCX05
FH-SMX05

12 million-pixel camera


FH-SCX12
FH-SMX12

20.4 million-pixel camera

FH-SC21R
FH-SM21R

12 million-pixel camera


FH-SC12
FH-SM12

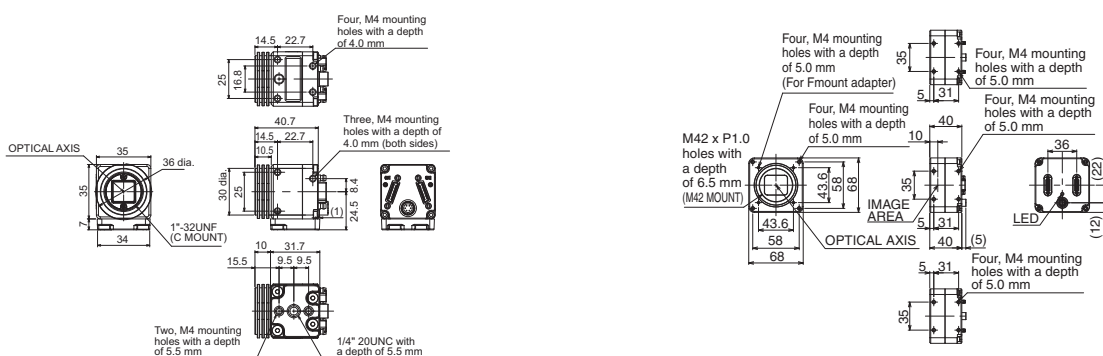

Digital CCD/CMOS Cameras


300,000-pixel camera



FZ-S
FZ-SC



2 million-pixel camera

FZ-S2M
FZ-SC2M





*1. The mounting brackets can be connected to either side.


OMRON

Cables

Camera Cable


Camera Cable

FZ-VS3

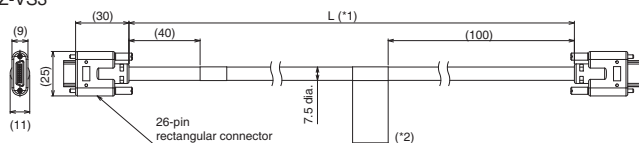


Bend resistant Camera Cable

FZ-VSB3

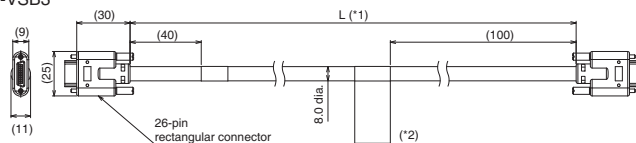


Super Bend resistant Camera Cable

FZ-VSBX

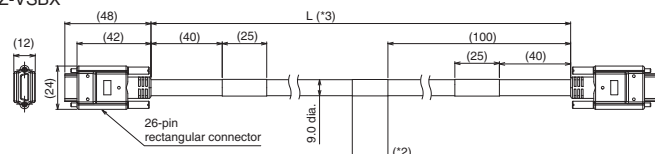


Right-angle Camera Cable

FZ-VSL3

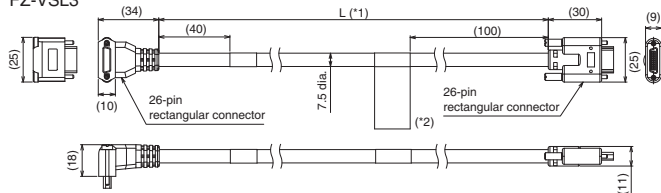


Bend resistant Right-angle Camera Cable

FZ-VSLB3

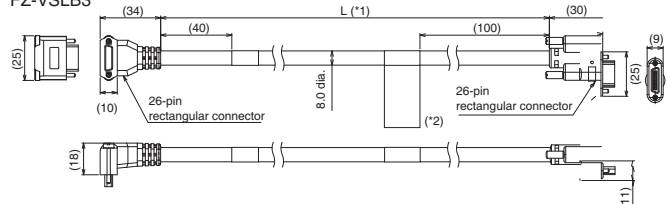


Long-distance Camera Cable

FZ-VS4

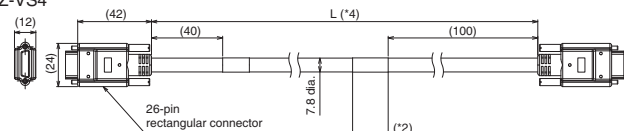

Long-distance Right-angle Camera Cable

FZ-VSL4

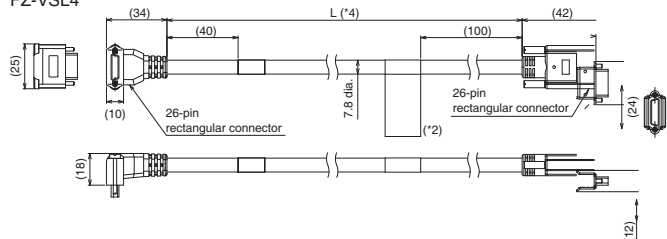

*1. Cable is available in 2m/3m/5m/10m.

*2. Each camera cables has polarity.


*3. Please ensure that the name plate side of the cable is connected to the controller.

*4. Cable is available in 5m/10m.

*5. Cable is available in 15m.


Camera Cable Extension Unit

FZ-VSJ

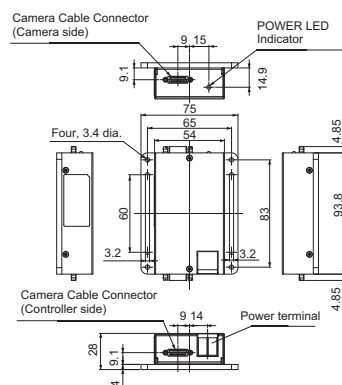


Extension Tubes for Small Camera

FZ-LESR



Lens for Small Camera


FZ-LES Series



* Overall length is available in 16.4mm/19.7mm/23.1mm/25.5mm.

Encoder Cable


FH-VR

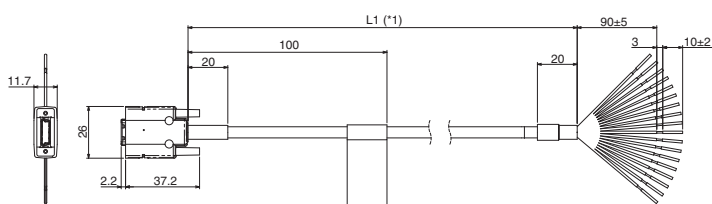

*1. Cable is available in 1.5 m.

Parallel I/O Cable


XW2Z-S013-□

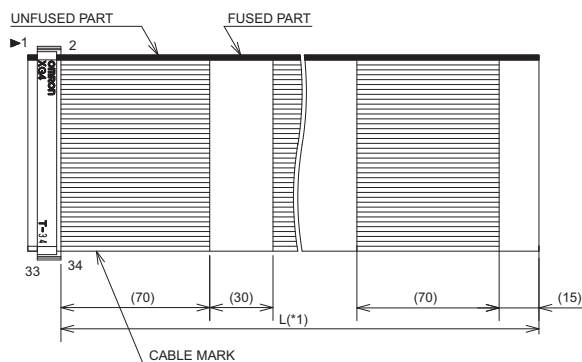

*1. Cable is available in 2m/5m.


Touch Panel Monitor

FH-MT12

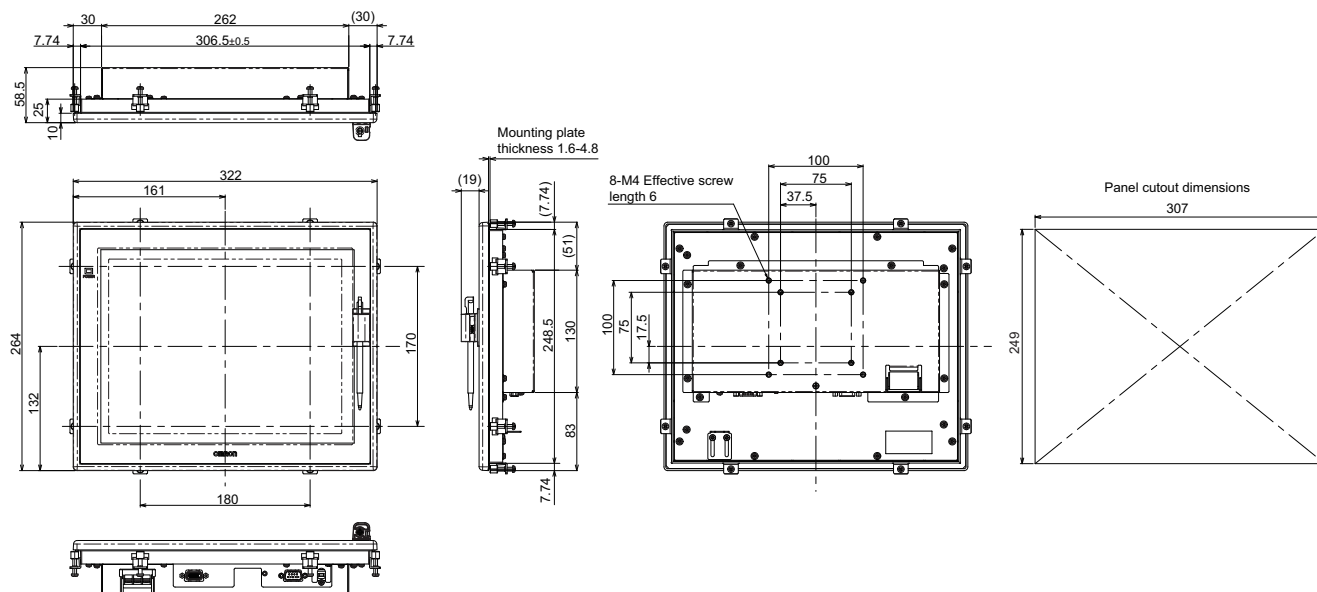


DVI-Analog Conversion Cable for Touch Panel Monitor/LCD Monitor

FH-VMDB

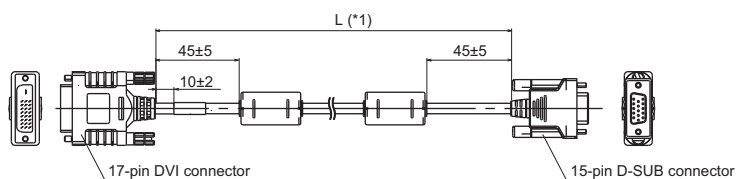


RS-232C Cable for Touch Panel Monitor

XW2Z-□□□PP-1

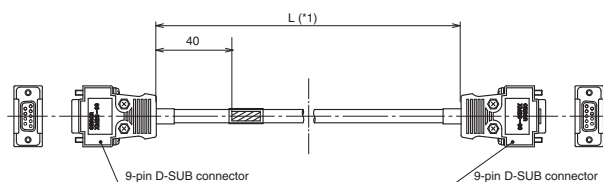

USB Cable for Touch Panel Monitor


FH-VUAB

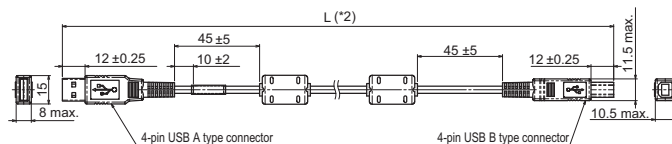

*1. Cable is available in 2m/5m/10m.
*2. Cable is available in 2m/5m.

LCD Monitor


FZ-M08

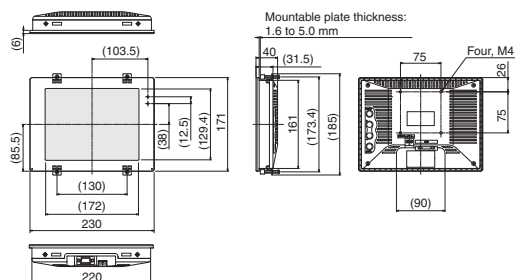

Optical Chart

Meaning of Optical Chart

The X axis of the optical chart shows the field of vision (mm) (*1), and the Y axis of the optical chart shows the camera installation distance (mm) (*2).

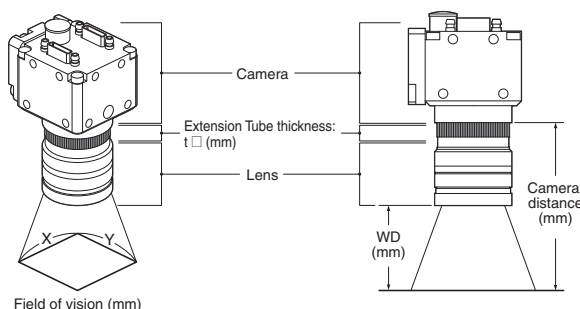


To select a lens, use the WEB Selector.
https://www.fa.omron.co.jp/lens_en


*1. The lengths of the fields of vision given in the optical charts are the lengths of the Y axis.
 *2. The vertical axis represents WD for small cameras.

Standard Lenses


High-speed Digital CMOS Camera FH-S□,
 Digital CCD Camera FZ-S□
 300,000-pixel (Using 3Z4S-LE SV-V Series)

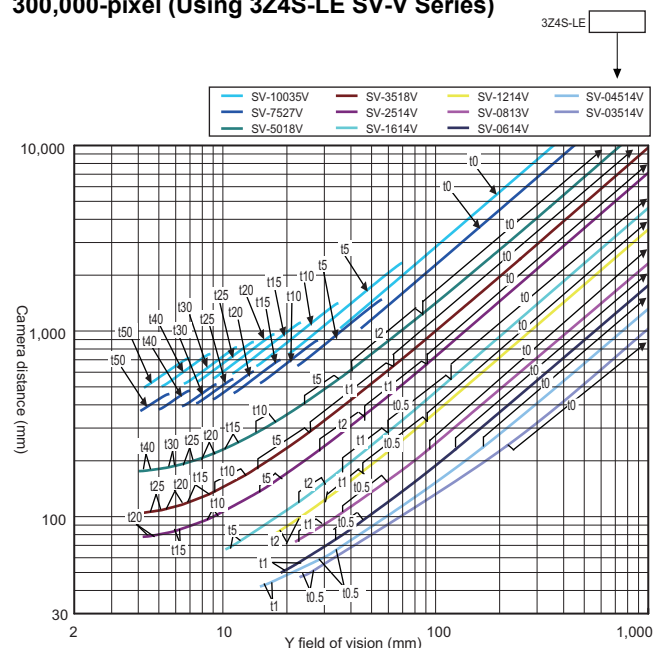


High-speed Digital CMOS Camera
 FH-S□X
 400,000-pixel
 (Using 3Z4S-LE SV-V Series)

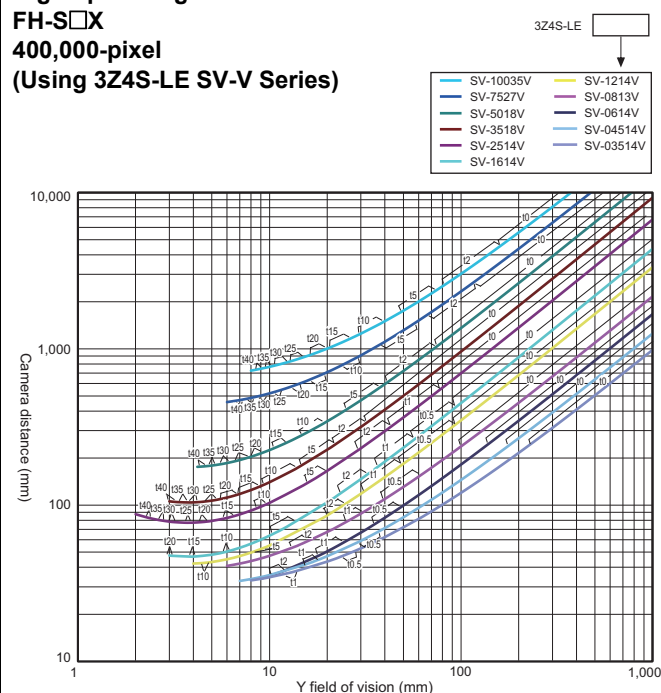


Digital CCD Camera
 FZ-S□2M
 2 million-pixel
 (Using 3Z4S-LE SV-H Series)

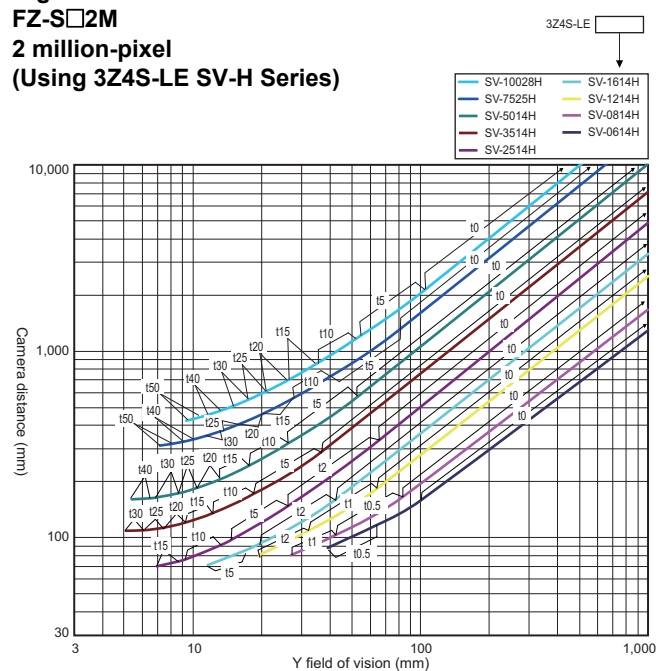


Digital CMOS Camera FZ-S□5M3,
 High-speed Digital CMOS Camera
 FH-S□X05
 5 million-pixel
 (Using 3Z4S-LE SV-H Series)

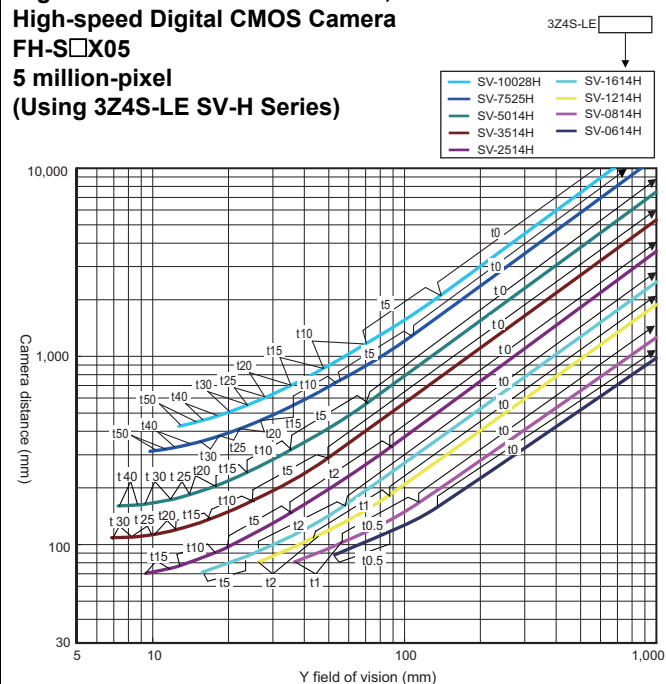


Digital CMOS Camera FH-S□06R 6 million-pixel (Using 3Z4S-LE SV-H Series)

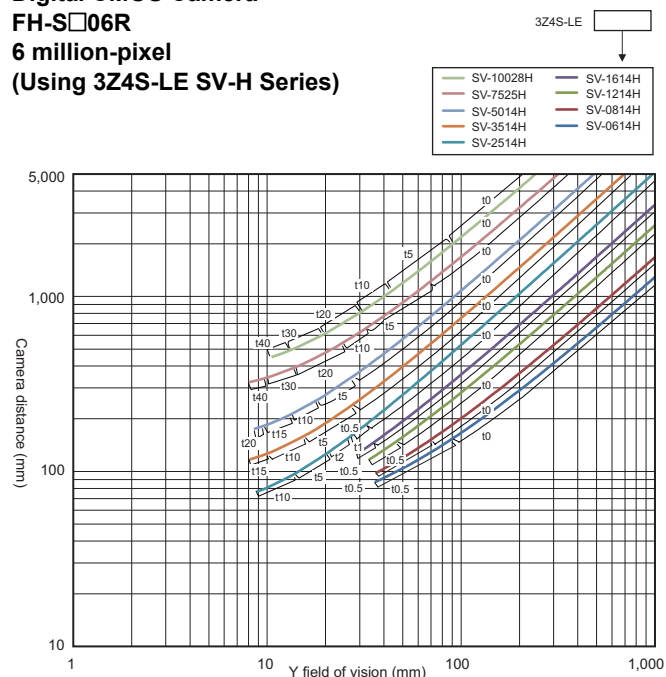


High-speed Digital CMOS Camera FH-S□X01 1.6 million-pixel (Using 3Z4S-LE SV-H Series)

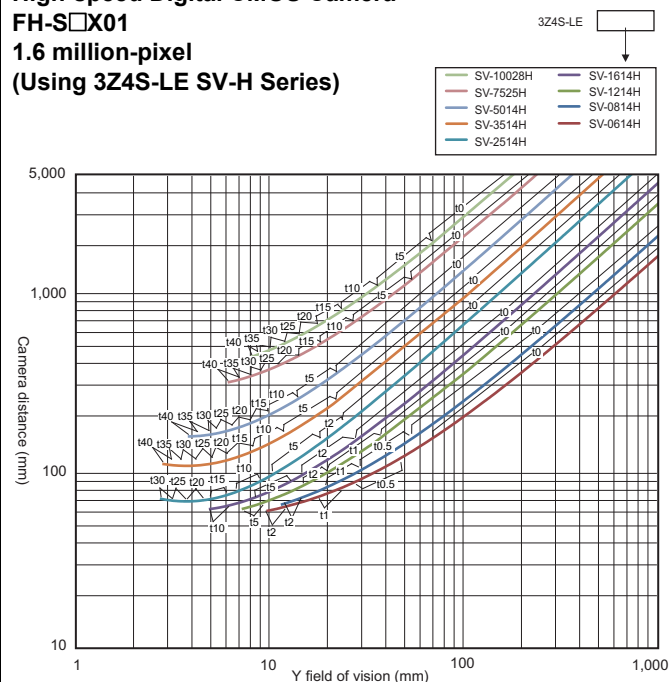

High-speed Digital CMOS Camera FH-S□X02 2 million-pixel (Using 3Z4S-LE SV-H Series)

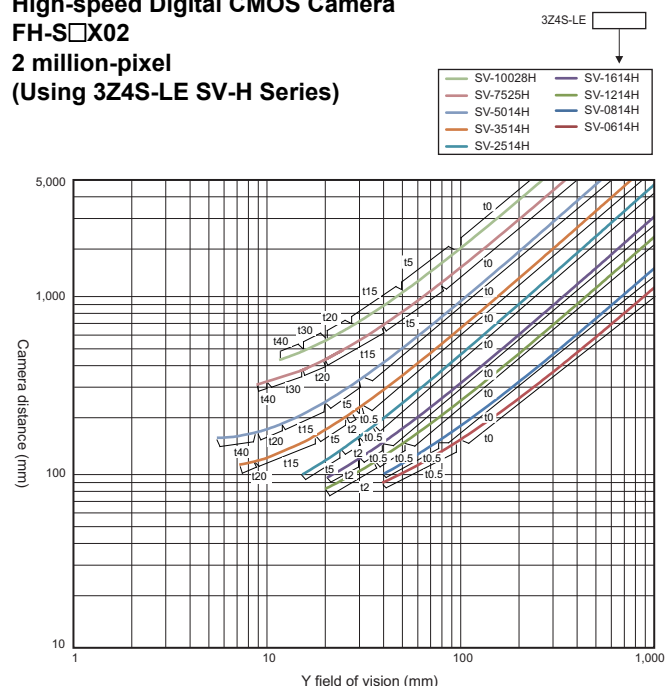


High-speed Digital CMOS Camera FH-S□X03 3.2 million-pixel (Using 3Z4S-LE SV-H Series)

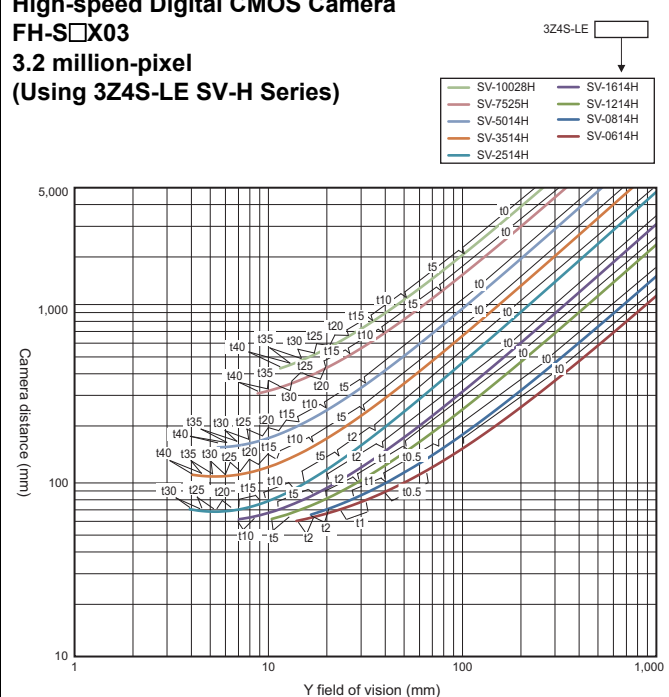

High-speed Digital CMOS Camera FH-S□02 2 million-pixel (Using 3Z4S-LE SV-H/VS-H1 Series)

3Z4S-LE


- SV-10028H
- SV-7525H
- VS-5018H1
- VS-3514H1
- VS-2514H1
- VS-1614H1N
- VS-1214H1
- VS-0814H1
- VS-0618H1

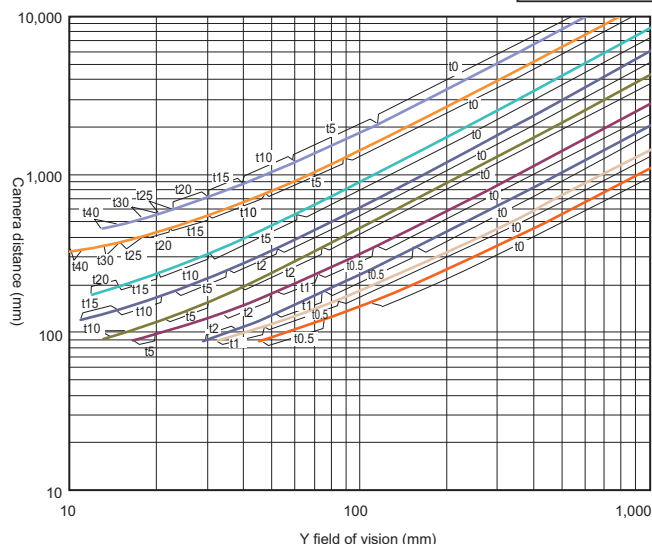

High-speed Digital CMOS Camera FH-S□04 4 million-pixel (Using 3Z4S-LE SV-H/VS-H1 Series)

3Z4S-LE


- SV-10028H
- SV-7525H
- VS-5018H1
- VS-3514H1
- VS-2514H1
- VS-1614H1N
- VS-1214H1
- VS-0814H1
- VS-0618H1

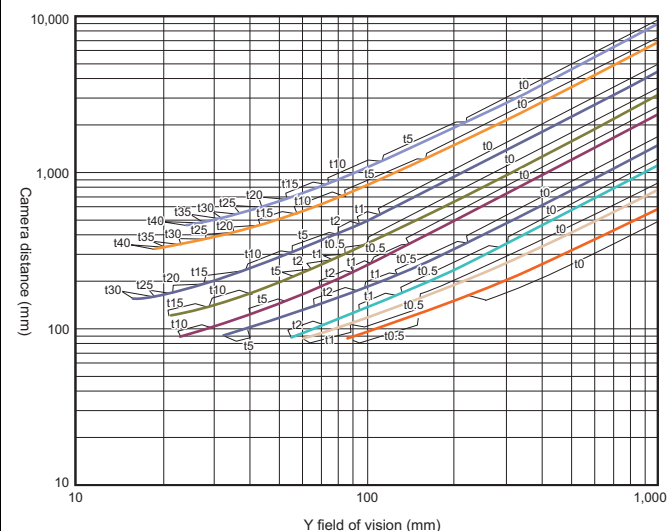

High-speed Digital CMOS Camera FH-S□12 12 million-pixel (Using 3Z4S-LE VS-L/M42-10 Series)

3Z4S-LE

- VS-L10028/M42-10
- VS-L8540/M42-10
- VS-L5028/M42-10
- VS-L3528/M42-10
- VS-L2526/M42-10
- VS-L1828/M42-10

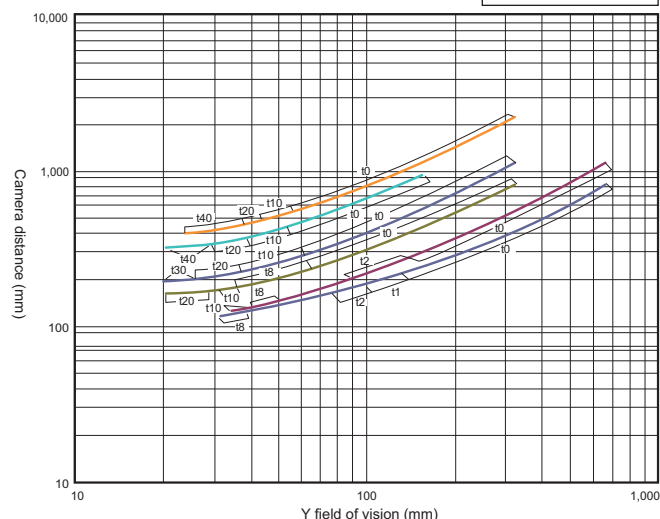


High-speed Digital CMOS Camera FH-S□X12 12 million-pixel (Using 3Z4S-LE VS-HVA Series)

Note: The 3Z4S-LE VS-HVA Series cannot be used with an extension tube.

3Z4S-LE


- VS-HVA1226
- VS-HVA1626
- VS-HVA2524
- VS-HVA3522
- VS-HVA5024

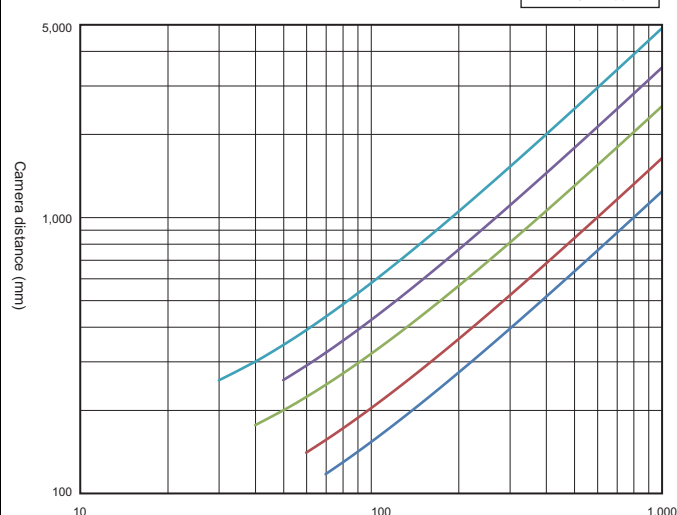

Digital CMOS Camera FH-S□21R 20.4 million-pixel (Using 3Z4S-LE VS-HVA Series)



Note: The 3Z4S-LE VS-HVA Series cannot be used with an extension tube.

3Z4S-LE

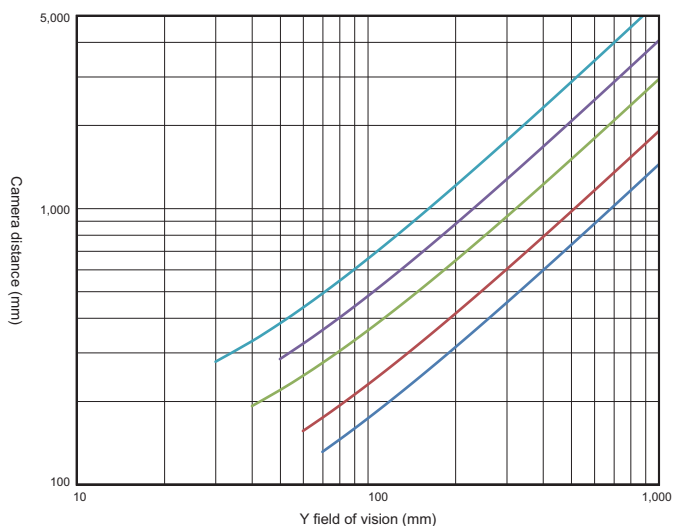


High-speed Digital CMOS Camera FH-S□X12 12 million-pixel (Using 3Z4S-LE VS-LLD Series)

Note: The 3Z4S-LE VS-LDD Series cannot be used with an extension tube.

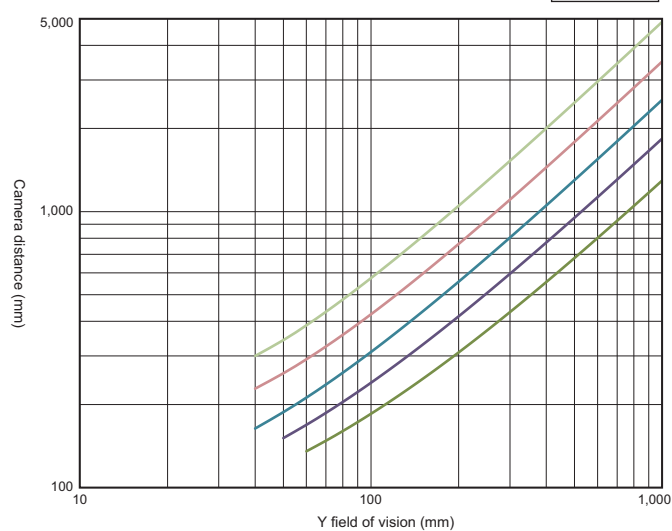



Digital CMOS Camera FH-S□21R 20.4 million-pixel (Using 3Z4S-LE VS-LLD Series)

Note: The 3Z4S-LE VS-LDD Series cannot be used with an extension tube.

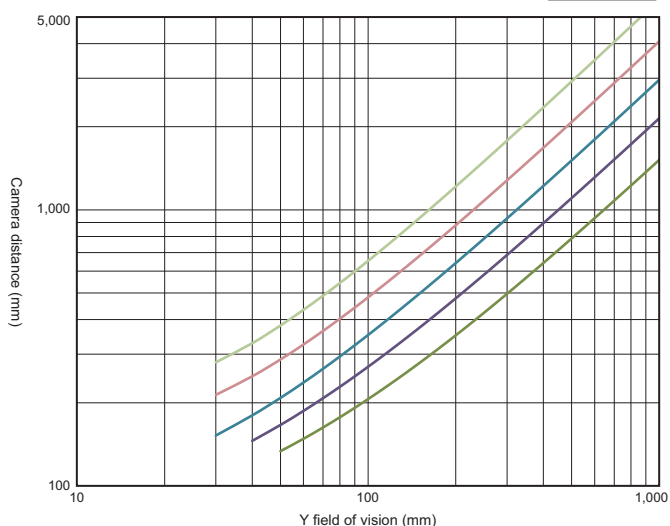

Small Digital CMOS Camera FH-S□X01-SF□ 1.6 million-pixel (Using Edmund Optics manufacturer Blue Series)

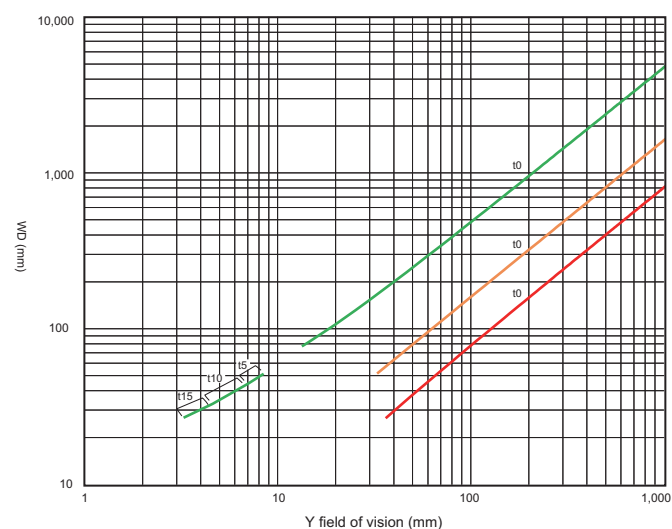

Vibrations and Shocks Resistant Lenses

High-speed Digital CMOS Camera


FH-S□,

Digital CCD Camera

FZ-S□

300,000-pixel

(Using 3Z4S-LE VS-MCA Series)

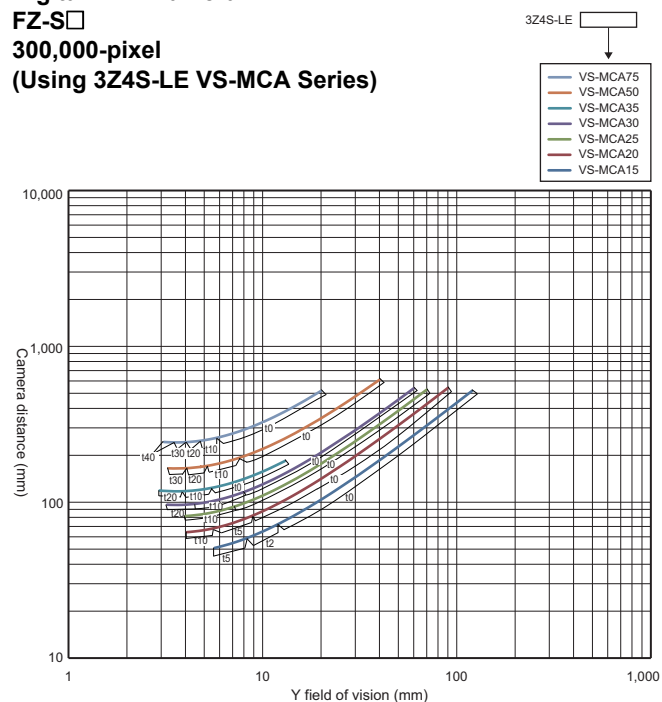

High-speed Digital CMOS Camera

FH-S□X


400,000-pixel

High-speed Digital CMOS Camera

FH-S□X01

1.6 million-pixel

(Using 3Z4S-LE VS-MCA Series)

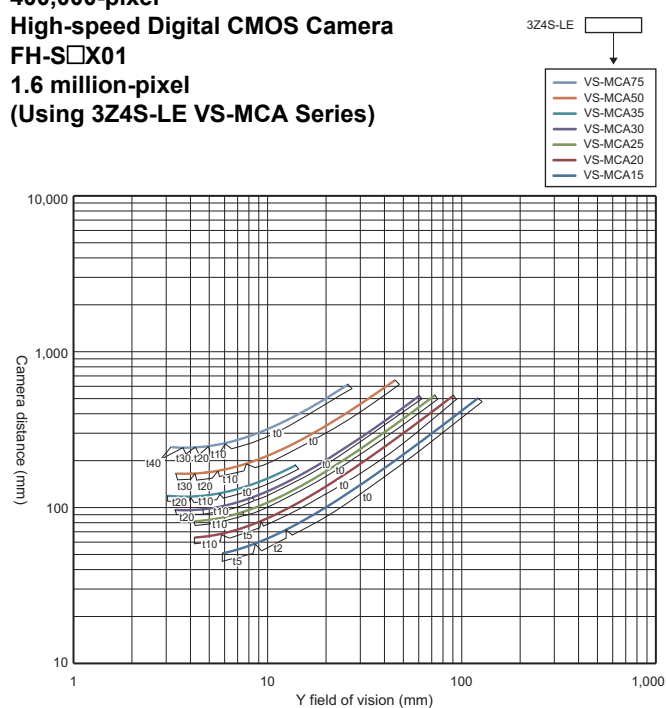


High-speed Digital CMOS Camera

FH-S□X02

2 million-pixel

(Using 3Z4S-LE VS-MCA Series)

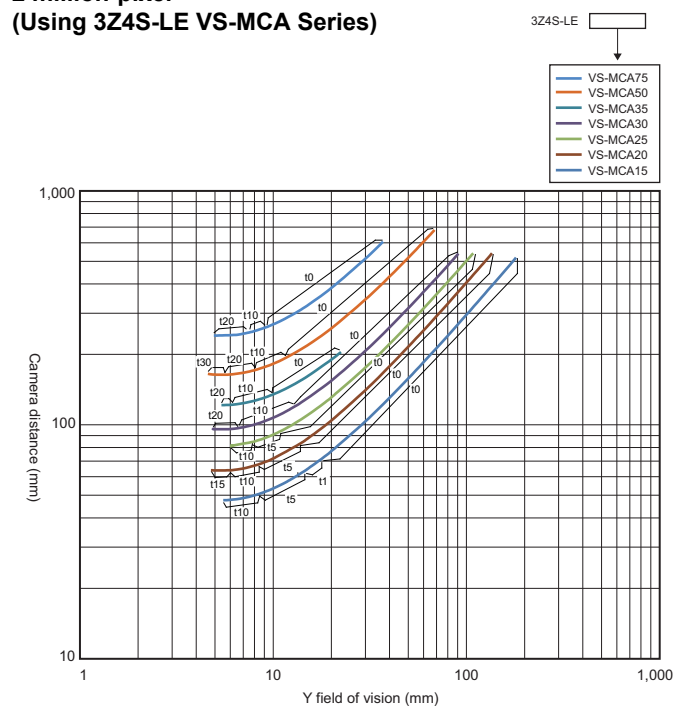


Digital CCD Camera


FZ-S□2M

2 million-pixel


(Using 3Z4S-LE VS-MCA Series)

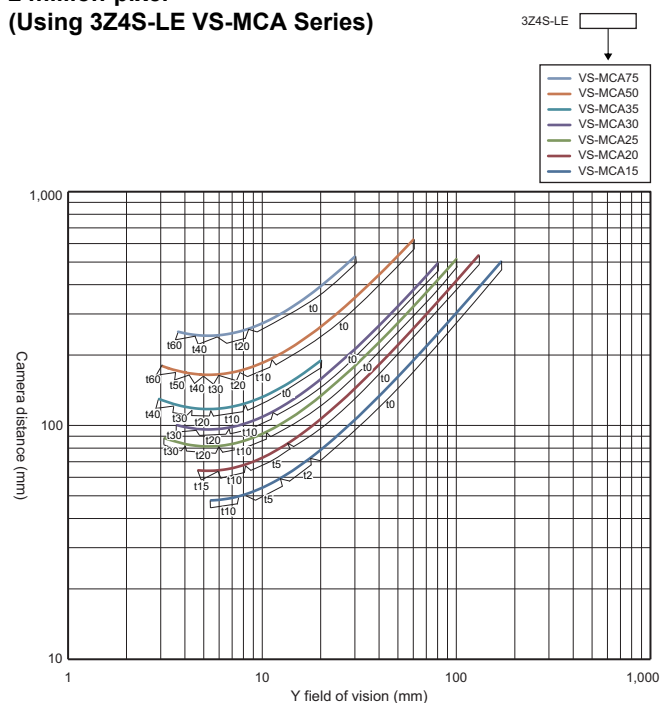


High-speed Digital CMOS Camera FH-S□X03 3.2 million-pixel (Using 3Z4S-LE VS-MCA Series)

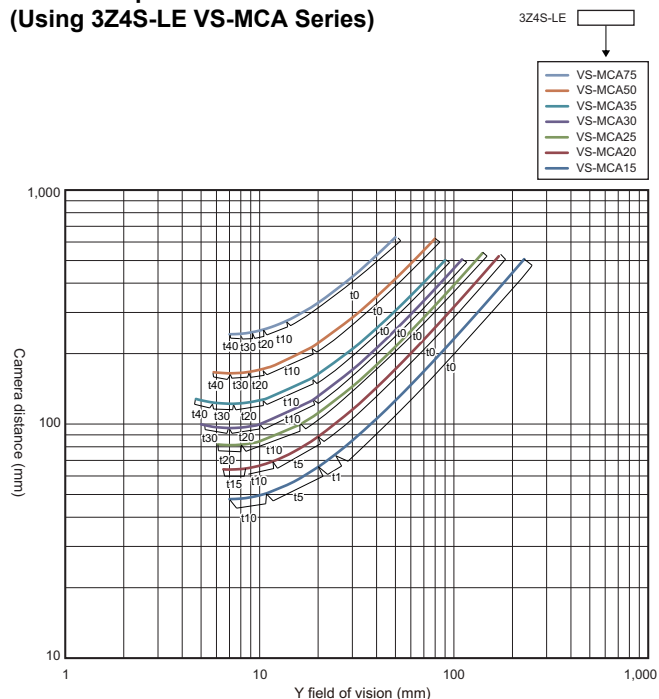


Digital CMOS Camera FZ-S□5M3, High-speed Digital CMOS Camera FH-S□X05 5 million-pixel (Using 3Z4S-LE VS-MCA Series)

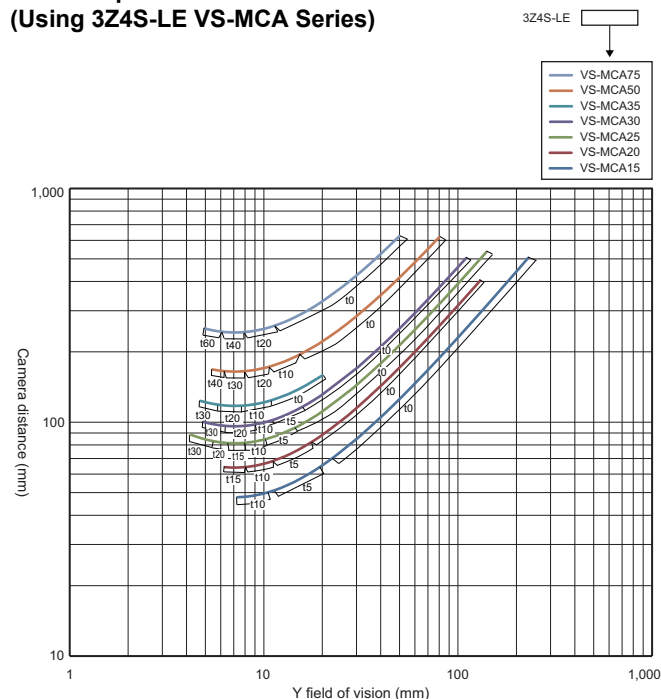


Digital CMOS Camera FH-S□06R 6 million-pixel (Using 3Z4S-LE VS-MCA Series)

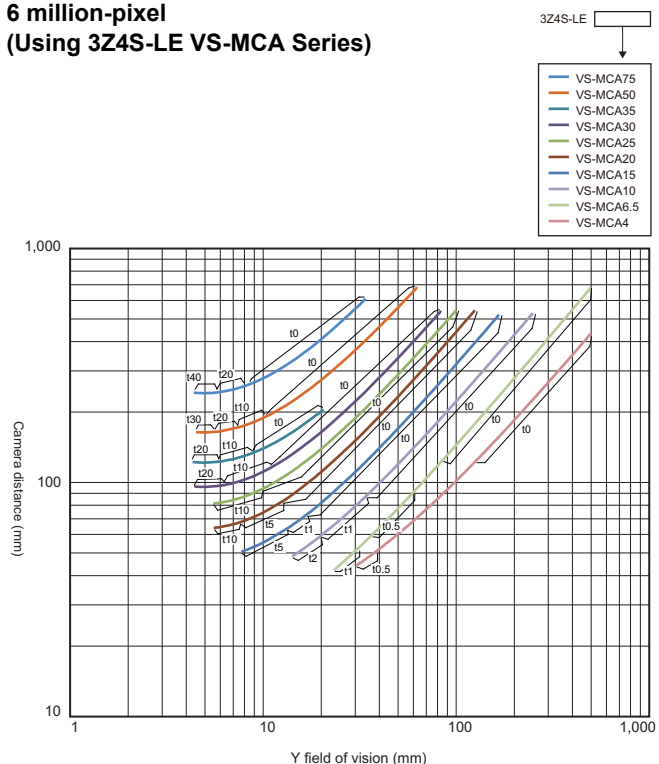


High-speed Digital CMOS Camera FH-S□02 2 million-pixel (Using 3Z4S-LE VS-MCH1 Series)

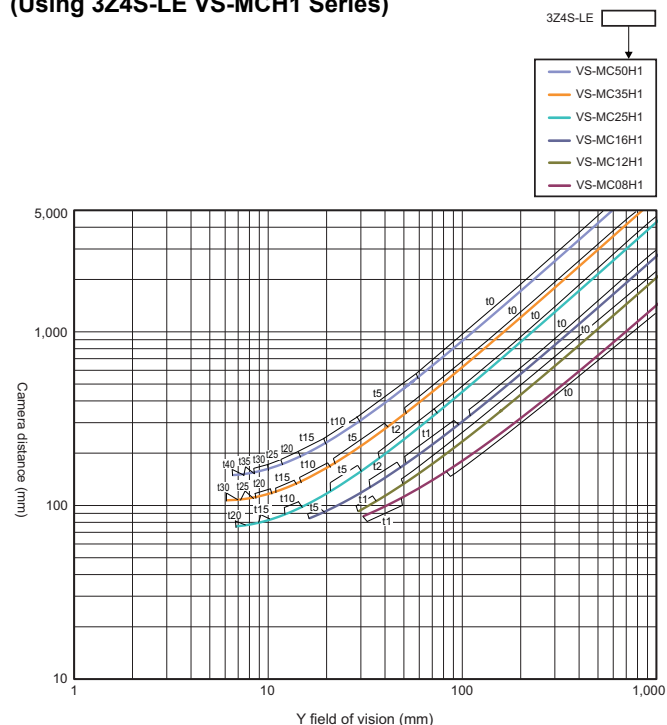

High-speed Digital CMOS Camera FH-S□04 4 million-pixel (Using 3Z4S-LE VS-MCH1 Series)

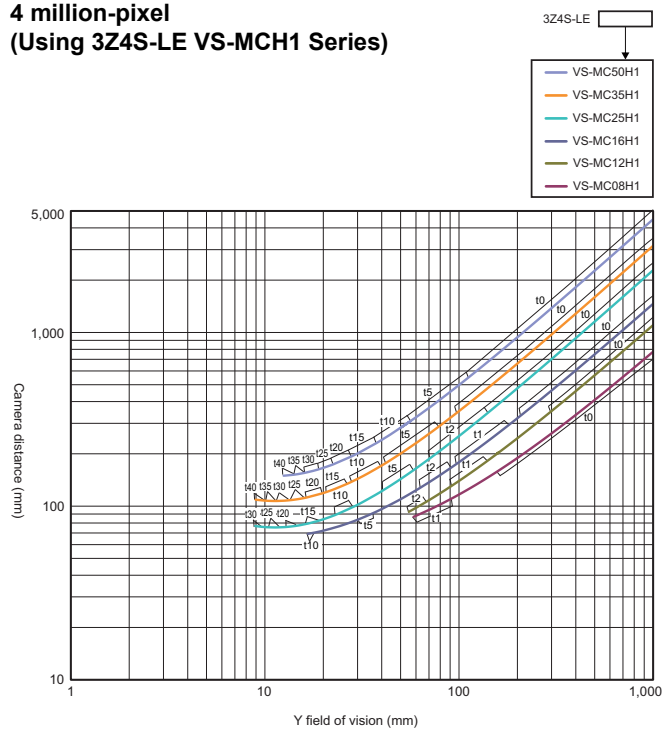

Digital CMOS Camera FH-S□21R 20.4 million-pixel (Using 3Z4S-LE VS-MCH1 Series)

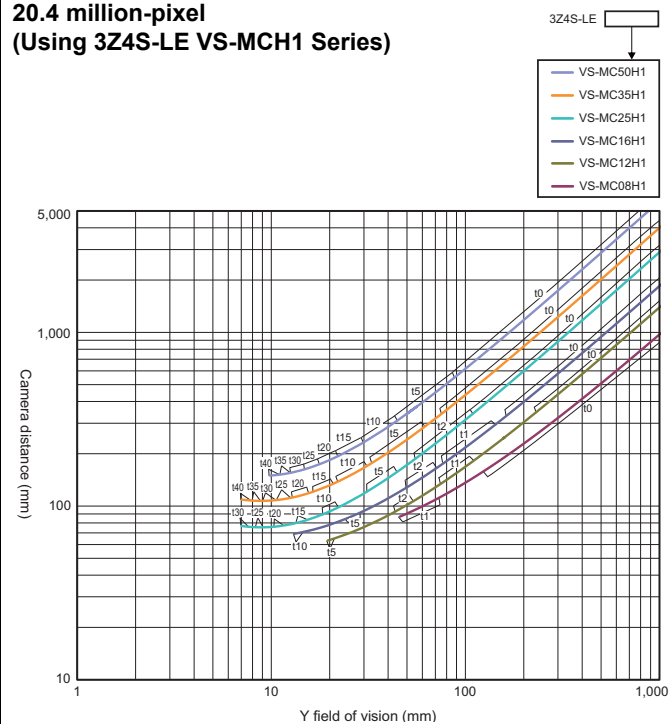

FH-Series

Related Manuals

Man.No.	Model number	Manual
Z365	FH/FHV7	Vision System FH/FHV7 Series User's Manual
Z341	FH/FHV7	Vision System FH/FHV7 series Processing Item Function Reference Manual
Z342	FH/FHV7	Vision System FH/FHV7 Series User's Manual for Communications Settings
Z343	FH/FHV7	Vision System FH/FHV7 Series Operation Manual for Sysmac Studio
Z366	FH	Vision System FH series Hardware Setup Manual
Z367	FH	Vision System FH series Macro Customize Functions Programming Manual
Z437	FH-UMAI	FH Application Software FH-UMAI Processing Item Function Reference Manual
Z438	FH-UMAI	FH Application Software FH-UMAI Version Update Tool Operating Manual
Z510	FH-UMLIC-08	FH Application Software FH-UMLIC-08 Processing Item Function Reference Manual
Z511	FH-UMLIC-08	FH Application Software FH-UMLIC-08 Installation Manual

- Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products.
- Think&See is a trademark or registered trademark of OMRON Corporation in Japan and other countries.
- EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.
- EtherNet/IP® is a trademark of ODVA.
- Microsoft® Visual Studio® and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- QR code is the registered trademark of DENSO WAVE.
- Intel and the Intel logo are trademarks of Intel Corporation in the U.S. and/or other countries.
- Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.
- The product photographs and figures that are used in this catalog may vary somewhat from the actual products.
- The SD Logo is a trademark of SD-3C LLC.
- Microsoft product screen shot(s) reprinted with permission from Microsoft Corporation.
- The permission of Shutterstock.com was received for images that were used.

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability: Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company

Kyoto, JAPAN

Contact : www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands

Tel: (31) 2356-81-300 Fax: (31) 2356-81-388

OMRON ASIA PACIFIC PTE. LTD.

438B Alexandra Road, #08-01/02 Alexandra
Technopark, Singapore 119968

Tel: (65) 6835-3011 Fax: (65) 6835-3011

OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.

Tel: (1) 847-843-7900 Fax: (1) 847-843-7787

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China

Tel: (86) 21-6023-0333 Fax: (86) 21-5037-2388

Authorized Distributor:

©OMRON Corporation 2018-2026 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_31_1

Cat. No. Q197-E1-34 0826 (1118)